

## 300W, 9 to 53V or 9 to 36V Input Non-Isolated Buck-Boost DC-DC Converter



Industrial



Test





COMM



Broadcast



Robotics



The i7C series of non-isolated step-up / step-down converters are ideal for generating additional DC output voltage rails up to 300 W from a single output 12V, 24V or 48V AC-DC power supply. The highly efficient i7C series accepts a very wide DC input and has a wide output adjustment range. Three mechanical configurations are available; low profile open frame, baseplate construction for conduction cooling, or integral heat sink for convection or forced air cooling. Full feature(\*) options are available including output current monitoring (Imon), switching frequency synchronization (Sync) and power good (PG) or output current limit adjust (Itrim).

Features	Benefits
• Up to 300W in a 1/16th Brick Pin-Out	• High Power Density, Less Board Area Needed
• High Efficiency - Up to 97%	• Longer Battery Life / Low Power Consumed
• Wide 5 to 28V, 8 to 24V or 9.6 to 48V Output Adjustment	• One Part Supports Multiple System Voltages
• Wide 9 to 36V or 9 to 53V Input Range	• Compatible With a Wide Range of DC Source Voltages
• Low Component Count With Minimal External Components	• Low Cost
• Low Airflow With Minimal Derating Requirements	• Easy To Cool In End System

### Model Selector

Model	Input Voltage (V)	Output Voltage (V)	Max Current (A)	Max Power (W)	Remote ON/OFF Logic	Full Feature(*)		Integrated Heatsink	Integrated Baseplate
						Imon, Sync	PG or Itrim		
<a href="#">i7C4W008A120V-001-R</a>	9 - 53	9.6 - 48	8	300	Negative	-	-	-	-
<a href="#">i7C4W008A120V-002-R</a>	9 - 53	9.6 - 48	8	300	Positive	Yes	PG	-	-
<a href="#">i7C4W008A120V-003-R</a>	9 - 53	9.6 - 48	8	300	Negative	Yes	PG	-	-
<a href="#">i7C4W008A120V-0C1-R</a>	9 - 53	9.6 - 48	8	300	Negative	-	-	-	Yes
<a href="#">i7C4W008A120V-0C3-R</a>	9 - 53	9.6 - 48	8	300	Negative	Yes	PG	-	Yes
<a href="#">i7C4W008A120V-0F1-R</a>	9 - 53	9.6 - 48	8	300	Negative	-	-	Yes	-
<a href="#">i7C4W008A120V-0F3-R</a>	9 - 53	9.6 - 48	8	300	Negative	Yes	PG	Yes	-
<a href="#">i7C4W008A120V-P03-R</a>	9 - 53	9.6 - 48	8	300	Negative	Yes	Itrim	-	-
<a href="#">i7C4W008A120V-PC3-R</a>	9 - 53	9.6 - 48	8	300	Negative	Yes	Itrim	-	Yes
<a href="#">i7C4W008A120V-PF3-R</a>	9 - 53	9.6 - 48	8	300	Negative	Yes	Itrim	Yes	-
<a href="#">i7C4W012A050V-001-R</a>	9 - 53	5 - 28	12.5	300	Negative	-	-	-	-
<a href="#">i7C4W012A050V-002-R</a>	9 - 53	5 - 28	12.5	300	Positive	Yes	PG	-	-
<a href="#">i7C4W012A050V-003-R</a>	9 - 53	5 - 28	12.5	300	Negative	Yes	PG	-	-
<a href="#">i7C4W012A050V-0C1-R</a>	9 - 53	5 - 28	12.5	300	Negative	-	-	-	Yes
<a href="#">i7C4W012A050V-0C3-R</a>	9 - 53	5 - 28	12.5	300	Negative	Yes	PG	-	Yes
<a href="#">i7C4W012A050V-0F1-R</a>	9 - 53	5 - 28	12.5	300	Negative	-	-	Yes	-
<a href="#">i7C4W012A050V-0F3-R</a>	9 - 53	5 - 28	12.5	300	Negative	Yes	PG	Yes	-
<a href="#">i7C4W012A050V-P03-R</a>	9 - 53	5 - 28	12.5	300	Negative	Yes	Itrim	-	-
<a href="#">i7C4W012A050V-PC3-R</a>	9 - 53	5 - 28	12.5	300	Negative	Yes	Itrim	-	Yes
<a href="#">i7C4W012A050V-PF3-R</a>	9 - 53	5 - 28	12.5	300	Negative	Yes	Itrim	Yes	-
<a href="#">i7C2W020A120V-001-R</a>	9 - 36	8 - 24	20	300	Negative	-	-	-	-
<a href="#">i7C2W020A120V-002-R</a>	9 - 36	8 - 24	20	300	Positive	Yes	PG	-	-
<a href="#">i7C2W020A120V-003-R</a>	9 - 36	8 - 24	20	300	Negative	Yes	PG	-	-
<a href="#">i7C2W020A120V-0C1-R</a>	9 - 36	8 - 24	20	300	Negative	-	-	-	Yes
<a href="#">i7C2W020A120V-0C3-R</a>	9 - 36	8 - 24	20	300	Negative	Yes	PG	-	Yes
<a href="#">i7C2W020A120V-0F1-R</a>	9 - 36	8 - 24	20	300	Negative	-	-	Yes	-
<a href="#">i7C2W020A120V-0F3-R</a>	9 - 36	8 - 24	20	300	Negative	Yes	PG	Yes	-
<a href="#">i7C2W020A120V-P03-R</a>	9 - 36	8 - 24	20	300	Negative	Yes	Itrim	-	-
<a href="#">i7C2W020A120V-PC3-R</a>	9 - 36	8 - 24	20	300	Negative	Yes	Itrim	-	Yes
<a href="#">i7C2W020A120V-PF3-R</a>	9 - 36	8 - 24	20	300	Negative	Yes	Itrim	Yes	-

Preferred model \* Contact Technical Support for other part number suffix and feature combinations.

Specification				
Model		i7C4W012A050V	i7C4W008A120V	i7C2W020A120V
<b>Input</b>				
Input Voltage range	Vdc	9 - 53 (Turn on at 9.5V typ)		9 - 36 (Turn on at 9.5V typ)
Input Current (max)	A	25		30
Standby Input Current (typ)	mA	0.25 (Nominal input, ON/OFF = OFF)		
No Load Input Current, Vin = 24 V (typ)	mA	5.0 (Vo = 12 V)		5.0 (Vo = 24 V)
Efficiency	%	91 - 96	93 - 97	94 - 97
Safety Certifications and Markings	-	IEC/EN/UL/CSA/EN62368-1, 60950-1, CE Mark and UKCA Mark		
<b>Output</b>				
Output Voltage Tolerance	%	± 4		
Switching Frequency	kHz	250		
Line Regulation	%	0.8	0.8	0.8
Load Regulation	%	0.8	0.5	0.8
External Load Capacitance	uF	330 - 3000		1000 - 5000
Ripple & Noise	mV	200	180	200
Overcurrent Protection Threshold (typ)	A	17	15	26
Overcurrent Limit Adjustment Range (-Px3-R)	A	3 - 17	2 - 15	3 - 20
Overcurrent Limit Adjustment Tolerance	%	±8		
Overtemperature Protection	-	Yes		
Remote Sense	-	(+) Sense, compensating up to 5% of output voltage		
Remote On/Off	-	See Model Selector		
Power Good	-	Optional (Full Feature Version, -0x3-R suffix)		
Frequency Synchronization (Sync)	-	Optional (Full Feature Version)		
Current Monitor	-	Optional (Full Feature Version)		
Overcurrent Limit Adjust (Itrim)	-	Optional (Full Feature Version, -Px3-R suffix)		
Series Operation	-	Not possible		
<b>Environmental</b>				
Operating Temperature	°C	-40 to 125 (See <a href="#">i7C4W Specification</a> ; <a href="#">i7C2W Specification</a> for Derating)		
Storage Temperature	°C	-55 to 125		
Humidity (non condensing)	%RH	5 - 95 (Operating & Storage)		
Cooling	-	Convection, conduction (baseplate) or forced air		
Altitude <sup>(2)</sup>	m	2000		
<b>Other</b>				
Weight (Typ)	g	Open Frame: 25 Baseplate: 50 Heatsink: 70		Open Frame: 28 Baseplate: 56 Heatsink: 75
Size (LxWxH)	mm	Open Frame: 34 x 36.8 x 11.87 With Baseplate: 34 x 36.8 x 13.0 With Heatsink: 34 x 36.8 x 24.9		34 x 36.8 x 14.35 34 x 36.8 x 15.5 34 x 36.8 x 24.9
Size (LxWxH)	Inches	Open Frame: 1.34 x 1.45 x 0.5 With Baseplate: 1.34 x 1.45 x 0.51 With Heatsink: 1.34 x 1.45 x 0.98		1.34 x 1.45 x 0.58 1.34 x 1.45 x 0.61 1.34 x 1.45 x 0.98
MTBF - Telcordia SR-332	-	> 10 Mhrs; 100% Load; Ta = 40 °C		
Warranty	yrs	3		

## Notes


(1) See website for detailed specifications and test methods.

(2) Contact Technical Support for operation at higher altitudes.


Related Products		
Type	Part Number	Description
DC-DC Buck-Boost Converter	<a href="#">i1C</a>	200W, Input 9-36V or 18-75, Output 9.6-28V, 1x1 inch Footprint
DC-DC Buck Converter	<a href="#">i3A</a>	100W, Input 9-53V, Output 5-30V 4.5A or 3.3-16.5V 8A
DC-DC Buck Converter	<a href="#">i6A4W</a>	250W, Input 9-53V, Output 3.3-40V 10A or 3.3-15V 20A
DC-DC Buck Converter	<a href="#">i7A</a>	400-750W, Input 9-18V, 18-60V or 18-32V, Output 0.8-8V 60A; 3.3-24V 33A or 3.3-18V 45A
DC-DC Buck Converter, Ruggedized	<a href="#">RGA</a>	250W, Input 9-40V and Output 3.3-24V or, 9-53V Input and Output 3.3V up to 40V
DC-DC Buck Converter, Ruggedized	<a href="#">RGB</a>	400-750W, 9-18Vin, 0.8-8Vo 60A; 18-32Vin, 3.3-18Vo 45A, 18-60Vin, 3.3-24Vo 33A
DC-DC Buck-Boost Converter, Ruggedized	<a href="#">RGC</a>	300W, Input 9-53V, Output 9.6-48V, 8A; or, 5-28V, 12.5A
Evaluation Kit	<a href="#">i7C08A-C03-EVK-S1</a>	Evaluation kit with i7C4W008A120V-003-R Full Featured Module
	<a href="#">i7C12A-C03-EVK-S1</a>	Evaluation kit with i7C4W012A050V-003-R Full Featured Module
	<a href="#">i7C20A-C03-EVK-S1</a>	Evaluation kit with i7C2W020A120V-003-R Full Featured Module
	<a href="#">i7C08A-CC3-EVK-P2</a>	Evaluation kit with two (2) i7C4W008A120V-P03-R Modules in Parallel
	<a href="#">i7C12A-CC3-EVK-P2</a>	Evaluation kit with two (2) i7C4W012A050V-P03-R Modules in Parallel
	<a href="#">i7C20A-CC3-EVK-P2</a>	Evaluation kit with two (2) i7C2W020A120V-P03-R Modules in Parallel

## Typical Application Circuit


### i7C4W (-0xx-R suffix)

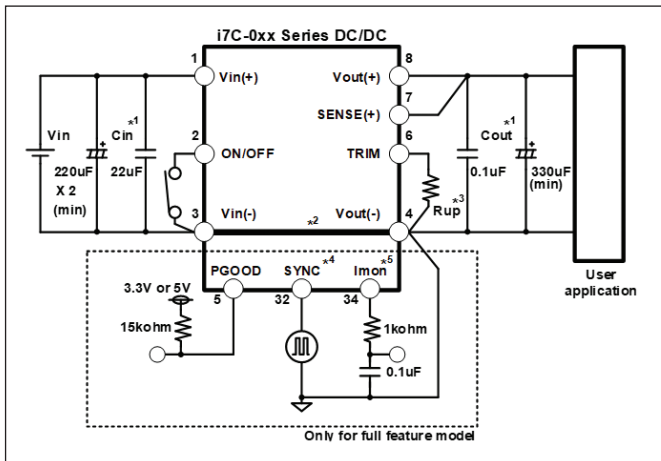


### i7C2W (-0xx-R suffix)

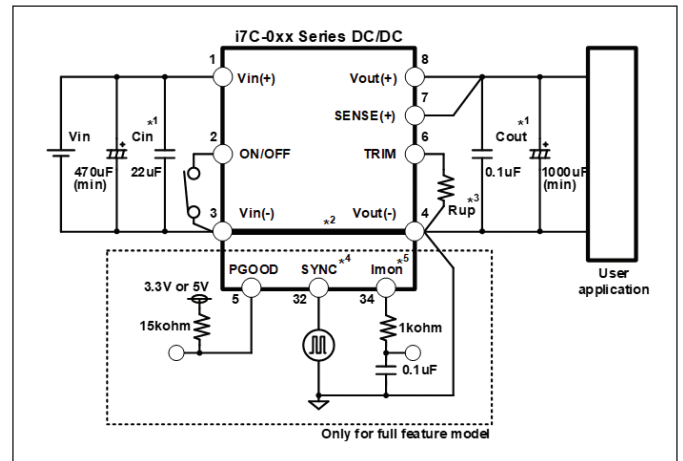

### i7C4W (-Px3-R suffix with Output Current Limit Adjust)

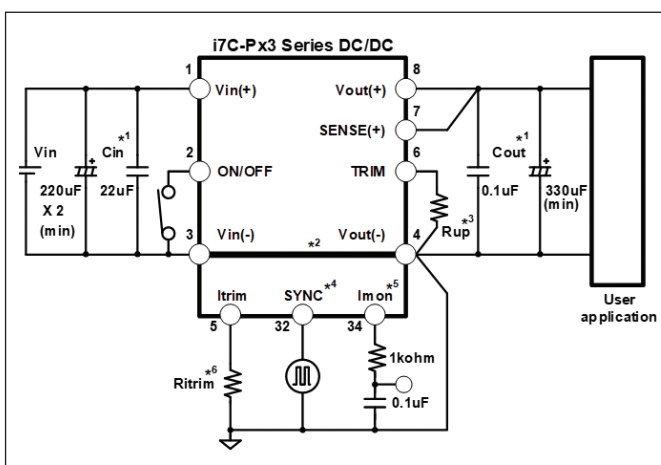




### i7C2W (-Px3-R suffix with Output Current Limit Adjust)

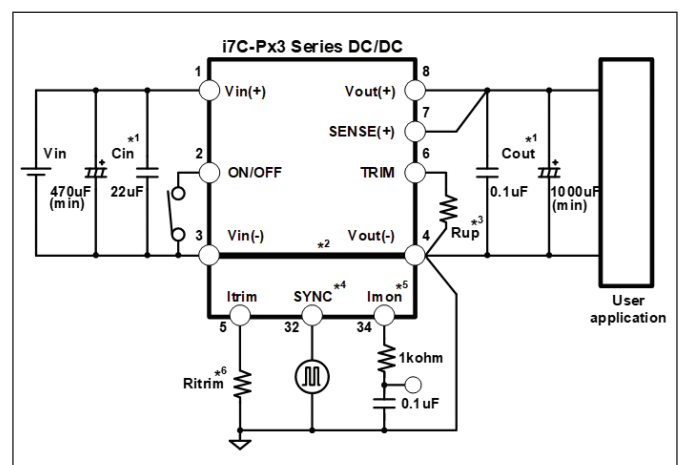




#### Recommendations:

1. Cin/Cout MLCC should be connected to the i7C module as close as possible in order to reject high-frequency noise.
2. Connect Vin(-) and Vout(-) to copper ground plane underneath the i7C module.
3. TRIM resistor "Rup" should be connected to the i7C module as close as possible.
4. SYNC must be connected to GND when not in use.
5. External R-C filter may need for Current Monitor.
6. Current limit TRIM resistor "Ritrim" should be connected to the i7C module as close as possible.




**Operating Range i7C4W008A120V**

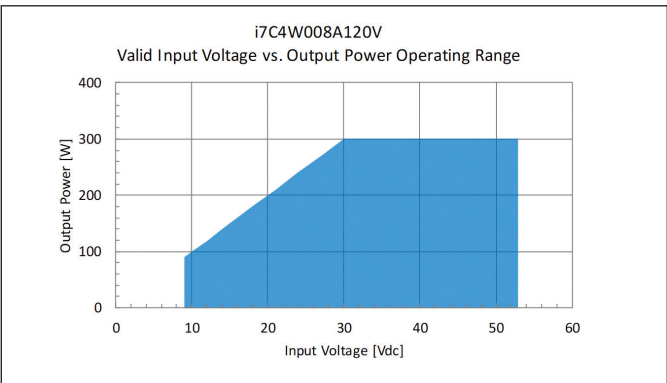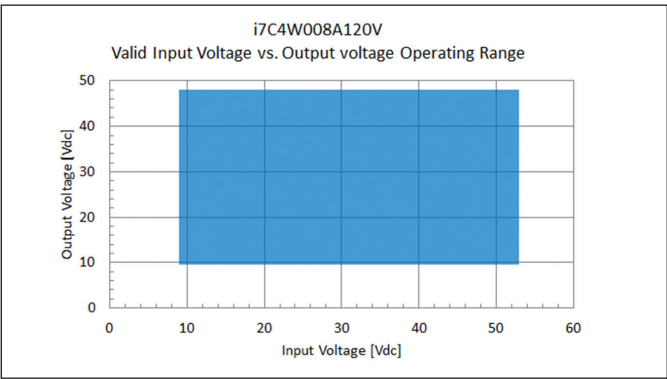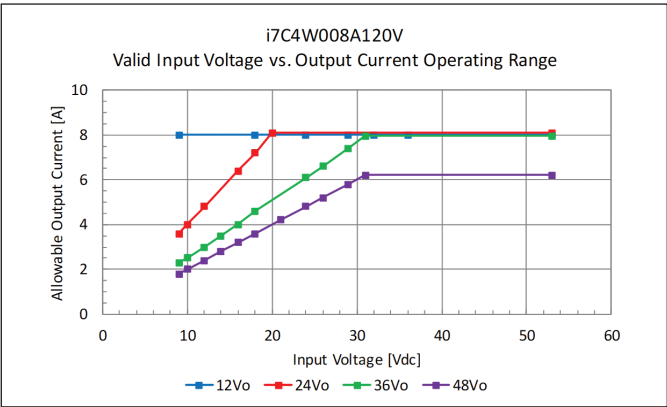

**Operating Range i7C4W012A050V**

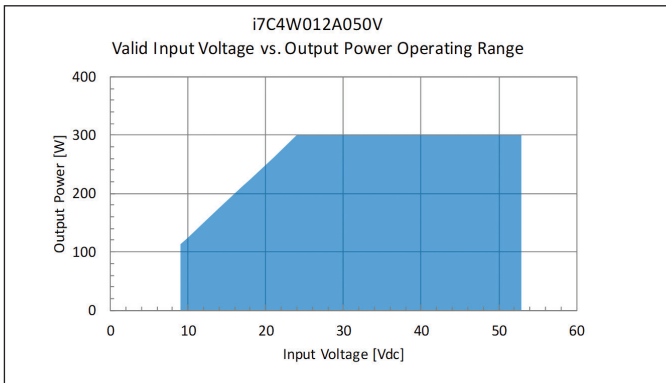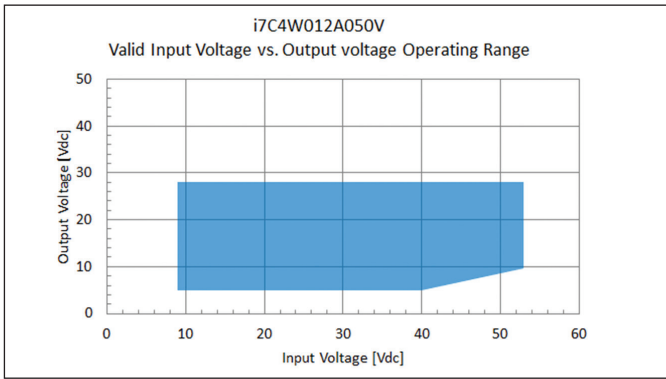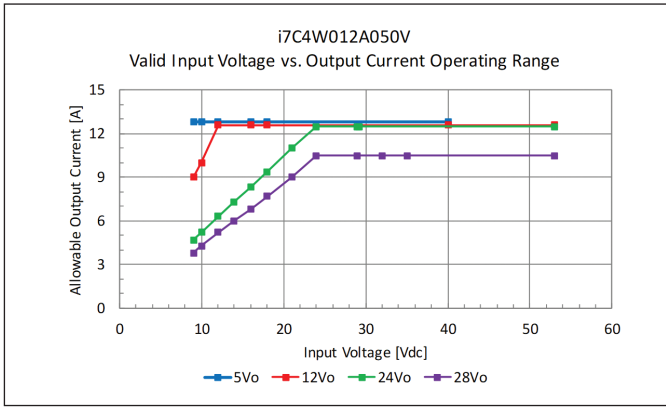


## Operating Range i7C2W020A120V

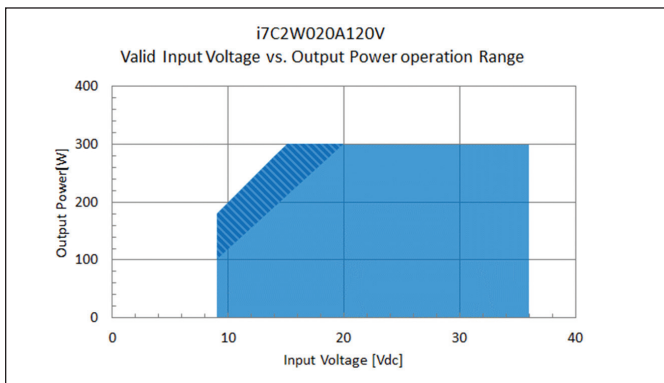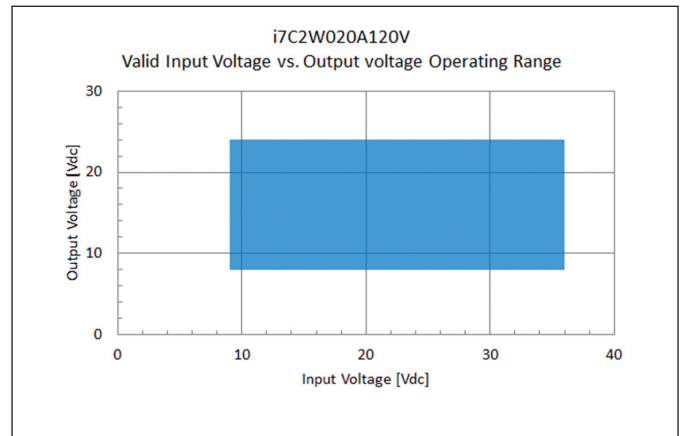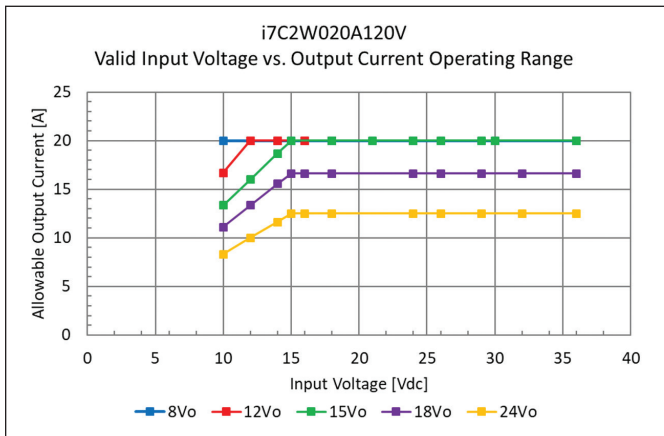


Wider output regulation tolerance (dark blue shaded region) expected during step-up/boost Operation when  $V_{in} < 20V$ ,  $P_{out} > 100W$ . See i7C2W Specifications for related load regulation charts.

## Mechanical Specification

### i7C4W (-x0x-R suffix Openframe)

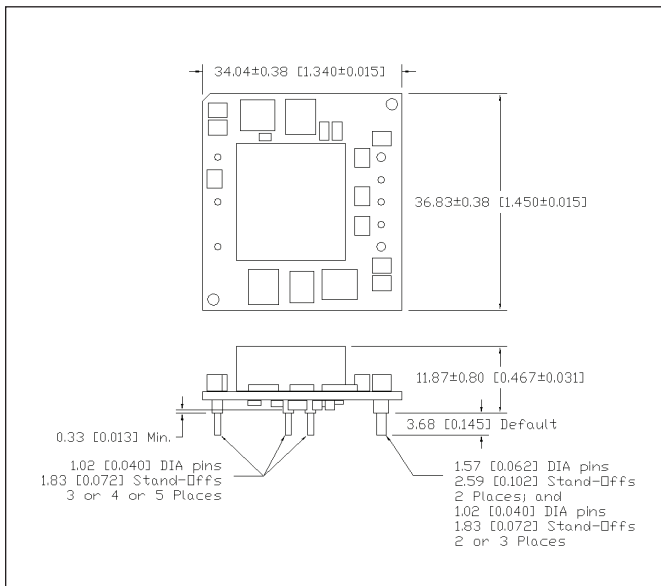


### i7C2W (-x0x-R suffix Openframe)

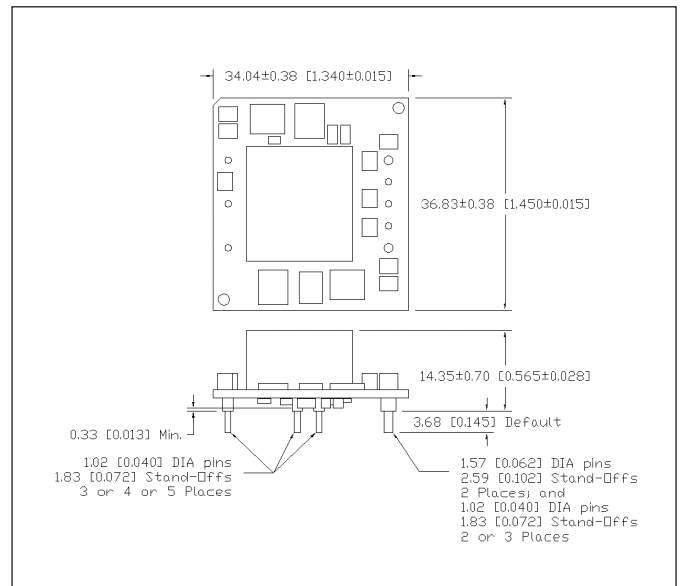


**Mechanical Specification**


**i7C4W (-xCx-R suffix Baseplate)**

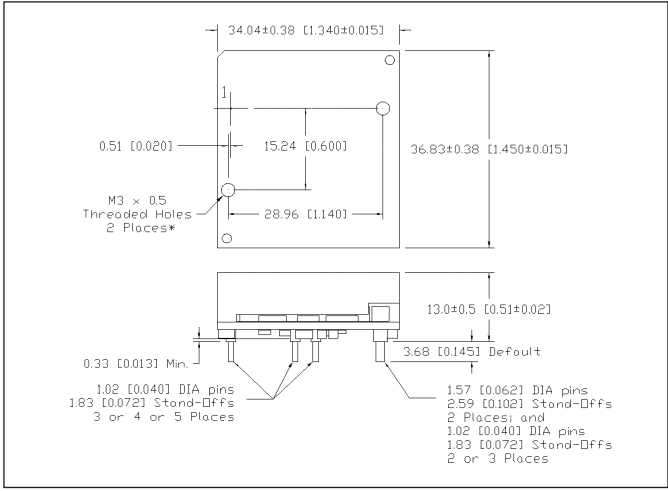


**i7C2W (-xCx-R suffix Baseplate)**

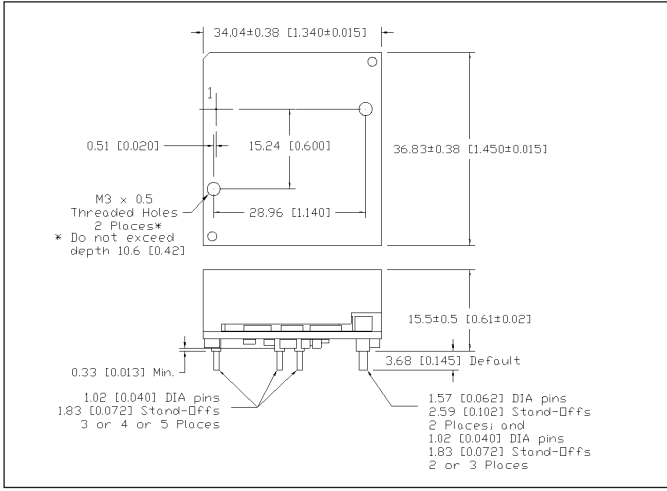


**i7C4W (-xFx-R suffix Heatsink)**

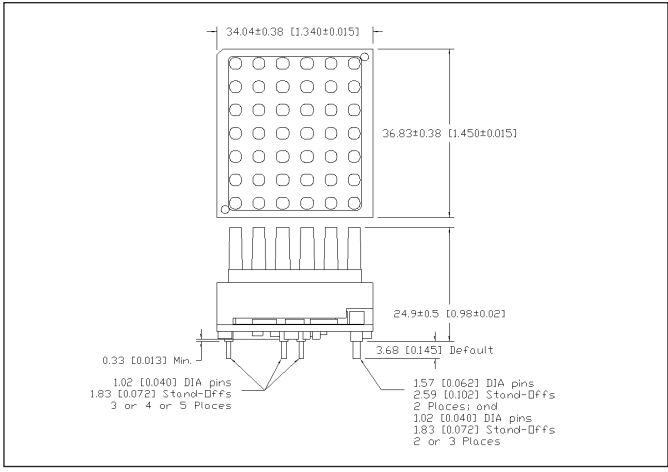


**i7C2W (-xFx-R suffix Heatsink)**

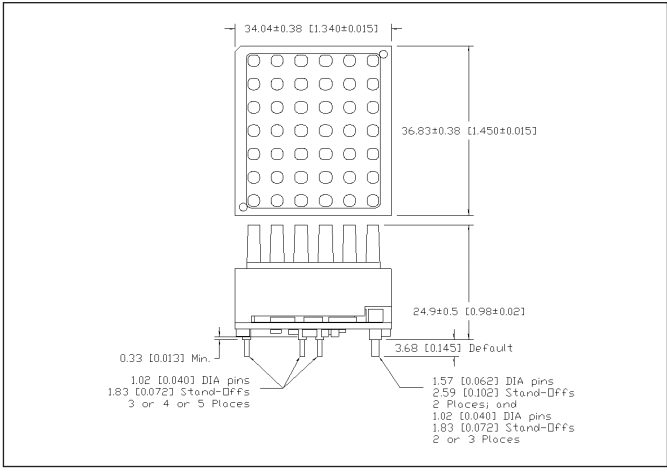

**Recommended Hole Pattern (-xx1-R suffix)**

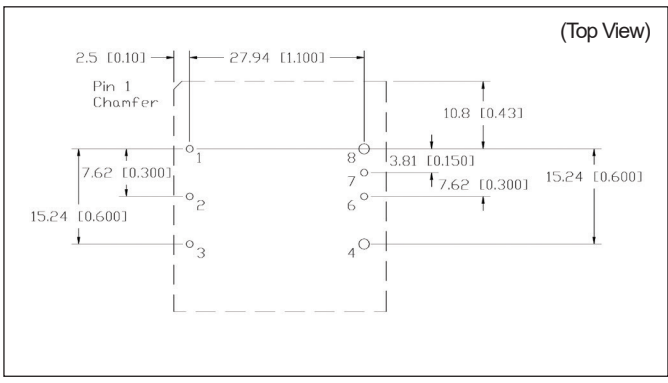

**Recommended Hole Pattern (-xx2-R; -xx3-R suffix)**

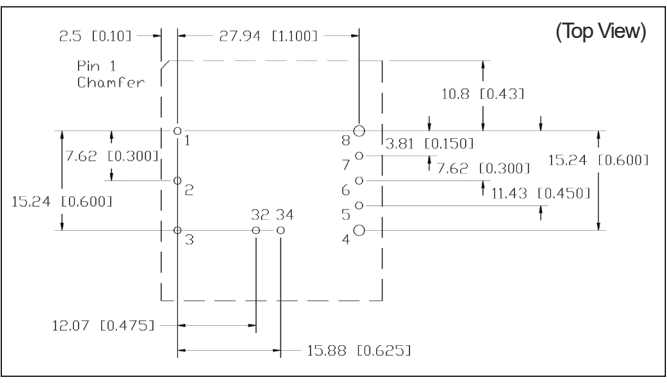

Pinout			
PIN	Function	PIN	Function
1	Vin (+)	6	TRIM
2	On / Off	7	SENSE +
3	Vin (-) / GND	8	Vout (+)
4	Vout (-) / GND	32	Sync (option)
5	Power Good or Itrim (option)	34	Imon (option)

- Note:
- 1) Dimensions are in mm [inch].
  - 2) Pin base material is brass or copper with gold over nickel plating.
  - 3) Baseplate and heatsink are not connected to ground (floating).



**TDK-Lambda France SAS**

Tel: +33 1 60 12 71 65  
 tff.fr-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/fr



**Italy Sales Office**

Tel: +39 02 61 29 38 63  
 tff.it-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/it



**Netherlands**

tff.nl-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/nl



**TDK-Lambda Germany GmbH**

Tel: +49 7841 666 0  
 tlg.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/de



**Austria Sales Office**

Tel: +43 2256 655 84  
 tlg.at-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/at



**Switzerland Sales Office**

Tel: +41 44 850 53 53  
 tlg.ch-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/ch



**Nordic Sales Office**

Tel: +45 8853 8086  
 tlg.dk-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/dk



**TDK-Lambda UK Ltd.**

Tel: +44 (0) 12 71 85 66 66  
 tlu.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/uk



**TDK-Lambda Ltd.**

Tel: +9 723 902 4333  
 tli.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/il-en



**TDK-Lambda Americas**

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
 tla.powersolutions@tdk.com  
 www.us.lambda.tdk.com



**TDK Electronics do Brasil Ltda**

Tel: +55 11 3289-9599  
 sales.br@tdk-electronics.tdk.com  
 www.tdk-electronics.tdk.com/en



**TDK-Lambda Corporation**

Tel: +81-3-6778-1113  
 www.jp.lambda.tdk.com



**TDK-Lambda (China) Electronics Co. Ltd.**

Tel: +86 21 6485-0777  
 tlc.powersolutions@tdk.com  
 www.lambda.tdk.com.cn



**TDK-Lambda Singapore Pte Ltd.**

Tel: +65 6251 7211  
 tfs.marketing@tdk.com  
 www.sg.lambda.tdk.com



**TDK India Private Limited, Power Supply Division**

Tel: +91 80 4039-0660  
 mathew.philip@tdk.com  
 www.sg.lambda.tdk.com

