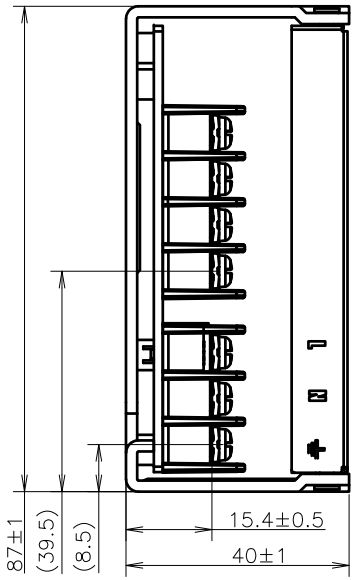

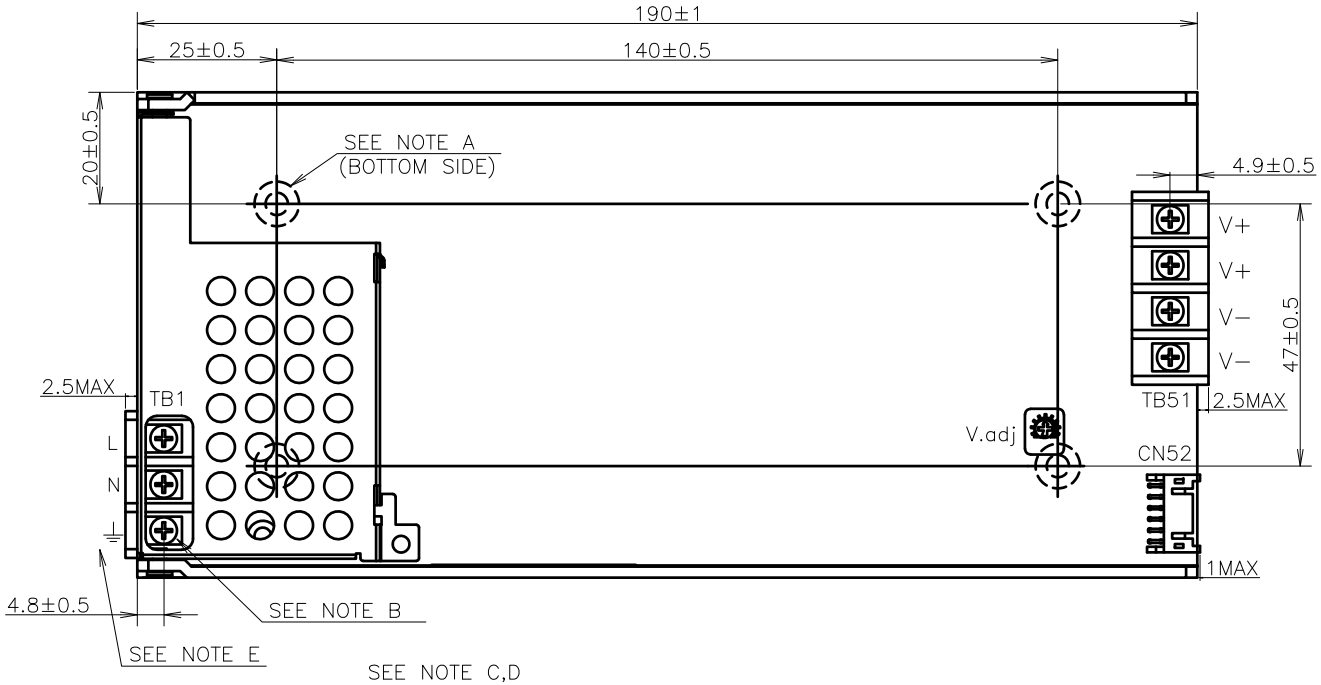

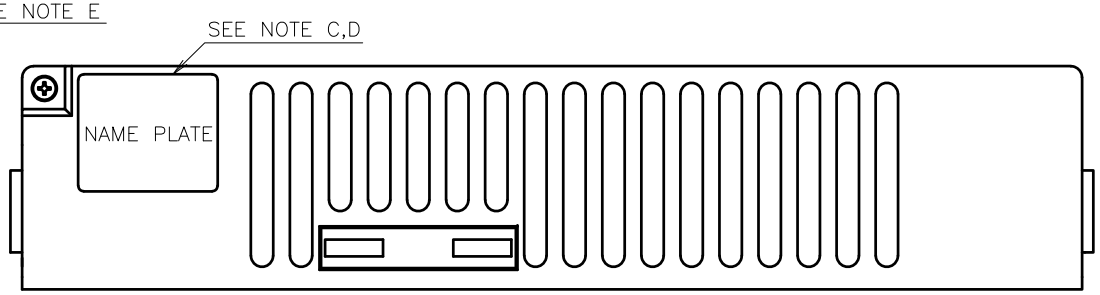



PIN No.	CONFIGURATION	FUNCTION
1	STBY+	+5V,0.5A FOR STBY
2	STBY−	RETURN OF STBY
3	NC	NO CONNECTION
4	NC	NO CONNECTION
5	R−	REMOTE ON/OFF −
6	R+	REMOTE ON/OFF +
7	PG−	POWER GOOD−
8	PG+	POWER GOOD+
9	NC	NO CONNECTION
10	TOVP	FOR INTERNAL TEST
11	S−	REMOTE SENSE−
12	S+	REMOTE SENSE+

NOTES

A : M4 TAPPED HOLES (4) FOR CUSTOMER CHASSIS MOUNTING.
SCREW PENETRATION DEPTH 4mm MAX, RECOMMENDED TORQUE : 1.27N·m(13kgf·cm)

B : M3 SCREWS(7) FOR I/P & O/P TB, RECOMMENDED TORQUE: 0.49N·m(5.0kgf·cm)

C : MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE,
MAXIMUM OUTPUT CURRENT AND SAFETY MARKING(FOR ONLY APPROVED PRODUCTS)
ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

D : COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.

E : ⏚ IS FOR SAFETY GROUND CONNECTION.

CONNECTORS USED:

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
CN52	S12B−PHDSS(LF)(SN)	J.S.T	1
TB1	B825−01−03P−K	TIANLI	1
TB51	B825−01−04P−K	TIANLI	1

(unit : mm)

MODEL NAME	CME350A

TDK-Lambda

CA847−02−01D