

DELIVERY SPECIFICATION

SPEC. No. A-ISOFT-c

D A T E : Jun, 2019

To

Non-Controlled Copy

CUSTOMER'S PRODUCT NAME	TDK PRODUCT NAME MULTILAYER CERAMIC CHIP CAPACITORS (Soft Termination) Tape packaging 【RoHS compliant】 CNA5, CNA6 Type X7R Characteristics
-------------------------	--

Please return this specification to TDK representatives with your signature.
 If orders are placed without returned specification, please allow us to judge that specification is accepted by your side.

RECEIPT CONFIRMATION

DATE: YEAR MONTH DAY

Test conditions in this specification based on AEC-Q200 for automotive application.

TDK Corporation
 Sales
 Electronic Components
 Sales & Marketing Group

Engineering
 Electronic Components Business Company
 Ceramic Capacitors Business Group

APPROVED	Person in charge

APPROVED	CHECKED	Person in charge

■ CATALOG NUMBER CONSTRUCTION

CNA	6	P	1	X7R	1H	106	K	250	A	E
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)

(1) Series

(2) Dimensions L x W (mm)

Dimensions code	EIA	Length	Width	Terminal width
5	CC1206	3.20	1.60	0.30
6	CC1210	3.20	2.50	0.50

(3) Thickness code

Code	Thickness
L	1.60mm
P	2.50mm

(4) Voltage condition for life test

Symbol	Condition
1	1 x R.V.

(5) Temperature characteristics

Temperature characteristics	Capacitance change	Temperature range
X7R	±15%	-55 to +125°C

(6) Rated voltage (DC)

Code	Voltage (DC)
2A	100V
1N	75V
1H	50V
1C	16V

(7) Nominal capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point.

(Example)0R5 = 0.5pF
 101 = 100pF
 225 = 2,200,000pF = 2.2μF

(8) Capacitance tolerance

Code	Tolerance
K	±10%

(9) Thickness

Code	Thickness
160	1.60mm
250	2.50mm

(10) Packaging style

Code	Style
A	178mm reel, 4mm pitch

(11) Special reserved code

Code	Description
E	Soft termination

SCOPE

This delivery specification shall be applied to Multilayer ceramic chip capacitors to be delivered to _____.

PRODUCTION PLACES

Production places defined in this specification shall be TDK Corporation, TDK(Suzhou)Co.,Ltd and TDK Components U.S.A.,Inc.

PRODUCT NAME

The name of the product to be defined in this specifications shall be CNA◇◇◇○○○△△□□□×T※※※A.

REFERENCE STANDARD

JIS C 5101-1 : 2010	Fixed capacitors for use in electronic equipment-Part 1: Generic specification
C 5101-22 : 2014	Fixed capacitors for use in electronic equipment-Part22 : Sectional specification : Fixed surface mount multilayer capacitors of ceramic dielectric,Class 2
C 0806-3 : 2014	Packaging of components for automatic handling - Part 3: Packaging of surface mount components on continuous tapes
JEITA RCR-2335 C 2014	Safety application guide for fixed ceramic capacitors for use in electronic equipment

CONTENTS

- | | |
|----------------------------------|---|
| 1. CODE CONSTRUCTION | 11. CAUTION FOR SOFT TERMINATION PRODUCTS |
| 2. OPERATING TEMPERATURE RANGE | 12. CAUTION |
| 3. STORING CONDITION AND TERM | 13. TAPE PACKAGING SPECIFICATION |
| 4. P.C. BOARD | |
| 5. INDUSTRIAL WASTE DISPOSAL | |
| 6. PERFORMANCE | |
| 7. INSIDE STRUCTURE AND MATERIAL | |
| 8. PACKAGING | |
| 9. RECOMMENDATION | |
| 10. SOLDERING CONDITION | |

<EXPLANATORY NOTE>

When the mistrust in the spec arises, this specification is given priority. And it will be confirmed by written spec change after conference of both posts involved.

This specification warrants the quality of the ceramic chip capacitor. Capacitors should be evaluated or confirmed a state of mounted on your product.

If the use of the capacitors goes beyond the bounds of this specification, we can not afford to guarantee.

Division	Date	SPEC. No.
Ceramic Capacitors Business Group	Jun, 2019	A-ISOFT-c

1. CODE CONSTRUCTION

(Example) $\frac{CN}{(1)}$ $\frac{A}{(2)}$ $\frac{6}{(3)}$ $\frac{P}{(4)}$ $\frac{1}{(5)}$ $\frac{X7R}{(6)}$ $\frac{1 H}{(7)}$ $\frac{106}{(8)}$ $\frac{K}{(9)}$ $\frac{T}{(10)}$ $\frac{***A}{(11)}$

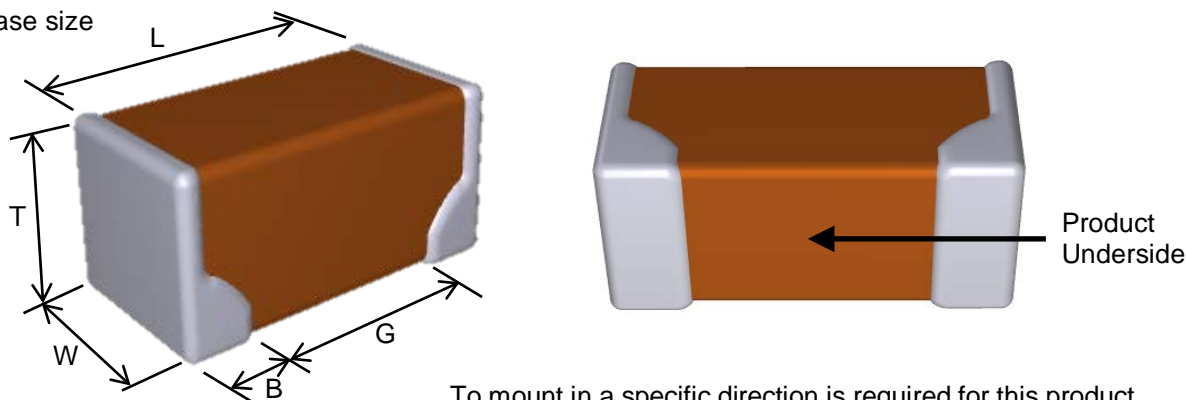
(1) Series

Symbol	Series
CN	Soft Termination CN series

(2) Application

Symbol	Application
A	For automotive application

(3) Case size



To mount in a specific direction is required for this product. Please mount products underside on a substrate.

Case size Symbol	Type (EIA style)	Dimensions (Unit : mm)				
		L	W	T	B	G
5	CNA5 (CC1206)	3.20±0.20	1.60±0.20	1.60±0.20	0.30 min.	1.00 min.
6	CNA6 (CC1210)	3.20±0.30	2.50±0.20	2.50±0.20	0.50 min.	—
			2.50±0.30	2.50±0.30		

*As for each item, please refer to detail page on TDK Web.

(4) Thickness

Symbol	Dimension(mm)
L	1.60
P	2.50

(5) Voltage condition in the life test

* Details are shown in Table1 No.15 at 6.PERFORMANCE.

Symbol	Condition
1	Rated Voltage

(6) Temperature Characteristics

* Details are shown in Table 1 No.6 at 6.PERFORMANCE.

(7) Rated Voltage

Symbol	Rated Voltage
2 A	DC 100 V
1 N	DC 75 V
1 H	DC 50 V
1 C	DC 16 V

(8) Rated Capacitance

Stated in three digits and in units of pico farads (pF).
The first and Second digits identify the first and second significant figures of the capacitance, the third digit identifies the multiplier.

(Example)

Symbol	Rated Capacitance
106	10,000,000 pF

(9) Capacitance tolerance

Symbol	Tolerance
K	± 10 %
M	± 20 %

(10) Packaging

Symbol	Packaging
T	Taping

(11) TDK internal code

2. OPERATING TEMPERATURE RANGE

Min. operating Temperature	Max. operating Temperature	Reference Temperature
-55°C	125°C	25°C

3. STORING CONDITION AND TERM

Storing temperature	Storing humidity	Storing term
5~40°C	20~70%RH	Within 3 months upon receipt.

4. P.C. BOARD

When mounting on an aluminum substrate, CNA6[CC1210] type is more likely to be affected by heat stress from the substrate.

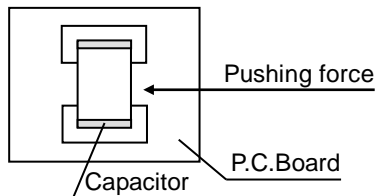
Please inquire separate specification when mounted on the substrate.

5. INDUSTRIAL WASTE DISPOSAL

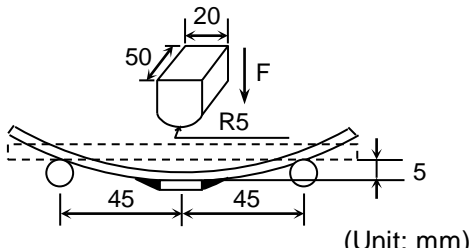

Dispose this product as industrial waste in accordance with the Industrial Waste Law.

6. PERFORMANCE

Table 1

No.	Item	Performance	Test or inspection method										
1	External Appearance	No defects, which may affect performance.	Inspect with magnifying glass (3x)										
2	Insulation Resistance	500MΩ·μF min. (As for the capacitors of rated voltage 16V DC, 100MΩ·μF min.)	Measuring voltage : Rated voltage Voltage application time : 60s.										
3	Voltage Proof	Withstand test voltage without insulation breakdown or other damage.	Apply voltage : 2.5 × rated voltage Voltage application time : 1s. Charge / discharge current : 50mA or lower										
4	Capacitance	Within the specified tolerance.	<table border="1"> <thead> <tr> <th>Capacitance</th> <th>Measuring frequency</th> <th>Measuring voltage</th> </tr> </thead> <tbody> <tr> <td>10uF and under</td> <td>1kHz±10%</td> <td>1.0±0.2Vrms</td> </tr> <tr> <td>Over 10uF</td> <td>120Hz±20%</td> <td>0.5±0.2Vrms.</td> </tr> </tbody> </table>	Capacitance	Measuring frequency	Measuring voltage	10uF and under	1kHz±10%	1.0±0.2Vrms	Over 10uF	120Hz±20%	0.5±0.2Vrms.	
Capacitance	Measuring frequency	Measuring voltage											
10uF and under	1kHz±10%	1.0±0.2Vrms											
Over 10uF	120Hz±20%	0.5±0.2Vrms.											
5	Dissipation Factor	Please refer to detail page on TDK Web.	See No.4 in this table for measuring condition.										
6	Temperature Characteristics of Capacitance	<p style="text-align: center;">Capacitance Change (%)</p> <hr/> <p style="text-align: center;">No voltage applied</p> <hr/> <p style="text-align: center;">X7R: ± 15</p> <hr/>	<p>Capacitance shall be measured by the steps shown in the following table, after thermal equilibrium is obtained for each step.</p> <p>ΔC be calculated ref. STEP3 reading.</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25 ± 2</td> </tr> <tr> <td>2</td> <td>-55 ± 2</td> </tr> <tr> <td>3</td> <td>25 ± 2</td> </tr> <tr> <td>4</td> <td>125 ± 2</td> </tr> </tbody> </table> <p>As for measuring voltage, please contact with our sales representative.</p>	Step	Temperature (°C)	1	25 ± 2	2	-55 ± 2	3	25 ± 2	4	125 ± 2
Step	Temperature (°C)												
1	25 ± 2												
2	-55 ± 2												
3	25 ± 2												
4	125 ± 2												
7	Robustness of Terminations	No sign of termination coming off, breakage of ceramic, or other abnormal signs.	<p>Reflow solder the capacitors on a P.C.Board shown in Appendix 2.</p> <p>Apply a pushing force gradually at the center of a specimen in a horizontal direction of P.C.board.</p> <p>Pushing force : 17.7N</p> <p>Holding time : 10±1s.</p> 										

(continued)

No.	Item	Performance	Test or inspection method	
8	Bending	No crack in the ceramic body.	Reflow solder the capacitor on a P.C.Board shown in Appendix 1. 	
9	Solderability	New solder to cover over 75% of termination. 25% may have pinholes or rough spots but not concentrated in one spot. Ceramic surface of A sections shall not be exposed due to melting or shifting of termination material. 	Solder : Sn-3.0Ag-0.5Cu or Sn-37Pb Flux : Isopropyl alcohol (JIS K 8839) Rosin (JIS K 5902) 25% solid solution. Solder temp. : 245±5°C (Sn-3.0Ag-0.5Cu) 235±5°C (Sn-37Pb) Dwell time : 3±0.3s.(Sn-3.0Ag-0.5Cu) 2±0.2s.(Sn-37Pb) Solder position : Until both terminations are completely soaked.	
10	Resistance to solder heat	External appearance	Solder : Sn-3.0Ag-0.5Cu or Sn-37Pb Flux : Isopropyl alcohol (JIS K 8839) Rosin (JIS K 5902) 25% solid solution.	
		Capacitance	Solder temp. : 260±5°C Dwell time : 10±1s.	
		D.F.	Meet the initial spec.	Solder position : Until both terminations are completely soaked.
		Insulation resistance	Meet the initial spec.	Pre-heating : Temp. — 110~140°C Time — 30~60s.
		Voltage proof	No insulation breakdown or other damage.	Leaving time : 24±2h

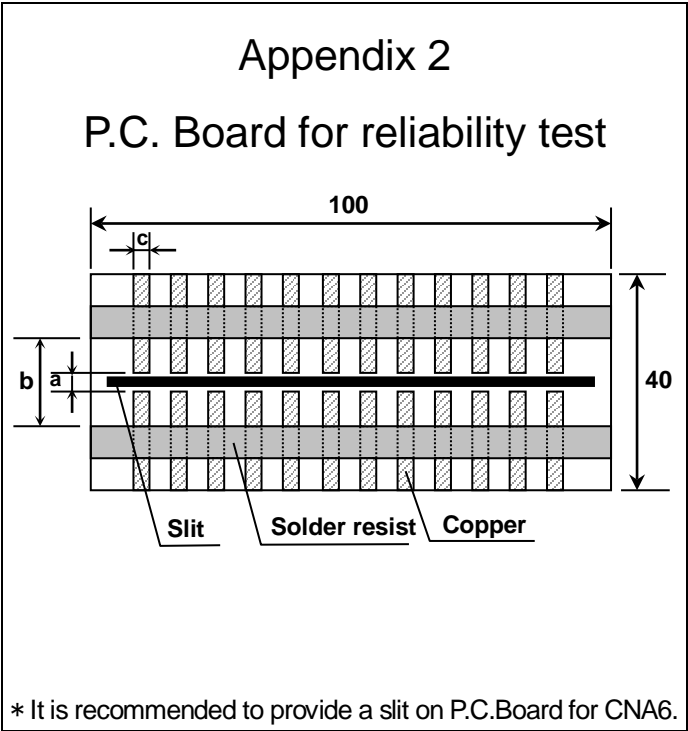
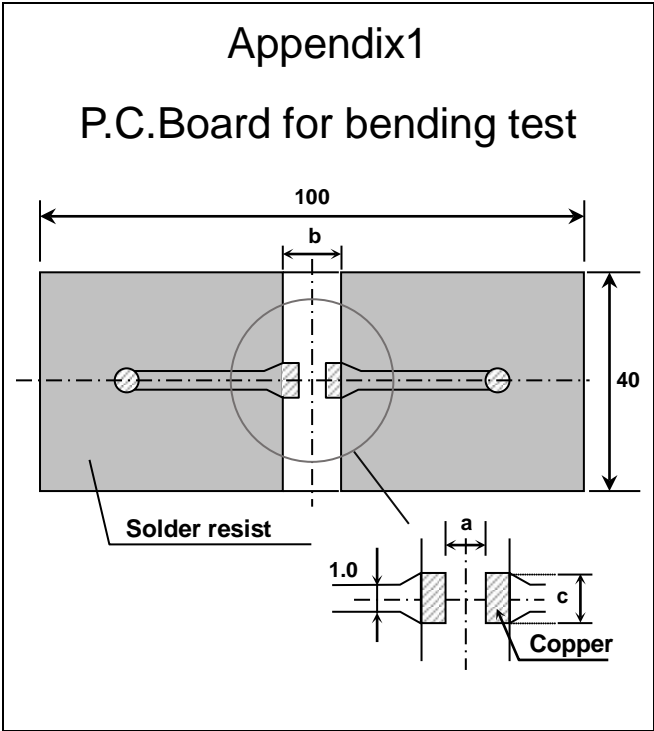
(continued)

No.	Item	Performance	Test or inspection method															
11	Vibration	External appearance	Applied force : 5G max. Frequency : 10~2,000Hz Reciprocating sweep time : 20 min. Cycle : 12 cycles in each 3 mutually perpendicular directions. Reflow solder the capacitors on a P.C.Board shown in Appendix 2 before testing.															
		Capacitance		<table border="1"> <thead> <tr> <th>Characteristics</th> <th>Change from the value before test</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>± 7.5 %</td> </tr> </tbody> </table>	Characteristics	Change from the value before test	X7R	± 7.5 %										
		Characteristics		Change from the value before test														
X7R	± 7.5 %																	
D.F.	Meet the initial spec.																	
12	Temperature cycle	External appearance	Expose the capacitors in the condition step1 through step 4 listed in the following table. Temp. cycle : 1,000 cycles <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55 ± 3</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Reference temp.</td> <td>2 ~ 5</td> </tr> <tr> <td>3</td> <td>125 ± 2</td> <td>30 ± 2</td> </tr> <tr> <td>4</td> <td>Reference temp.</td> <td>2 ~ 5</td> </tr> </tbody> </table> Leaving time : 24±2h Reflow solder the capacitors on a P.C.Board shown in Appendix 2 before testing.	Step	Temperature (°C)	Time (min.)	1	-55 ± 3	30 ± 3	2	Reference temp.	2 ~ 5	3	125 ± 2	30 ± 2	4	Reference temp.	2 ~ 5
		Step		Temperature (°C)	Time (min.)													
		1		-55 ± 3	30 ± 3													
		2		Reference temp.	2 ~ 5													
		3		125 ± 2	30 ± 2													
		4		Reference temp.	2 ~ 5													
Capacitance	<table border="1"> <thead> <tr> <th>Characteristics</th> <th>Change from the value before test</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>Please contact with our sales representative.</td> </tr> </tbody> </table>	Characteristics	Change from the value before test	X7R	Please contact with our sales representative.													
Characteristics	Change from the value before test																	
X7R	Please contact with our sales representative.																	
D.F.	Meet the initial spec.																	
Insulation resistance	Meet the initial spec.																	
Voltage proof	No insulation breakdown or other damage.																	
13	Moisture Resistance (Steady State)	External appearance	Test temp. : 40±2°C Test humidity : 90~95%RH Test time : 500 +24,0h Leaving time : 24±2h Reflow solder the capacitors on a P.C.Board shown in Appendix2 before testing.															
		Capacitance		<table border="1"> <thead> <tr> <th>Characteristics</th> <th>Change from the value before test</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>Please contact with our sales representative.</td> </tr> </tbody> </table>	Characteristics	Change from the value before test	X7R	Please contact with our sales representative.										
		Characteristics		Change from the value before test														
		X7R		Please contact with our sales representative.														
D.F.	200% of Initial spec max.																	
Insulation resistance	50MΩ·μF min. (As for the capacitors of rated voltage 16V DC, 10MΩ·μF min.)																	

(continued)

No.	Item		Performance	Test or inspection method	
14	Moisture Resistance	External appearance	No mechanical damage.	Test temp. : 85±2°C Test humidity : 85%RH Applied voltage : Rated voltage Test time : 1,000 +48,0h Charge/discharge current : 50mA or lower Leaving time : 24±2h Reflow solder the capacitors on a P.C.Board shown in Appendix2 before testing. Initial value setting Voltage conditioning 《After voltage treat the capacitors under testing temperature and voltage for 1 hour,》 leave the capacitors in ambient condition for 24±2h before measurement. Use this measurement for initial value.	
		Capacitance	Characteristics		Change from the value before test
			X7R		Please contact with our sales representative.
		D.F.	200% of Initial spec max.		
Insulation resistance	25MΩ·μF min. (As for the capacitors of rated voltage 16V DC, 5MΩ·μF min.)				
15	Life	External appearance	No mechanical damage.	Test temp. : 125 ±2°C Applied voltage : Rated voltage Test time : 1,000 +48,0h Charge/discharge current : 50mA or lower Leaving time : 24±2h Reflow solder the capacitors on a P.C.Board shown in Appendix2 before testing. Initial value setting Voltage conditioning 《After voltage treat the capacitors under testing temperature and voltage for 1 hour,》 leave the capacitors in ambient condition for 24±2h before measurement. Use this measurement for initial value.	
		Capacitance	Characteristics		Change from the value before test
			X7R		Please contact with our sales representative.
		D.F.	200% of Initial spec max.		
Insulation resistance	50MΩ·μF min. (As for the capacitors of rated voltage 16V DC, 10MΩ·μF min.)				

*As for the initial measurement of capacitors on number 6,10,11,12 and 13 leave capacitors at 150 0,-10°C for 1h and measure the value after leaving capacitors for 24 ± 2h in ambient condition.



(Unit : mm)

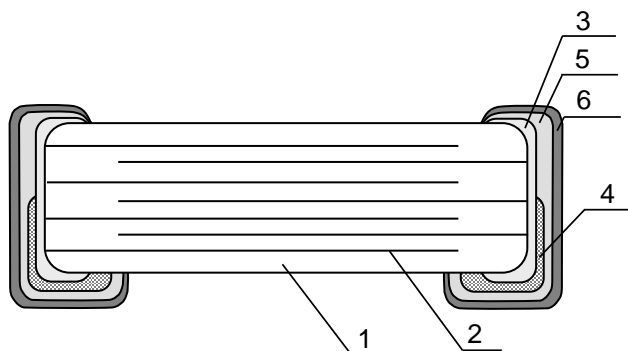
Case size	Dimensions		
TDK(EIA style)	a	b	c
CNA5 (CC1206)	2.2	5.0	2.0
CNA6 (CC1210)	2.2	5.0	2.9

1. Material : Glass Epoxy(As per JIS C6484 GE4)

2. Thickness : 1.6mm

- Copper(Thickness:0.035mm)
- Solder resist

7. INSIDE STRUCTURE AND MATERIAL



No.	NAME	MATERIAL
1	Dielectric	BaTiO ₃
2	Electrode	Nickel (Ni)
3	Termination	Copper (Cu)
4		Conductive resin (Filler : Ag)
5		Nickel (Ni)
6		Tin (Sn)

8. PACKAGING

Packaging shall be done to protect the components from the damage during transportation and storing, and a label which has the following information shall be attached.

Tape packaging is as per 12. TAPE PACKAGING SPECIFICATION.

- 1) Inspection No.
- 2) TDK P/N
- 3) Customer's P/N
- 4) Quantity

*Composition of Inspection No.

Example F 8 A - 23 - 001
 (a) (b) (c) (d) (e)

- (a) Line code
- (b) Last digit of the year
- (c) Month and A for January and B for February and so on. (Skip I)
- (d) Inspection Date of the month.
- (e) Serial No. of the day

*Composition of new Inspection No.

(Will be implemented on and after May 1, 2019)

Example I F 9 E 23 A0 01
 (a) (b) (c) (d) (e) (f) (g)

- (a) Prefix
- (b) Line code
- (c) Last digit of the year
- (d) Month and A for January and B for February and so on. (Skip I)
- (e) Inspection Date of the month.
- (f) Serial No. of the day(00 ~ ZZ)
- (g) Suffix(00 ~ ZZ)

* It is planned to shift to the new inspection No. on and after May 2019, but the implementation timing may be different depending on shipment bases.

Until the shift is completed, either current or new composition of inspection No. will be applied.

9. RECOMMENDATION

As for CNA6 [CC1210], It is recommended to provide a slit (about 1mm wide) in the board under the components to improve washing Flux. And please make sure to dry detergent up completely before.

10. SOLDERING CONDITION

















Reflow soldering only.


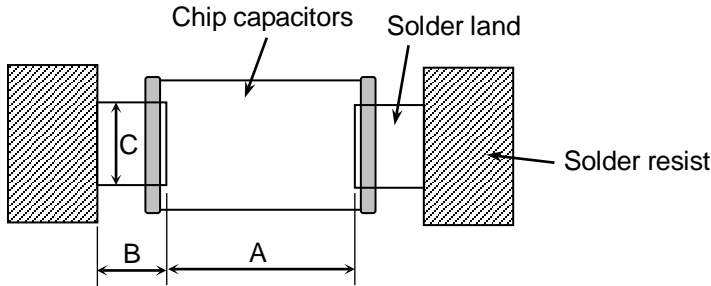
11. CAUTION FOR SOFT TERMINATION PRODUCTS

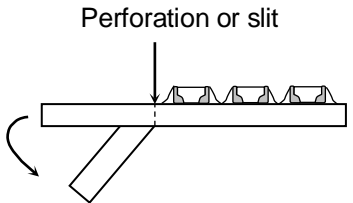
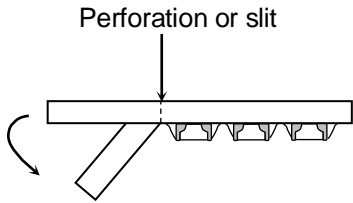
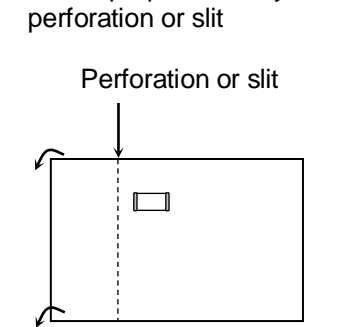
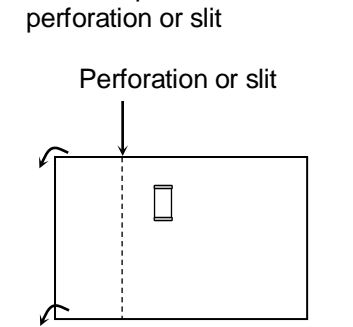
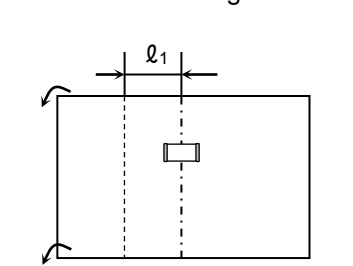
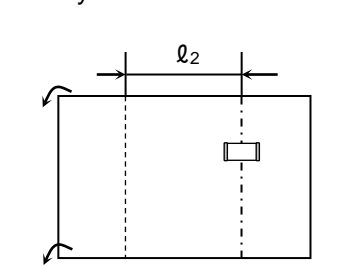
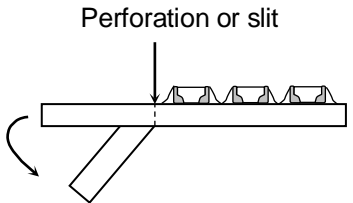
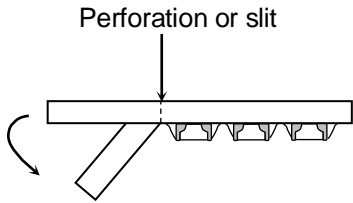
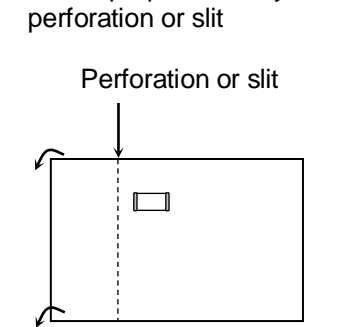
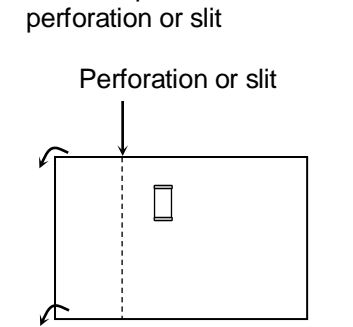
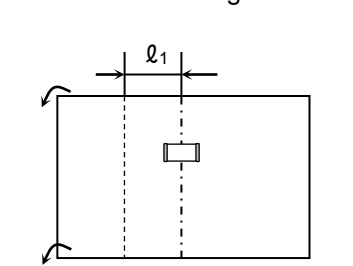
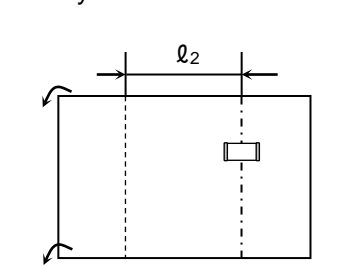
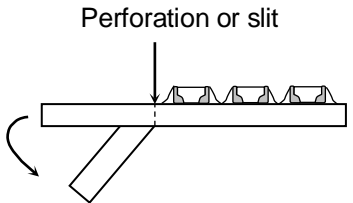
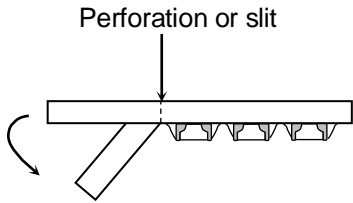
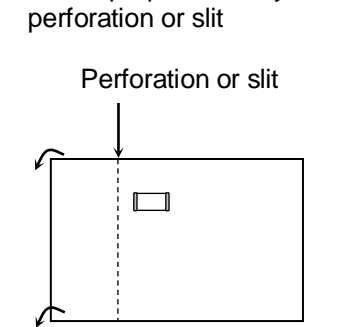
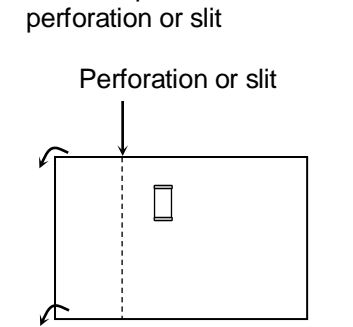
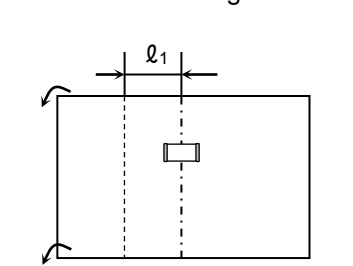
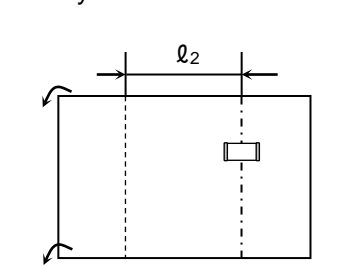
This product contains Ag (Silver) at the middle layer of terminal electrodes.

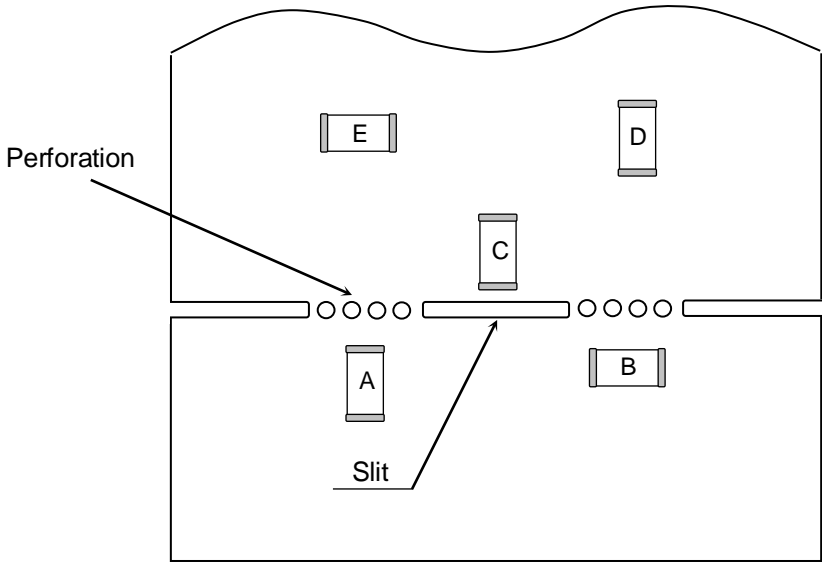


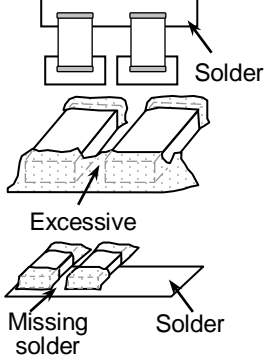





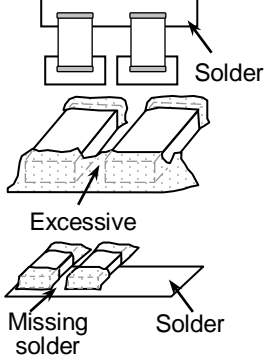





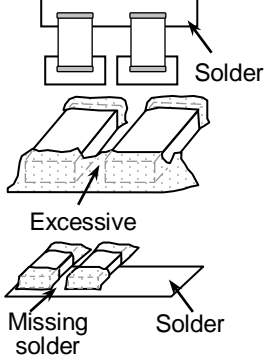



To avoid electromigration of Ag under high temperature and humidity, and failures caused by corrosive gas, chip capacitors on P.C. boards should be protected by moisture proof-sealing.













12. Caution

No.	Process	Condition																
1	Operating Condition (Storage, Use, Transportation)	<p>1-1. Storage, Use</p> <ol style="list-style-type: none"> 1) The capacitors must be stored in an ambient temperature of 5 to 40°C with a relative humidity of 20 to 70%RH. The products should be used within 3 months upon receipt. 2) The capacitors must be operated and stored in an environment free of dew condensation and these gases such as Hydrogen Sulphide, Hydrogen Sulphate, Chlorine, Ammonia and sulfur. 3) Avoid storing in sun light and falling of dew. 4) Do not use capacitors under high humidity and high and low atmospheric pressure which may affect capacitors reliability. 5) Capacitors should be tested for the solderability when they are stored for long time. <p>1-2. Handling in transportation In case of the transportation of the capacitors, the performance of the capacitors may be deteriorated depending on the transportation condition. (Refer to JEITA RCR-2335C 9.2 Handling in transportation)</p>																
2	Circuit design  Caution	<p>2-1. Operating temperature Operating temperature should be followed strictly within this specification, especially be careful with maximum temperature.</p> <ol style="list-style-type: none"> 1) Do not use capacitors above the maximum allowable operating temperature. 2) Surface temperature including self heating should be below maximum operating temperature. (Due to dielectric loss, capacitors will heat itself when AC is applied. Especially at high frequencies around its SRF, the heat might be so extreme that it may damage itself or the product mounted on. Please design the circuit so that the maximum temperature of the capacitors including the self heating to be below the maximum allowable operating temperature. Temperature rise at capacitor surface shall be below 20°C) 3) The electrical characteristics of the capacitors will vary depending on the temperature. The capacitors should be selected and designed in taking the temperature into consideration. <p>2-2. Operating voltage</p> <ol style="list-style-type: none"> 1) Operating voltage across the terminals should be below the rated voltage. When AC and DC are super imposed, V_{0-P} must be below the rated voltage. — (1) and (2) <p>AC or pulse with overshooting, V_{P-P} must be below the rated voltage. — (3), (4) and (5)</p> <p>When the voltage is started to apply to the circuit or it is stopped applying, the irregular voltage may be generated for a transit period because of resonance or switching. Be sure to use the capacitors within rated voltage containing these Irregular voltage.</p> <table border="1" data-bbox="475 1503 1444 2056"> <thead> <tr> <th data-bbox="475 1503 662 1541">Voltage</th> <th data-bbox="662 1503 922 1541">(1) DC voltage</th> <th data-bbox="922 1503 1182 1541">(2) DC+AC voltage</th> <th data-bbox="1182 1503 1444 1541">(3) AC voltage</th> </tr> </thead> <tbody> <tr> <td data-bbox="475 1541 662 1765"> Positional Measurement (Rated voltage) </td> <td data-bbox="662 1541 922 1765">  </td> <td data-bbox="922 1541 1182 1765">  </td> <td data-bbox="1182 1541 1444 1765">  </td> </tr> <tr> <th data-bbox="475 1794 662 1832">Voltage</th> <th data-bbox="662 1794 922 1832">(4) Pulse voltage (A)</th> <th data-bbox="922 1794 1182 1832">(5) Pulse voltage (B)</th> <th></th> </tr> <tr> <td data-bbox="475 1832 662 2056"> Positional Measurement (Rated voltage) </td> <td data-bbox="662 1832 922 2056">  </td> <td data-bbox="922 1832 1182 2056">  </td> <td></td> </tr> </tbody> </table>	Voltage	(1) DC voltage	(2) DC+AC voltage	(3) AC voltage	Positional Measurement (Rated voltage)				Voltage	(4) Pulse voltage (A)	(5) Pulse voltage (B)		Positional Measurement (Rated voltage)			
Voltage	(1) DC voltage	(2) DC+AC voltage	(3) AC voltage															
Positional Measurement (Rated voltage)																		
Voltage	(4) Pulse voltage (A)	(5) Pulse voltage (B)																
Positional Measurement (Rated voltage)																		




No.	Process	Condition												
2	Circuit design  Caution	2) Even below the rated voltage, if repetitive high frequency AC or pulse is applied, the reliability of the capacitors may be reduced. 3) The effective capacitance will vary depending on applied DC and AC voltages. The capacitors should be selected and designed in taking the voltages into consideration. 2-3. Frequency When the capacitors (Class 2) are used in AC and/or pulse voltages, the capacitors may vibrate themselves and generate audible sound.												
3	Designing P.C.board	<p>The amount of solder at the terminations has a direct effect on the reliability of the capacitors.</p> <ol style="list-style-type: none"> 1) The greater the amount of solder, the higher the stress on the chip capacitors, and the more likely that it will break. When designing a P.C.board, determine the shape and size of the solder lands to have proper amount of solder on the terminations. 2) Avoid using common solder land for multiple terminations and provide individual solder land for each terminations. 3) Size and recommended land dimensions. <div style="text-align: center;">  </div> <p style="text-align: center;">Reflow soldering (mm)</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th style="text-align: center;">Case size Symbol</th> <th style="text-align: center;">CNA5 (CC1206)</th> <th style="text-align: center;">CNA6 (CC1210)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">2.0 ~ 2.4</td> <td style="text-align: center;">2.0 ~ 2.4</td> </tr> <tr> <td style="text-align: center;">B</td> <td style="text-align: center;">1.0 ~ 1.2</td> <td style="text-align: center;">1.0 ~ 1.2</td> </tr> <tr> <td style="text-align: center;">C</td> <td style="text-align: center;">1.1 ~ 1.6</td> <td style="text-align: center;">1.9 ~ 2.5</td> </tr> </tbody> </table>	Case size Symbol	CNA5 (CC1206)	CNA6 (CC1210)	A	2.0 ~ 2.4	2.0 ~ 2.4	B	1.0 ~ 1.2	1.0 ~ 1.2	C	1.1 ~ 1.6	1.9 ~ 2.5
Case size Symbol	CNA5 (CC1206)	CNA6 (CC1210)												
A	2.0 ~ 2.4	2.0 ~ 2.4												
B	1.0 ~ 1.2	1.0 ~ 1.2												
C	1.1 ~ 1.6	1.9 ~ 2.5												

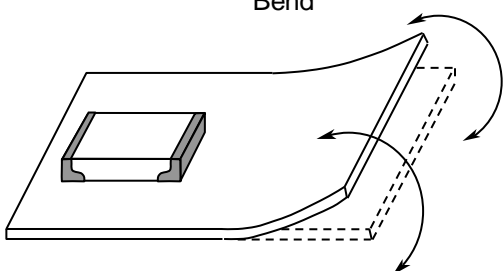
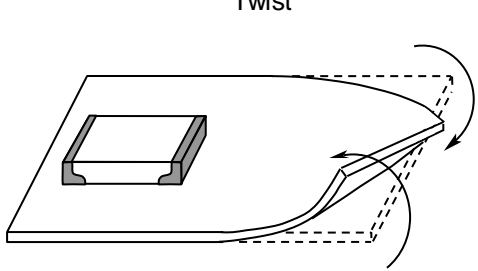
No.	Process	Condition												
3	Designing P.C.board	<p>4) Recommended chip capacitors layout is as following.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th data-bbox="466 224 651 315"></th> <th data-bbox="651 224 1037 315">Disadvantage against bending stress</th> <th data-bbox="1037 224 1423 315">Advantage against bending stress</th> </tr> </thead> <tbody> <tr> <td data-bbox="466 315 651 654">Mounting face</td> <td data-bbox="651 315 1037 654"> <p style="text-align: center;">Perforation or slit</p>  <p style="text-align: center;">Break P.C.board with mounted side up.</p> </td> <td data-bbox="1037 315 1423 654"> <p style="text-align: center;">Perforation or slit</p>  <p style="text-align: center;">Break P.C.board with mounted side down.</p> </td> </tr> <tr> <td data-bbox="466 654 651 1050">Chip arrangement (Direction)</td> <td data-bbox="651 654 1037 1050"> <p style="text-align: center;">Perforation or slit</p>  </td> <td data-bbox="1037 654 1423 1050"> <p style="text-align: center;">Perforation or slit</p>  </td> </tr> <tr> <td data-bbox="466 1050 651 1429">Distance from slit</td> <td data-bbox="651 1050 1037 1429"> <p style="text-align: center;">Closer to slit is higher stress</p>  <p style="text-align: center;">$(l_1 < l_2)$</p> </td> <td data-bbox="1037 1050 1423 1429"> <p style="text-align: center;">Away from slit is less stress</p>  <p style="text-align: center;">$(l_1 < l_2)$</p> </td> </tr> </tbody> </table>		Disadvantage against bending stress	Advantage against bending stress	Mounting face	<p style="text-align: center;">Perforation or slit</p>  <p style="text-align: center;">Break P.C.board with mounted side up.</p>	<p style="text-align: center;">Perforation or slit</p>  <p style="text-align: center;">Break P.C.board with mounted side down.</p>	Chip arrangement (Direction)	<p style="text-align: center;">Perforation or slit</p> 	<p style="text-align: center;">Perforation or slit</p> 	Distance from slit	<p style="text-align: center;">Closer to slit is higher stress</p>  <p style="text-align: center;">$(l_1 < l_2)$</p>	<p style="text-align: center;">Away from slit is less stress</p>  <p style="text-align: center;">$(l_1 < l_2)$</p>
	Disadvantage against bending stress	Advantage against bending stress												
Mounting face	<p style="text-align: center;">Perforation or slit</p>  <p style="text-align: center;">Break P.C.board with mounted side up.</p>	<p style="text-align: center;">Perforation or slit</p>  <p style="text-align: center;">Break P.C.board with mounted side down.</p>												
Chip arrangement (Direction)	<p style="text-align: center;">Perforation or slit</p> 	<p style="text-align: center;">Perforation or slit</p> 												
Distance from slit	<p style="text-align: center;">Closer to slit is higher stress</p>  <p style="text-align: center;">$(l_1 < l_2)$</p>	<p style="text-align: center;">Away from slit is less stress</p>  <p style="text-align: center;">$(l_1 < l_2)$</p>												





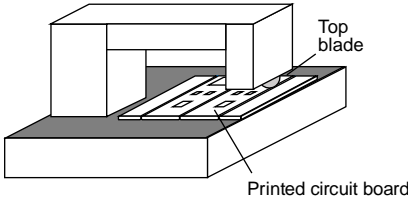
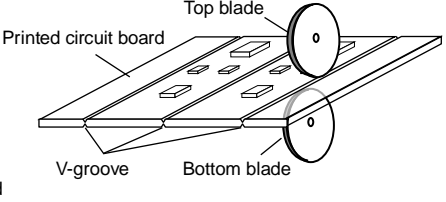

















No.	Process	Condition												
3	Designing P.C.board	<p>5) Mechanical stress varies according to location of chip capacitors on the P.C.board.</p>  <p>The stress in capacitors is in the following order. $A > B = C > D > E$</p> <p>6) Layout recommendation</p> <table border="1" data-bbox="379 981 1481 1899"> <thead> <tr> <th data-bbox="379 981 539 1099">Example</th> <th data-bbox="539 981 847 1099">Use of common solder land</th> <th data-bbox="847 981 1155 1099">Soldering with chassis</th> <th data-bbox="1155 981 1481 1099">Use of common solder land with other SMD</th> </tr> </thead> <tbody> <tr> <td data-bbox="379 1099 539 1480">Need to avoid</td> <td data-bbox="539 1099 847 1480">  </td> <td data-bbox="847 1099 1155 1480">  </td> <td data-bbox="1155 1099 1481 1480">  </td> </tr> <tr> <td data-bbox="379 1480 539 1899">Recommen Solder land - dation</td> <td data-bbox="539 1480 847 1899">  </td> <td data-bbox="847 1480 1155 1899">  </td> <td data-bbox="1155 1480 1481 1899">  </td> </tr> </tbody> </table>	Example	Use of common solder land	Soldering with chassis	Use of common solder land with other SMD	Need to avoid				Recommen Solder land - dation			
Example	Use of common solder land	Soldering with chassis	Use of common solder land with other SMD											
Need to avoid														
Recommen Solder land - dation														


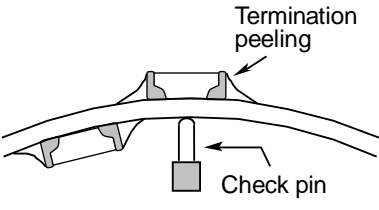
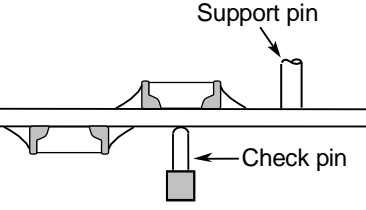
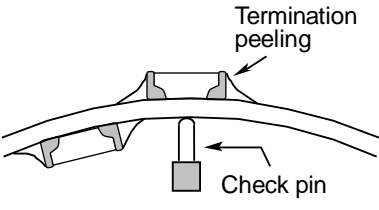
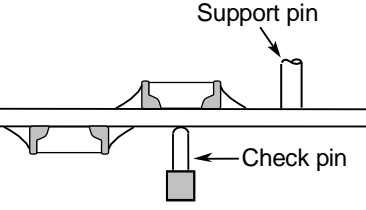
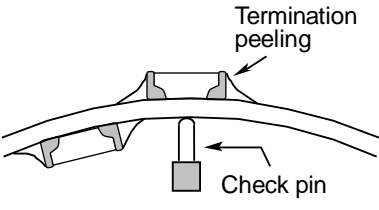
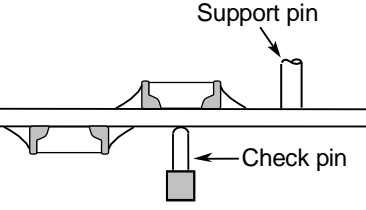
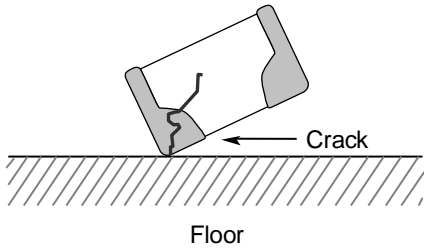
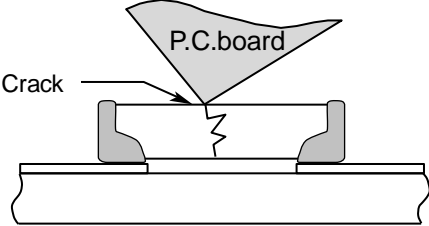
No.	Process	Condition									
4	Mounting	<p>4-1. Stress from mounting head If the mounting head is adjusted too low, it may induce excessive stress in the chip capacitors to result in cracking. Please take following precautions.</p> <ol style="list-style-type: none"> 1) Adjust the bottom dead center of the mounting head to reach on the P.C.board surface and not press it. 2) Adjust the mounting head pressure to be 1 to 3N of static weight. 3) To minimize the impact energy from mounting head, it is important to provide support from the bottom side of the P.C.board. See following examples. <table border="1" data-bbox="481 595 1434 1167"> <thead> <tr> <th data-bbox="481 595 663 645"></th> <th data-bbox="663 595 1061 645">Not recommended</th> <th data-bbox="1061 595 1434 645">Recommended</th> </tr> </thead> <tbody> <tr> <td data-bbox="481 645 663 904">Single sided mounting</td> <td data-bbox="663 645 1061 904">  <p>Crack</p> </td> <td data-bbox="1061 645 1434 904">  <p>Support pin</p> </td> </tr> <tr> <td data-bbox="481 904 663 1167">Double-sides mounting</td> <td data-bbox="663 904 1061 1167">  <p>Solder peeling Crack</p> </td> <td data-bbox="1061 904 1434 1167">  <p>Support pin</p> </td> </tr> </tbody> </table> <p>When the centering jaw is worn out, it may give mechanical impact on the capacitors to cause crack. Please control the close up dimension of the centering jaw and provide sufficient preventive maintenance and replacement of it.</p>		Not recommended	Recommended	Single sided mounting	 <p>Crack</p>	 <p>Support pin</p>	Double-sides mounting	 <p>Solder peeling Crack</p>	 <p>Support pin</p>
	Not recommended	Recommended									
Single sided mounting	 <p>Crack</p>	 <p>Support pin</p>									
Double-sides mounting	 <p>Solder peeling Crack</p>	 <p>Support pin</p>									


No.	Process	Condition											
5	Soldering	<p>5-1. Flux selection</p> <p>Flux can seriously affect the performance of capacitors. Confirm the following to select the appropriate flux.</p> <ol style="list-style-type: none"> 1) It is recommended to use a mildly activated rosin flux (less than 0.1wt% chlorine). Strong flux is not recommended. 2) Excessive flux must be avoided. Please provide proper amount of flux. 3) When water-soluble flux is used, enough washing is necessary. <p>5-2. Recommended soldering profile by various methods</p> <div style="text-align: center;"> <p>Reflow soldering</p> </div> <p>5-3. Recommended soldering peak temp and peak temp duration</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2" style="text-align: center;">Temp./Duration</th> <th colspan="2" style="text-align: center;">Reflow soldering</th> </tr> <tr> <th style="text-align: center;">Peak temp(°C)</th> <th style="text-align: center;">Duration(sec.)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">Sn-Pb Solder</td> <td style="text-align: center;">230 max.</td> <td style="text-align: center;">20 max.</td> </tr> <tr> <td style="text-align: center;">Lead Free Solder</td> <td style="text-align: center;">260 max.</td> <td style="text-align: center;">10 max.</td> </tr> </tbody> </table> <p>Recommended solder compositions Lead Free Solder : Sn-3.0Ag-0.5Cu Sn-Pb solder : Sn-37Pb</p>	Temp./Duration	Reflow soldering		Peak temp(°C)	Duration(sec.)	Sn-Pb Solder	230 max.	20 max.	Lead Free Solder	260 max.	10 max.
Temp./Duration	Reflow soldering												
	Peak temp(°C)	Duration(sec.)											
Sn-Pb Solder	230 max.	20 max.											
Lead Free Solder	260 max.	10 max.											

No.	Process	Condition								
5	Soldering	<p>5-4. Avoiding thermal shock</p> <p>1) Preheating condition</p> <table border="1" data-bbox="539 277 1275 416"> <thead> <tr> <th data-bbox="539 277 767 322">Soldering</th> <th data-bbox="767 277 1010 322">Case size</th> <th data-bbox="1010 277 1275 322">Temp. (°C)</th> </tr> </thead> <tbody> <tr> <td data-bbox="539 322 767 367" rowspan="2">Reflow soldering</td> <td data-bbox="767 322 1010 367">CNA5(CC1206)</td> <td data-bbox="1010 322 1275 367">$\Delta T \leq 150$</td> </tr> <tr> <td data-bbox="767 367 1010 416">CNA6(CC1210)</td> <td data-bbox="1010 367 1275 416">$\Delta T \leq 130$</td> </tr> </tbody> </table> <p>2) Cooling condition Natural cooling using air is recommended. If the chips are dipped into a solvent for cleaning, the temperature difference (ΔT) must be less than 100°C.</p> <p>5-5. Amount of solder Excessive solder will induce higher tensile force in chip capacitors when temperature changes and it may result in chip cracking. In sufficient solder may detach the capacitors from the P.C.board.</p> <div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 30%;">Excessive solder</div> <div style="width: 30%; text-align: center;">  </div> <div style="width: 30%;">Higher tensile force in chip capacitors to cause crack</div> </div> <hr/> <div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 30%;">Adequate</div> <div style="width: 30%; text-align: center;">  </div> <div style="width: 30%;"></div> </div> <hr/> <div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 30%;">Insufficient solder</div> <div style="width: 30%; text-align: center;">  </div> <div style="width: 30%;">Low robustness may cause contact failure or chip capacitors come off the P.C.board.</div> </div> <hr/> <p>5-6. Sn-Zn solder Sn-Zn solder affects product reliability. Please contact TDK in advance when utilize Sn-Zn solder.</p> <p>5-7. Countermeasure for tombstone The misalignment between the mounted positions of the capacitors and the land patterns should be minimized. The tombstone phenomenon may occur especially the capacitors are mounted (in longitudinal direction) in the same direction of the reflow soldering. (Refer to JEITA RCR-2335C Annex A (Informative) Recommendations to prevent the tombstone phenomenon)</p>	Soldering	Case size	Temp. (°C)	Reflow soldering	CNA5(CC1206)	$\Delta T \leq 150$	CNA6(CC1210)	$\Delta T \leq 130$
Soldering	Case size	Temp. (°C)								
Reflow soldering	CNA5(CC1206)	$\Delta T \leq 150$								
	CNA6(CC1210)	$\Delta T \leq 130$								

No.	Process	Condition
6	Cleaning	<p>1) If an unsuitable cleaning fluid is used, flux residue or some foreign articles may stick to chip capacitors surface to deteriorate especially the insulation resistance.</p> <p>2) If cleaning condition is not suitable, it may damage the chip capacitors.</p> <p>2)-1. Insufficient washing</p> <p>(1) Terminal electrodes may corrode by Halogen in the flux.</p> <p>(2) Halogen in the flux may adhere on the surface of capacitors, and lower the insulation resistance.</p> <p>(3) Water soluble flux has higher tendency to have above mentioned problems (1) and (2).</p> <p>2)-2. Excessive washing When ultrasonic cleaning is used, excessively high ultrasonic energy output can affect the connection between the ceramic chip capacitor's body and the terminal electrode. To avoid this, following is the recommended condition.</p> <p style="padding-left: 40px;">Power : 20W/l max. Frequency : 40kHz max. Washing time : 5 minutes max.</p> <p>2)-3. If the cleaning fluid is contaminated, density of Halogen increases, and it may bring the same result as insufficient cleaning.</p>
7	Coating and molding of the P.C.board	<p>1) This product contains Ag (Silver) at the middle layer of terminal electrodes. To avoid electromigration of Ag under high temperature and humidity, and failures caused by corrosive gas, chip capacitors on P.C. boards should be protected by moisture proof-sealing.</p> <p>2) When the P.C.board is coated, please verify the quality influence on the product.</p> <p>3) Please verify carefully that there is no harmful decomposing or reaction gas emission during curing which may damage the chip capacitors.</p> <p>4) Please verify the curing temperature.</p>
8	<p>Handling after chip mounted</p> <p>⚠ Caution</p>	<p>1) Please pay attention not to bend or distort the P.C.board after soldering in handling otherwise the chip capacitors may crack.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>Bend</p>  </div> <div style="text-align: center;"> <p>Twist</p>  </div> </div>

No.	Process	Condition																
8	Handling after chip mounted  Caution	<p>2) Printed circuit board cropping should not be carried out by hand, but by using the proper tooling. Printed circuit board cropping should be carried out using a board cropping jig as shown in the following figure or a board cropping apparatus to prevent inducing mechanical stress on the board.</p> <p>(1) Example of a board cropping jig Recommended example: The board should be pushed from the back side, close to the cropping jig so that the board is not bent and the stress applied to the capacitor is compressive. Unrecommended example: If the pushing point is far from the cropping jig and the pushing direction is from the front side of the board, large tensile stress is applied to the capacitor, which may cause cracks.</p> <div style="display: flex; justify-content: space-around;"> <div data-bbox="459 593 758 873"> <p>Outline of jig</p>  </div> <div data-bbox="762 582 1444 846"> <table border="1"> <thead> <tr> <th data-bbox="762 582 1098 638">Recommended</th> <th data-bbox="1098 582 1444 638">Unrecommended</th> </tr> </thead> <tbody> <tr> <td data-bbox="762 638 1098 846">  </td> <td data-bbox="1098 638 1444 846">  </td> </tr> </tbody> </table> </div> </div> <p>(2) Example of a board cropping machine</p> <p>An outline of a printed circuit board cropping machine is shown below. The top and bottom blades are aligned with one another along the lines with the V-grooves on printed circuit board when cropping the board.</p> <p>Unrecommended example: Misalignment of blade position between top and bottom, right and left, or front and rear blades may cause a crack in the capacitor.</p> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div data-bbox="555 1176 965 1444"> <p>Outline of machine</p>  </div> <div data-bbox="965 1176 1412 1444"> <p>Principle of operation</p>  </div> </div> <div style="text-align: center; margin-top: 20px;"> <p>Cross-section diagram</p>  </div> <table border="1" style="width: 100%; text-align: center; margin-top: 20px;"> <thead> <tr> <th data-bbox="641 1662 821 1706">Recommended</th> <th colspan="3" data-bbox="821 1662 1353 1706">Unrecommended</th> </tr> <tr> <th data-bbox="641 1706 821 1787"></th> <th data-bbox="821 1706 997 1787">Top-bottom misalignment</th> <th data-bbox="997 1706 1173 1787">Left-right misalignment</th> <th data-bbox="1173 1706 1353 1787">Front-rear misalignment</th> </tr> </thead> <tbody> <tr> <td data-bbox="641 1787 821 2087">  </td> <td data-bbox="821 1787 997 2087">  </td> <td data-bbox="997 1787 1173 2087">  </td> <td data-bbox="1173 1787 1353 2087">  </td> </tr> </tbody> </table>	Recommended	Unrecommended			Recommended	Unrecommended				Top-bottom misalignment	Left-right misalignment	Front-rear misalignment				
Recommended	Unrecommended																	
																		
Recommended	Unrecommended																	
	Top-bottom misalignment	Left-right misalignment	Front-rear misalignment															
																		

No.	Process	Condition						
8	Handling after chip mounted  Caution	<p>3) When functional check of the P.C.board is performed, check pin pressure tends to be adjusted higher for fear of loose contact. But if the pressure is excessive and bend the P.C.board, it may crack the chip capacitors or peel the terminations off. Please adjust the check pins not to bend the P.C.board.</p> <table border="1" data-bbox="475 383 1433 685"> <thead> <tr> <th data-bbox="475 383 616 450">Item</th> <th data-bbox="616 383 1034 450">Not recommended</th> <th data-bbox="1034 383 1433 450">Recommended</th> </tr> </thead> <tbody> <tr> <td data-bbox="475 450 616 685">Board bending</td> <td data-bbox="616 450 1034 685">  </td> <td data-bbox="1034 450 1433 685">  </td> </tr> </tbody> </table>	Item	Not recommended	Recommended	Board bending		
Item	Not recommended	Recommended						
Board bending								
9	Handling of loose chip capacitors	<p>1) If dropped the chip capacitors may crack. Once dropped do not use it. Especially, the large case sized chip capacitors are tendency to have cracks easily, so please handle with care.</p>  <p style="text-align: center;">Floor</p> <p>2) Piling the P.C.board after mounting for storage or handling, the corner of the P.C. board may hit the chip capacitors of another board to cause crack.</p> 						
10	Capacitance aging	The capacitors (Class 2) have aging in the capacitance. They may not be used in precision time constant circuit. In case of the time constant circuit, the evaluation should be done well.						
11	Estimated life and estimated failure rate of capacitors	As per the estimated life and the estimated failure rate depend on the temperature and the voltage. This can be calculated by the equation described in JEITA RCR-2335C Annex F(Informative) Calculation of the estimated lifetime and the estimated failure rate (Voltage acceleration coefficient : 3 multiplication rule, Temperature acceleration coefficient : 10°C rule) The failure rate can be decreased by reducing the temperature and the voltage but they will not be guaranteed.						

No.	Process	Condition
12	Caution during operation of equipment	<p>1) A capacitor shall not be touched directly with bare hands during operation in order to avoid electric shock. Electric energy held by the capacitor may be discharged through the human body when touched with a bare hand. Even when the equipment is off, a capacitor may stay charged. The capacitor should be handled after being completely discharged using a resistor.</p> <p>2) The terminals of a capacitor shall not be short-circuited by any accidental contact with a conductive object. A capacitor shall not be exposed to a conductive liquid such as an acid or alkali solution. A conductive object or liquid, such as acid and alkali, between the terminals may lead to the breakdown of a capacitor due to short circuit</p> <p>3) Confirm that the environment to which the equipment will be exposed during transportation and operation meets the specified conditions. Do not to use the equipment in the following environments.</p> <p>(1) Environment where a capacitor is splattered with water or oil (2) Environment where a capacitor is exposed to direct sunlight (3) Environment where a capacitor is exposed to Ozone, ultraviolet rays or radiation (4) Environment where a capacitor exposed to corrosive gas(e.g. hydrogen sulfide, sulfur dioxide, chlorine. ammonia gas etc.) (5) Environment where a capacitor exposed to vibration or mechanical shock exceeding the specified limits. (6) Atmosphere change with causes condensation</p>
13	Others  Caution	<p>The product listed in this specification is intended for use in automotive applications under-normal operation and usage conditions.</p> <p>The product is not designed or warranted to meet the requirements of application listed below, whose performance and/or quality requires a more stringent level of safety or reliability, or whose failure, malfunction or defect could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in this specification, please contact us.</p> <p>(1) Aerospace/Aviation equipment (2) Transportation equipment (electric trains, ships etc.) (3) Medical equipment (Excepting Pharmaceutical Affairs Law classification Class1, 2) (4) Power-generation control equipment (5) Atomic energy-related equipment (6) Seabed equipment (7) Transportation control equipment (8) Public information-processing equipment (9) Military equipment (10) Electric heating apparatus, burning equipment (11) Disaster prevention/crime prevention equipment (12) Safety equipment (13) Other applications that are not considered general-purpose applications</p> <p>When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment. In addition, although the product listed in this specification is intended for use in automotive applications as described above, it is not prohibited to use for general electronic equipment, whose performance and/or quality doesn't require a more stringent level of safety or reliability, or whose failure, malfunction or defect could not cause serious damage to society, person or property. Therefore, the description of this caution will be applied, when the product is used in general electronic equipment under a normal operation and usage conditions.</p>

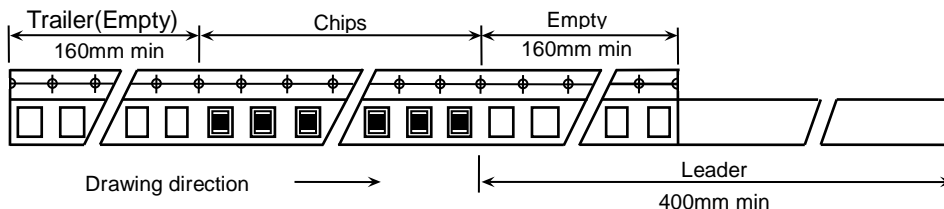
13. TAPE PACKAGING SPECIFICATION

1. CONSTRUCTION AND DIMENSION OF TAPING

1-1. Dimensions of carrier tape

Dimensions of plastic tape shall be according to Appendix 3.

1-2. Bulk part and leader of taping

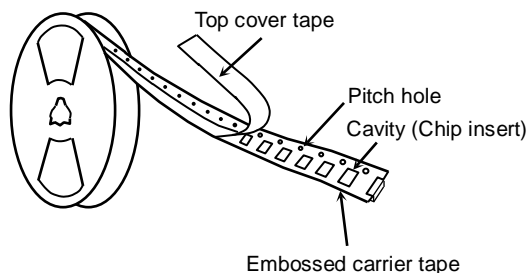


1-3. Dimensions of reel

Dimensions of Ø178 reel shall be according to Appendix 4, 5.

Dimensions of Ø330 reel shall be according to Appendix 6, 7.

1-4. Structure of taping



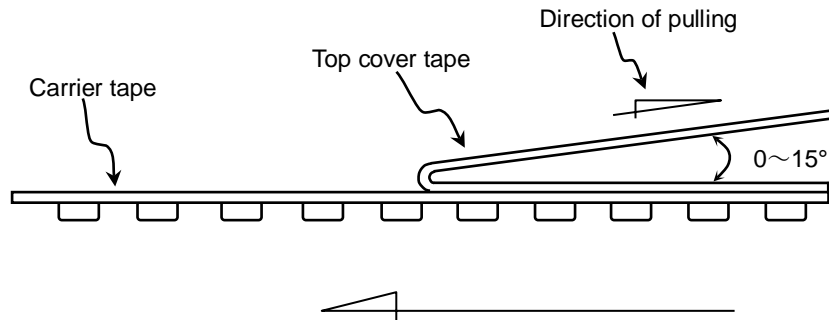
2. CHIP QUANTITY

Please refer to detail page on TDK Web.

3. PERFORMANCE SPECIFICATIONS

3-1. Fixing peeling strength (top cover tape)

$$0.05\text{N} < \text{Peeling strength} < 0.7\text{N}$$



3-2. Carrier tape shall be flexible enough to be wound around a minimum radius of 30mm with components in tape.

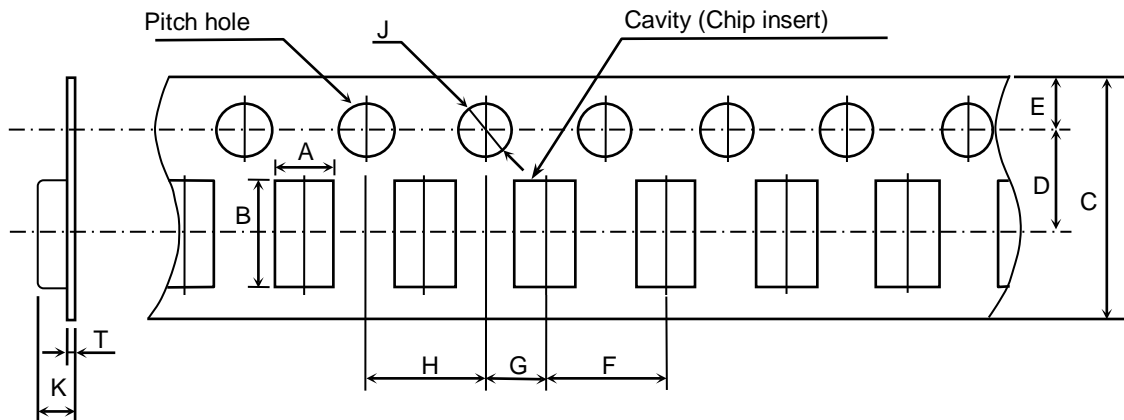
3-3. The missing of components shall be less than 0.1%

3-4. Components shall not stick to fixing tape.

3-5. When removing the cover tape, there shall not be difficulties by unfitting clearance gap, burrs and crushes of cavities. Also the sprocket holes shall not be covered by absorbing dust into the suction nozzle.

Appendix 3

Plastic Tape



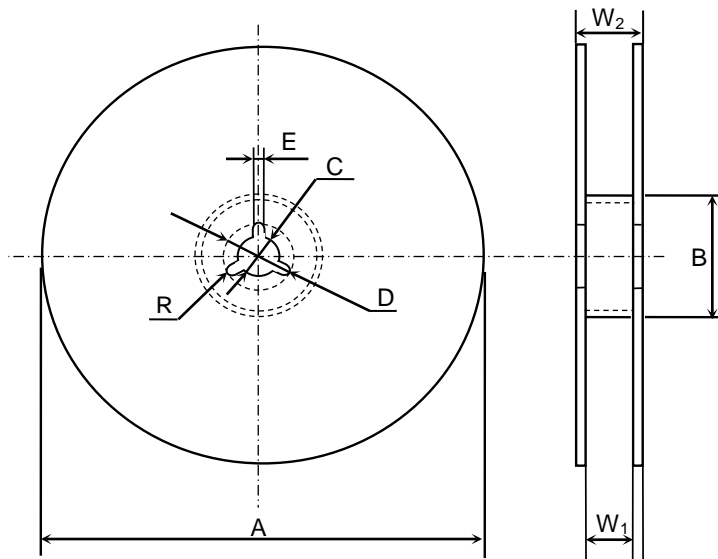
(Unit : mm)

Symbol	A	B	C	D	E	F
Case size						
CNA5 (CC1206)	(1.90)	(3.50)	8.00 ± 0.30	3.50 ± 0.05	1.75 ± 0.10	4.00 ± 0.10
CNA6 (CC1210)	(2.90)	(3.60)	8.00 ± 0.30 or 12.0 ± 0.30	3.50 ± 0.05 or 5.50 ± 0.05		
Symbol	G	H	J	K	T	
Case size						
CNA5 (CC1206)	2.00 ± 0.05	4.00 ± 0.10	∅ 1.50 ^{+0.10} ₀	2.50 max.	0.60 max.	
CNA6 (CC1210)				3.40 max.		

() Reference value.

Appendix 4

Dimensions of reel (Material : Polystyrene)
CNA5, CNA6(8mm width taping type)

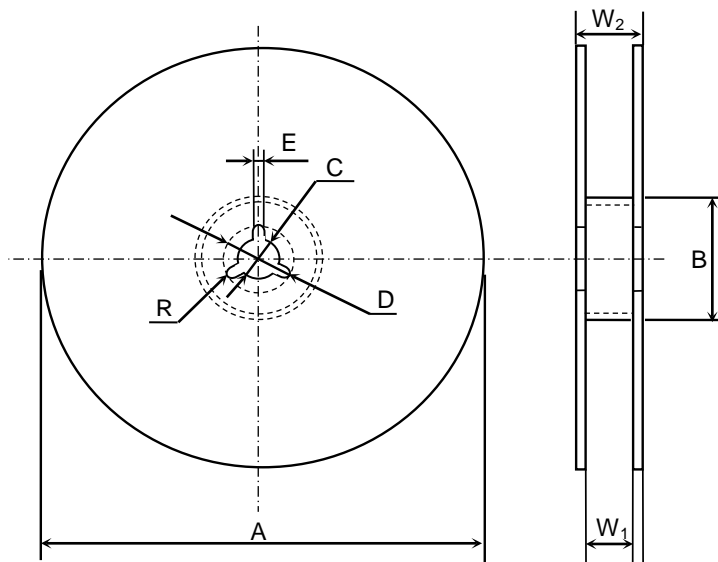


(Unit : mm)

Symbol	A	B	C	D	E	W ₁
Dimension	∅178 ± 2.0	∅60 ± 2.0	∅13 ± 0.5	∅21 ± 0.8	2.0 ± 0.5	9.0 ± 0.3
Symbol	W ₂	R				
Dimension	13.0 ± 1.4	1.0				

Appendix 5

Dimensions of reel (Material : Polystyrene)
CNA6(12mm width taping type)

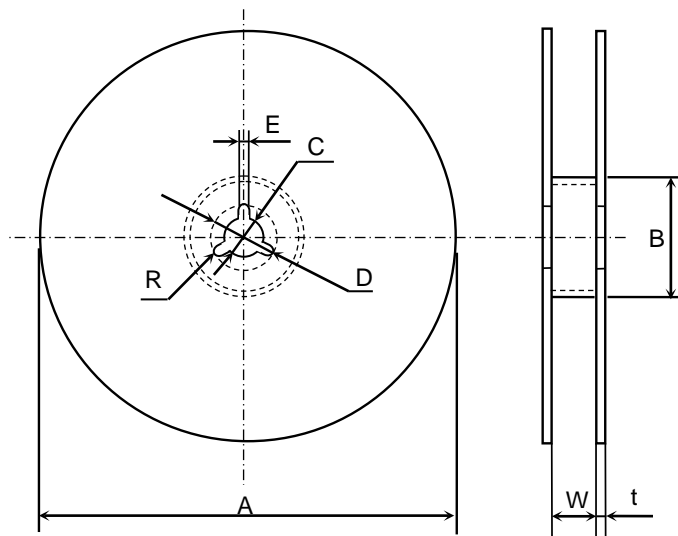


(Unit : mm)

Symbol	A	B	C	D	E	W ₁
Dimension	∅178 ± 2.0	∅60 ± 2.0	∅13 ± 0.5	∅21 ± 0.8	2.0 ± 0.5	13.0 ± 0.3
Symbol	W ₂	R				
Dimension	17.0 ± 1.4	1.0				

Appendix 6

Dimensions of reel (Material : Polystyrene)
CNA5, CNA6(8mm width taping type)

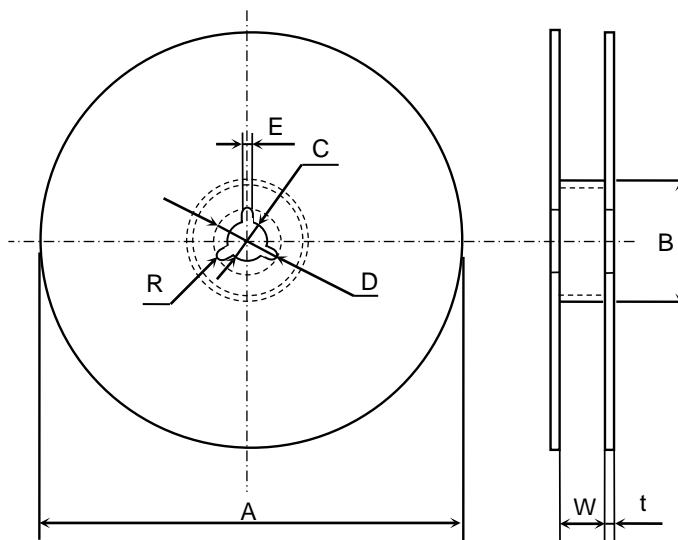


(Unit : mm)

Symbol	A	B	C	D	E	W
Dimension	Ø382 max. (Nominal Ø330)	Ø50 min.	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	10.0 ± 1.5
Symbol	t	R				
Dimension	2.0 ± 0.5	1.0				

Appendix 7

Dimensions of reel (Material : Polystyrene)
CNA6(12mm width taping type)



(Unit : mm)

Symbol	A	B	C	D	E	W
Dimension	Ø382 max. (Nominal Ø330)	Ø50 min.	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	14.0 ± 1.5
Symbol	t	R				
Dimension	2.0 ± 0.5	1.0				