


FB Series

Dry molding process / La-Co type FB5DH

Demagnetization curve

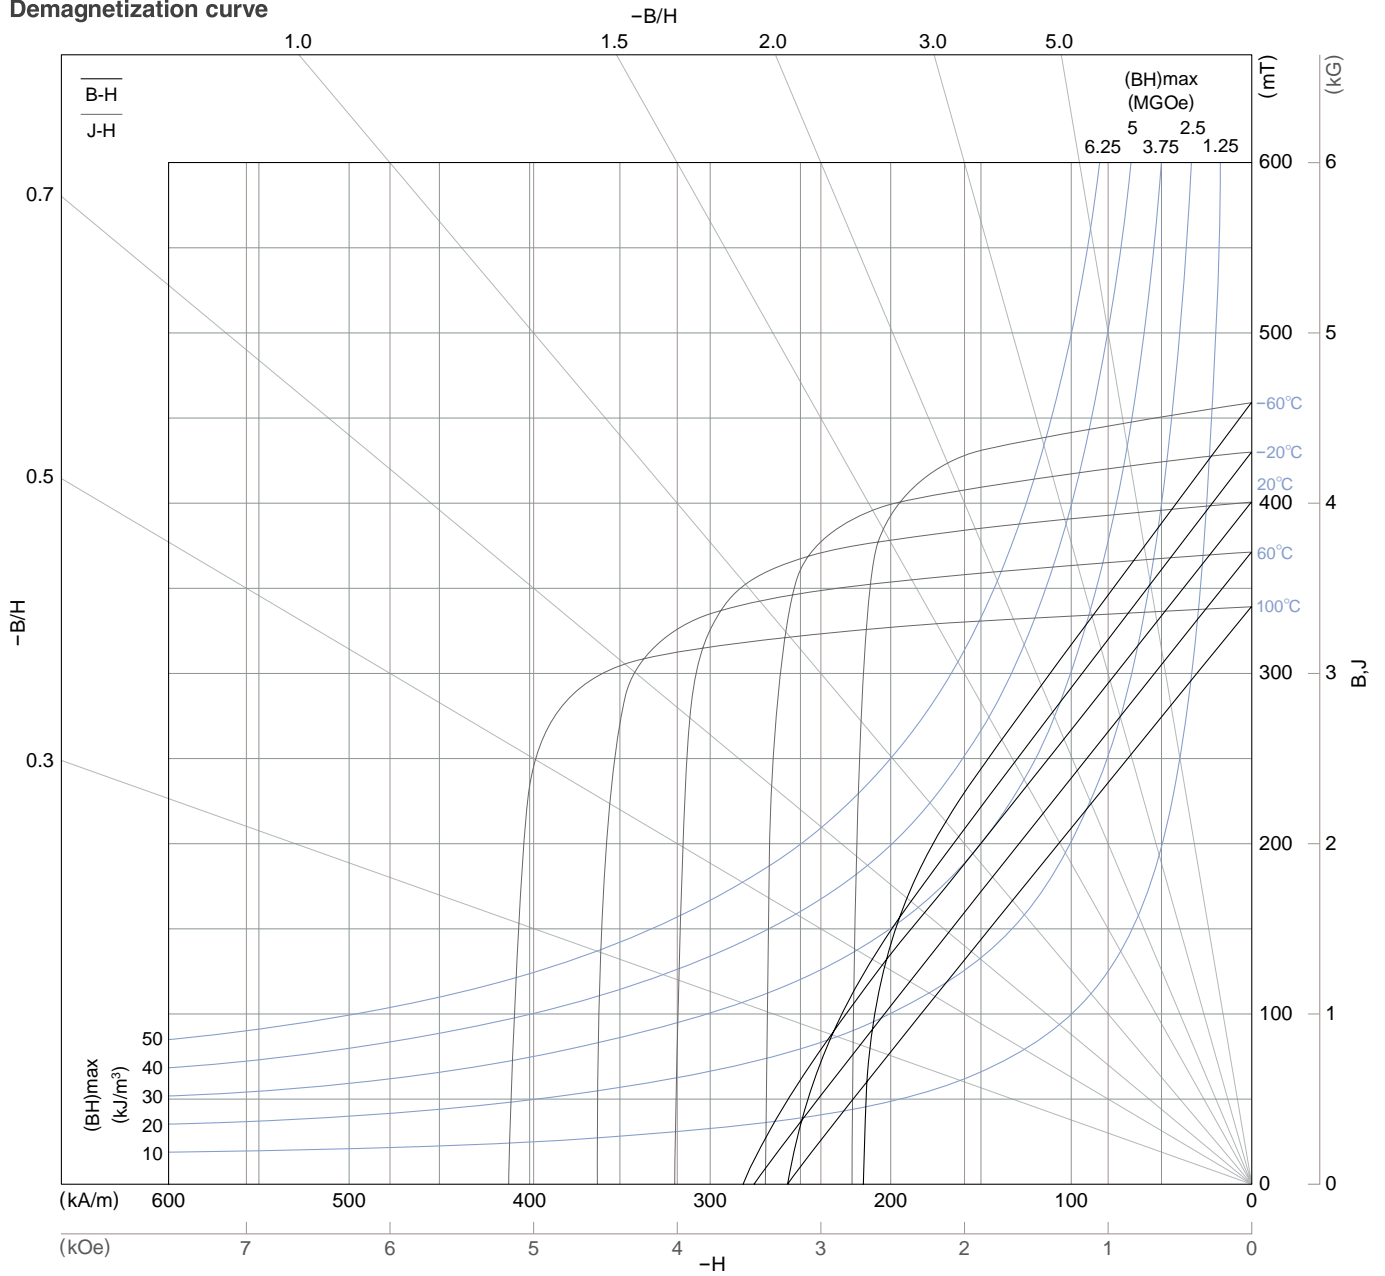

Magnetic characteristics

| Material | FB5DH | | |
|--------------------------------------|---------|------------------|------------------------------|
| Residual magnetic flux density B_r | (mT) | 400 ± 10 | $(4.00 \pm 0.1 \text{ kG})$ |
| Coercive force H_{CB} | (kA/m) | 278.6 ± 11.9 | $(3.5 \pm 0.15 \text{ kOe})$ |
| Intrinsic coercive force H_{CJ} | (kA/m) | 318.3 ± 15.9 | $(4.0 \pm 0.2 \text{ kOe})$ |
| Maximum energy product $(BH)_{max}$ | (kJ/m³) | 30.3 ± 1.6 | $(3.8 \pm 0.2 \text{ MGOe})$ |

△ The details can be found by referring to the appended individual delivery specifications.
All specifications are subject to change without notice.