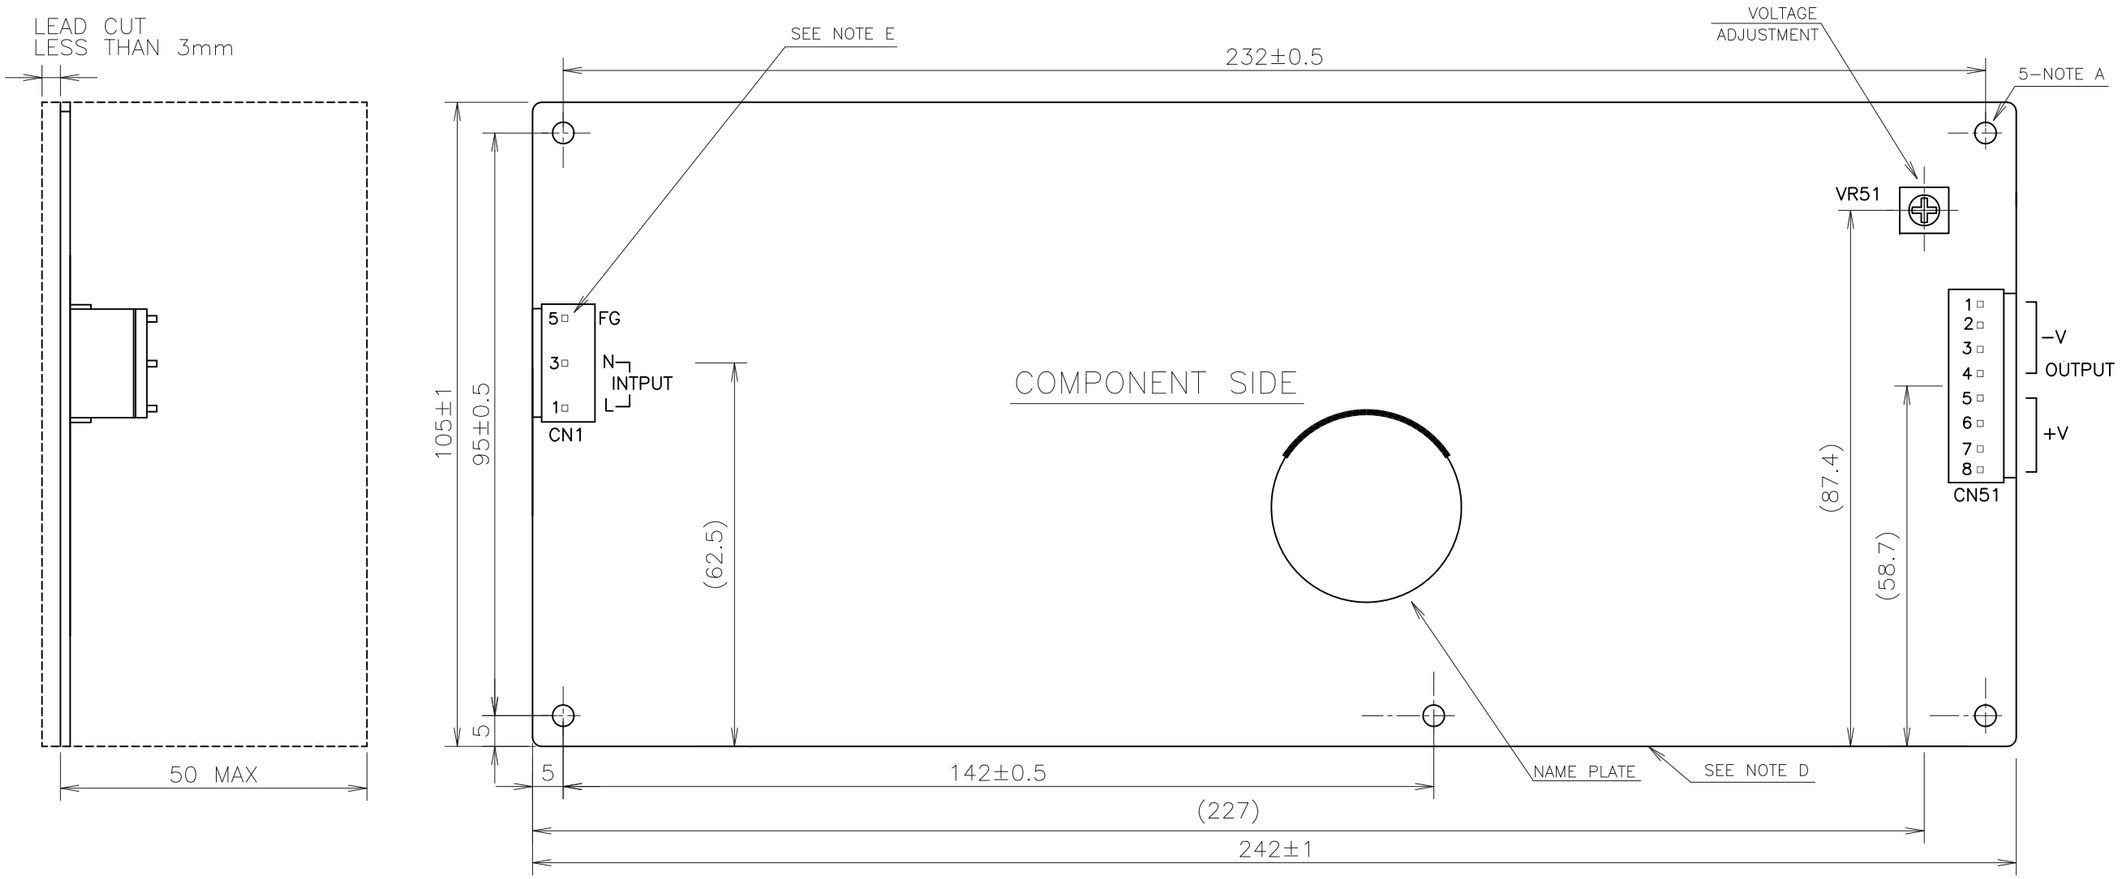

CONNECTORS USED

PART DESCRIPTION	PART NAME	MANUFACTURER	QTY
PIN HEADER (INPUT SIDE CN1)	B3P–5–VH	JST	1
PIN HEADER(OUTPUT SIDE CN51)	B8P–VH	JST	1

* OUTPUT CURRENT OF EACH CONNECTOR PIN MUST BE LESS THAN 5A.

MATCHING HOUSINGS & PIN.

* NOT INCLUDED WITH THE PRODUCT.

SOCKET HOUSING (CN1)	VHR–5N	JST	1
SOCKET HOUSING (CN51)	VHR–8N	JST	1
TERMINAL PINS (CN1, CN51)	SVH–21T–P1.1	JST	11

HAND CRIMPING TOOL: YC–160R MANUFACTURER: JST

NAME PLATE (SCALE : 2/1)

*QR CODE

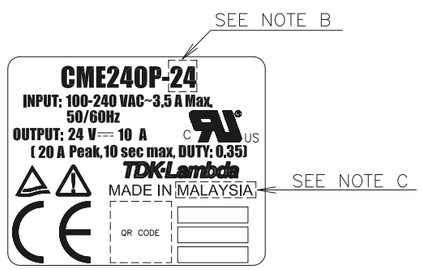

*BAR CODE

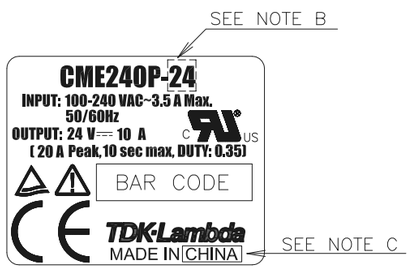

NOTES:

A. THE 5–ø3.5 HOLES ARE CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.

B. MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

C. COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.

D. TO KEEP THE DISTANCE MORE THAN 4m/m BETWEEN PC–BOARD EDGE AND CUSTOMER'S CHASSIS.

E. FG IS FOR SAFETY GROUND CONNECTION.

(unit : mm)

MODEL NAME	CME240P–24
TDK-Lambda	

B022–02–01E