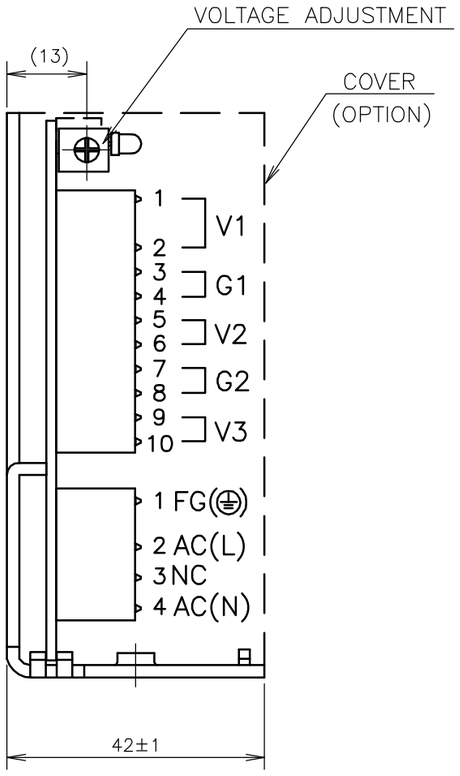

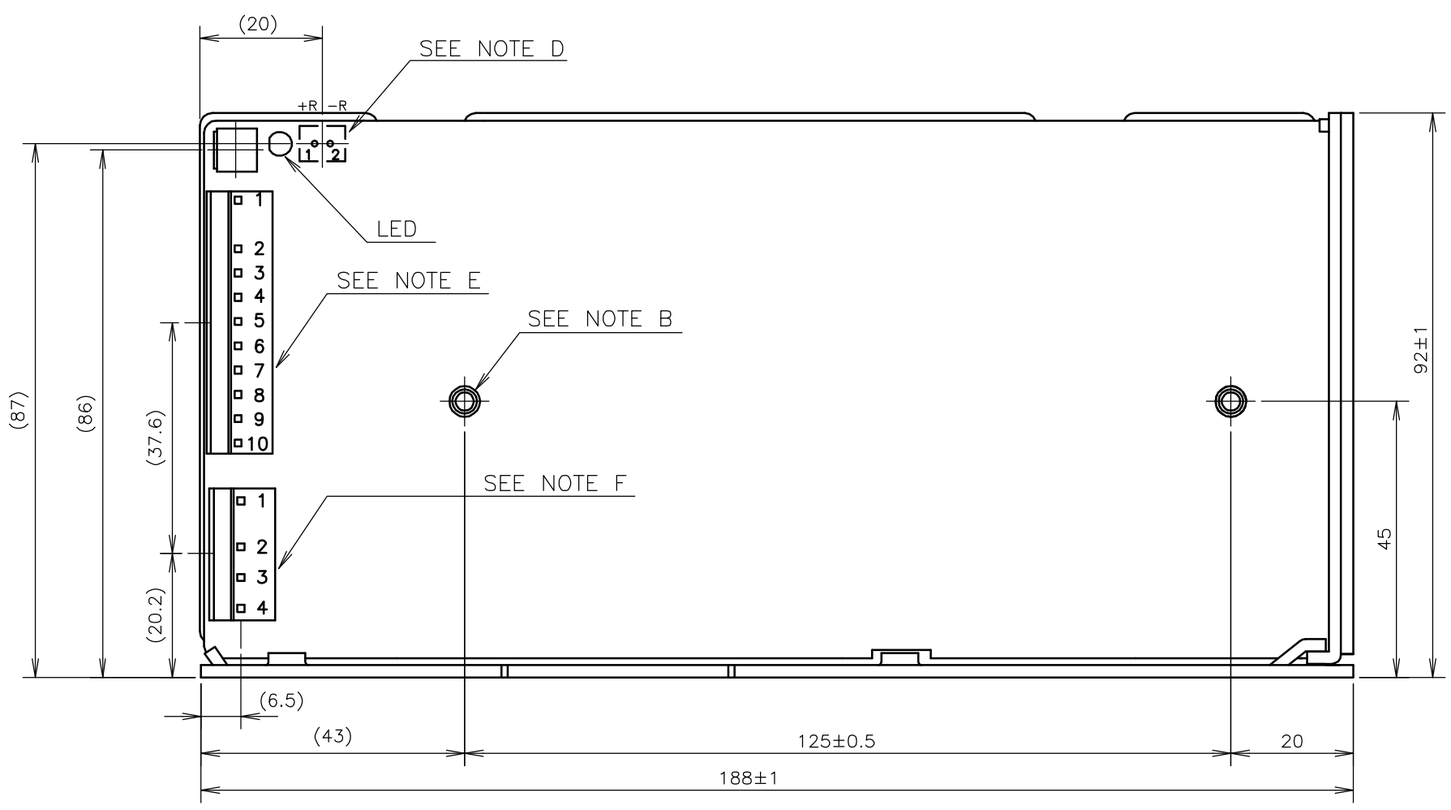

NOTES

A: MODEL NAME, OPTION, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

B: M4 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (4) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m.

C: ø4.5 HOLE FOR CUSTOMER CHASSIS MOUNTING. (USE M4 MOUNTING SCREW.)

D: REMOTE ON/OFF CONTROL CONNECTOR --- OPTION B2B-XH-AM (JST)

E: CONNECTOR: 5277-10A (MOLEX)

F: CONNECTOR: 5289-4A (MOLEX)

ACCESSORIES

* HOUSING: 5196-10 (MOLEX), TERMINAL: 5194PBT(MOLEX)
* HOUSING: 5199-04 (MOLEX), TERMINAL: 5194PBT(MOLEX)
* HOUSING: XHP-2 (JST), TERMINAL: BXH-001T-P0.6 (JST) OR SXH-001T-P0.6 (JST) --- OPTION

OPTIONAL MODELS

MODEL	COVER	REMOTE ON/OFF CONTROL	CONNECTOR INPUT/OUTPUT
JWT75-* /B			○
JWT75-* /C	○		○
JWT75-* /RB		○	○
JWT75-* /RC	○	○	○

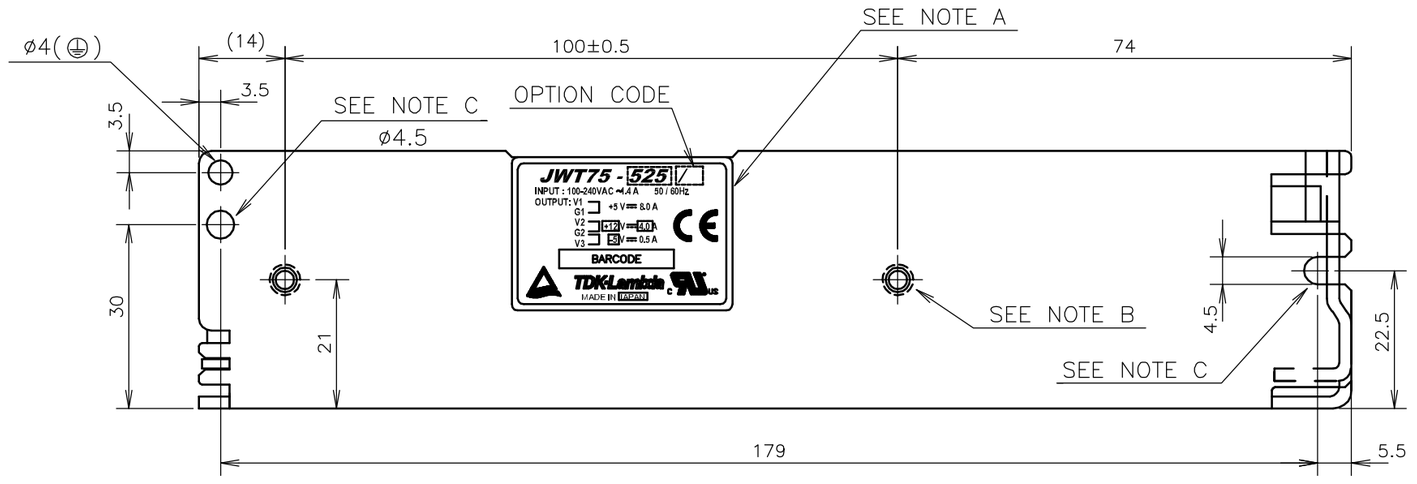

(unit : mm)

MODEL NAME	JWT75/B
TDK-Lambda	

A178-02-01/B-C