



### SIGNAL CONNECTOR INFORMATION

PIN CONFIGURATION AND FUNCTIONS OF CN1,CN2

PIN No.	FUNCTION
1	+Vm : +OUTPUT VOLTAGE MONITOR
2	+S : +SENSING
3	-Vm : -OUTPUT VOLTAGE MONITOR
4	-S : -SENSING
5	N.C. : NO CONNECTION
6	PC : CURRENT BALANCE
7	PV : ADJUSTMENT OF OUTPUT VOLTAGE
8	COM : GROUND FOR PC AND PV SIGNAL
9	CNT2 : REMOTE ON/OFF 2
10	TOG : GROUND FOR CNT2

PIN CONFIGURATION AND FUNCTIONS OF CN3

PIN No.	FUNCTION
1	COM : GROUND FOR PC AND PV SIGNAL
2	COM : GROUND FOR PC AND PV SIGNAL
3	AUX : AUXILIARY OUTPUT (12V 0.1A)
4	CNT1 : REMOTE ON/OFF 1
5	G2 : GROUND FOR AUX AND CNT1
6	G2 : GROUND FOR AUX AND CNT1
7	ALM : ALARM
8	G1 : ALARM GROUND

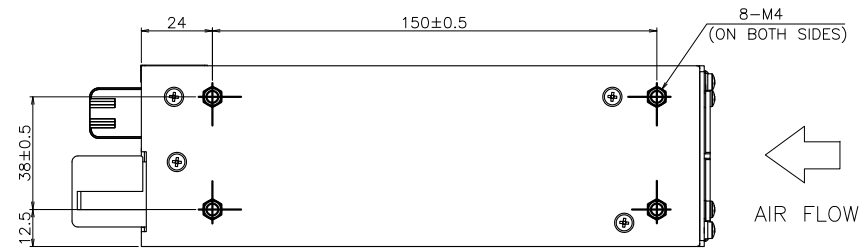

### SIGNAL CONNECTOR USED

PART DESCRIPTION	PART NAME	MANUFACT
PIN HEADER	S10B-PHDSS (CN1,CN2) S8B-PHDSS (CN3)	JST

### MATCHING HOUSINGS, PIN & TOOL

PART DESCRIPTION	PART NAME	MANUFACT
SOCKET HOUSING	PHDR-10VS (CN1,CN2) PHDR-8VS (CN3)	JST
TERMINAL PINS	SPHD-002T-P05(AWG28~24) SPHD-001T-P05(AWG26~22)	JST
HAND CRIMPING TOOL	YRS-620(SPHD-002T-P0.5) YC-610R(SPHD-001T-P0.5)	JST

### NOTE:

- MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, NOMINAL OUTPUT CURRENT PEAK OUTPUT CURRENT AND SAFETY MARKING(FOR ONLY APPROVED PRODUCTS) ARE SHOWN ON THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATIONS.
- COUNTRY OF MANUFACTURE IS SHOWN ON THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATIONS.
- M4 TAPPED HOLES (12) FOR CUSTOMER CHASSIS MOUNTING (SCREW PENETRATION DEPTH 6m/m MAX.).
- RECOMMENDED SCREW TORQUE:  
OUTPUT TERMINAL(M5 SCREW) = 2.5N·m  
INPUT TERMINAL(M4 SCREW) = 1.27N·m

(unit : mm)

MODEL NAME	HWS600L
<b>TDK-Lambda</b>	

CA771-02-01C