


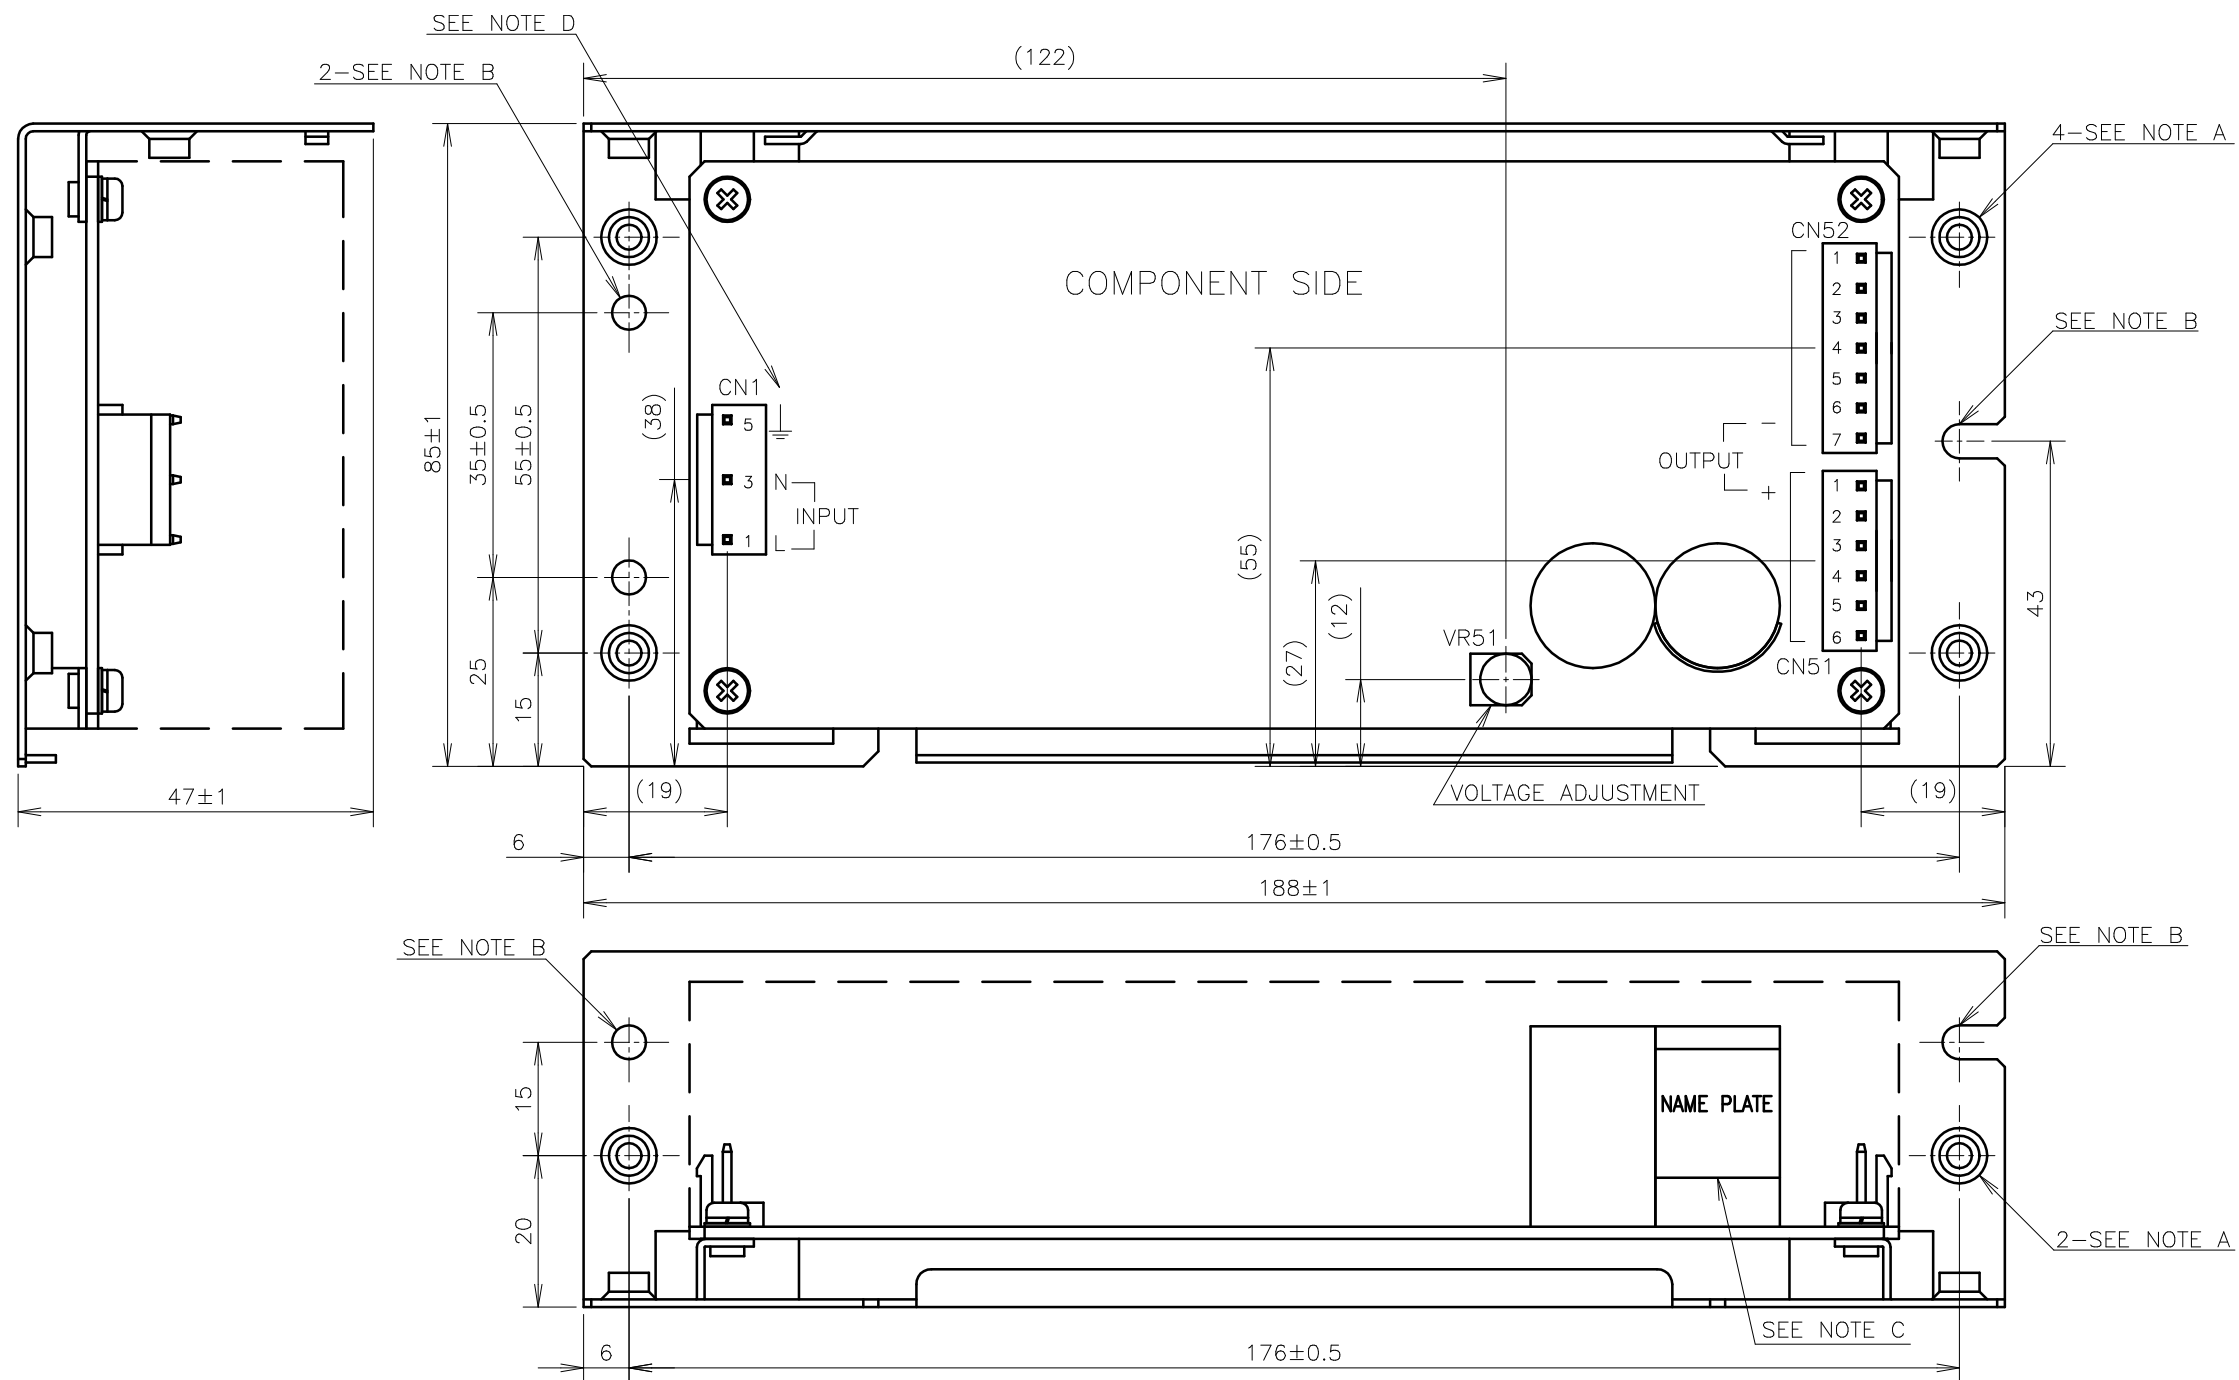

CONNECTORS USED:

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
PIN HEADER (INPUT SIDE CN1)	B3P5-VH(LF)(SN)	J.S.T.	1
PIN HEADER(OUTPUT SIDE CN51)	B6P-VH(LF)(SN)	J.S.T.	1
PIN HEADER(OUTPUT SIDE CN52)	B7P-VH(LF)(SN)	J.S.T.	1

*OUTPUT CURRENT OF EACH CONNECTOR PIN MUST BE LESS THAN 5A.

MATCHING HOUSINGS, PINS & TOOL (NOT INCLUDED WITH THE PRODUCT):

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
SOCKET HOUSING (CN1)	VHR-5N	J.S.T.	1
SOCKET HOUSING (CN51)	VHR-6N	J.S.T.	1
SOCKET HOUSING (CN52)	VHR-7N	J.S.T.	1
TERMINAL PINS	SVH-21T-P1.1 BVH-21T-P1.1	J.S.T.	16
HAND CRIMPING TOOL	YC-160R	J.S.T.	-

NOTES

A: 6xM4 EMBOSSED TAPPED & COUNTERSINK HOLES ARE FOR CUSTOMER'S CHASSIS MOUNTING. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION/EMI SPEC.

B: 3xØ4.5 HOLES AND 2xR2.25 SLOT HOLES ARE FOR CUSTOMER'S CHASSIS MOUNTING HOLES.

C: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT, COUNTRY OF MANUFACTURE AND SAFETY MARKING (FOR ONLY APPROVED PRODUCTS) ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

D: IS PROTECTIVE BONDING TERMINAL.

(unit : mm)

MODEL NAME	VS150E/L
------------	----------

TDK-Lambda

A242-02-01/L-C