

# **HWS3000G-80**

## **EVALUATION DATA**

### 型式データ

## INDEX

	PAGE
<b>1. 測定方法 Evaluation Method</b>	
1-1. 測定回路 Circuit used for determination	
測定回路1 Circuit 1 used for determination	<a href="#">4</a>
静特性 Steady state data	
通電ドリフト特性 Warm up voltage drift characteristics	
出力保持時間特性 Hold up time characteristics	
出力電圧立ち上がり/立ち下がり特性 Output voltage rise/fall characteristics	
出力電流立ち上がり/立ち下がり特性 Output current rise/fall characteristics	
過電流保護特性 Over current protection (OCP) characteristics	
入力電圧瞬停特性 Response to brown out characteristics	
入力電流波形 Input current waveform	
過渡応答(負荷急変)特性 Dynamic load response characteristics	
出力リップル、ノイズ電流波形 Output ripple and noise current waveform	
測定回路2 Circuit 2 used for determination	<a href="#">4</a>
リーク電流特性 Leakage current characteristics	
測定回路3 Circuit 3 used for determination	<a href="#">5</a>
過電圧保護特性 Over voltage protection (OVP) characteristics	
測定回路4 Circuit 4 used for determination	<a href="#">5</a>
入力サージ電流(突入電流)波形 Inrush current waveform	
測定回路5 Circuit 5 used for determination	<a href="#">5</a>
高調波成分 Input current harmonics	
測定回路6 Circuit 6 used for determination	<a href="#">6</a>
ON/OFFコントロール時出力立ち上がり、立ち下がり特性	
Output rise, fall characteristics with ON/OFF Control	
測定回路7 Circuit 7 used for determination	<a href="#">7</a>
出力リップル、ノイズ電圧波形 Output ripple and noise voltage waveform	
測定構成 Configuration used for determination	<a href="#">7</a>
EMI特性 Electro-Magnetic Interference characteristics	
(a) 雑音端子電圧(帰還ノイズ) Conducted Emission	
(b) 雑音電界強度(放射ノイズ) Radiated Emission	
1-2. 使用測定機器 List of equipment used	<a href="#">8</a>
<b>2. 特性データ Characteristics</b>	
2-1. 定電圧出力モード Constant voltage output mode	
2-1-1. 静特性 Steady state data	
(1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift	<a href="#">9</a>
(2) リップルノイズ電圧対出力電流 Ripple noise voltage vs. Output current	<a href="#">10</a>
(3) 効率・力率対出力電流 Efficiency and Power factor vs. Output current	<a href="#">11</a>
(4) 入力電力対出力電流 Input power vs. Output current	<a href="#">12</a>
(5) 入力電流対出力電流 Input current vs. Output current	<a href="#">13</a>
2-1-2. 通電ドリフト特性 Warm up voltage drift characteristics	<a href="#">14</a>
2-1-3. 出力保持時間特性 Hold up time characteristics	<a href="#">14</a>
2-1-4. 出力電圧立ち上がり特性 Output voltage rise characteristics	<a href="#">15</a>

	PAGE
2-1-5. 出力電圧立ち下がり特性 Output voltage fall characteristics	<a href="#">16</a>
2-1-6. ON/OFFコントロール時出力立ち上がり、立ち下がり特性 Output rise, fall characteristics with ON/OFF Control	
(a) リモートON/OFFコントロール端子によるON/OFF ON/OFF control by remote ON/OFF control terminal	<a href="#">17-18</a>
(b) RS-485通信によるON/OFF ON/OFF control by RS-485	<a href="#">19-20</a>
2-1-7. 過渡応答(負荷急変)特性 Dynamic load response characteristics	<a href="#">21</a>
2-1-8. 入力電圧瞬停特性 Response to brown out characteristics	<a href="#">22</a>
2-1-9. 出力リップル、ノイズ波形 Output ripple and noise waveform	<a href="#">22</a>
2-2. 定電流出力モード Constant current output mode	
2-2-1. 静特性 Steady state data	
(1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift	<a href="#">23</a>
(2) リップルノイズ電流対出力電圧 Ripple noise current vs. Output voltage	<a href="#">24</a>
(3) 効率・力率対出力電圧 Efficiency and Power factor vs. Output voltage	<a href="#">25</a>
(4) 入力電力対出力電圧 Input power vs. Output voltage	<a href="#">26</a>
(5) 入力電流対出力電圧 Input current vs. Output voltage	<a href="#">27</a>
2-2-2. 通電ドリフト特性 Warm up current drift characteristics	<a href="#">28</a>
2-2-3. 出力電流立ち上がり特性 Output current rise characteristics	<a href="#">29</a>
2-2-4. 出力電流立ち下がり特性 Output current fall characteristics	<a href="#">30</a>
2-2-5. ON/OFFコントロール時出力立ち上がり、立ち下がり特性 Output rise, fall characteristics with ON/OFF Control	
(a) リモートON/OFFコントロール端子によるON/OFF ON/OFF control by remote ON/OFF control terminal	<a href="#">31-32</a>
(b) RS-485通信によるON/OFF ON/OFF control by RS-485	<a href="#">33-34</a>
2-2-6. 入力電圧瞬停特性 Response to brown out characteristics	<a href="#">35</a>
2-2-7. 出力リップル、ノイズ波形 Output ripple and noise waveform	<a href="#">35</a>
2-3. 過電流保護特性 Over current protection (OCP) characteristics	<a href="#">36</a>
2-4. 過電圧保護特性 Over voltage protection (OVP) characteristics	<a href="#">37</a>
2-5. 入力サージ電流(突入電流)波形 Inrush current waveform	<a href="#">38</a>
2-6. 高調波成分 Input current harmonics	<a href="#">39</a>
2-7. 入力電流波形 Input current waveform	<a href="#">39</a>
2-8. リーク電流特性 Leakage current characteristics	<a href="#">40</a>
2-9. EMI特性 Electro Magnetic Interference characteristics	<a href="#">41-44</a>

使用記号Terminology used

Ta : 周囲温度 Ambient temperature	f : 周波数 Frequency
Vin : 入力電圧 Input voltage	Iin : 入力電流 Input current
Vout : 出力電圧 Output voltage	Iout : 出力電流 Output current
Vaux : AUX電圧 AUX voltage	Iaux : AUX電流 AUX current

※ 当社測定条件における結果であり、参考値としてお考え願います。  
Test results are reference data based on our measurement condition.

## 1. 測定方法 Evaluation Method

## 1-1. 測定回路 Circuit used for determination

## 測定回路1 Circuit 1 used for determination

静特性 Steady state data

通電ドリフト特性 Warm up voltage drift characteristics

出力保持時間特性 Hold up time characteristics

出力電圧立ち上がり/立ち下がり特性 Output voltage rise/fall characteristics

出力電流立ち上がり/立ち下がり特性 Output current rise/fall characteristics


過電流保護特性 Over current protection (OCP) characteristics

入力電圧瞬停特性 Response to brown out characteristics

入力電流波形 Input current waveform


過渡応答（負荷急変）特性 Dynamic load response characteristics

出力リップル、ノイズ電流波形 Output ripple and noise current waveform

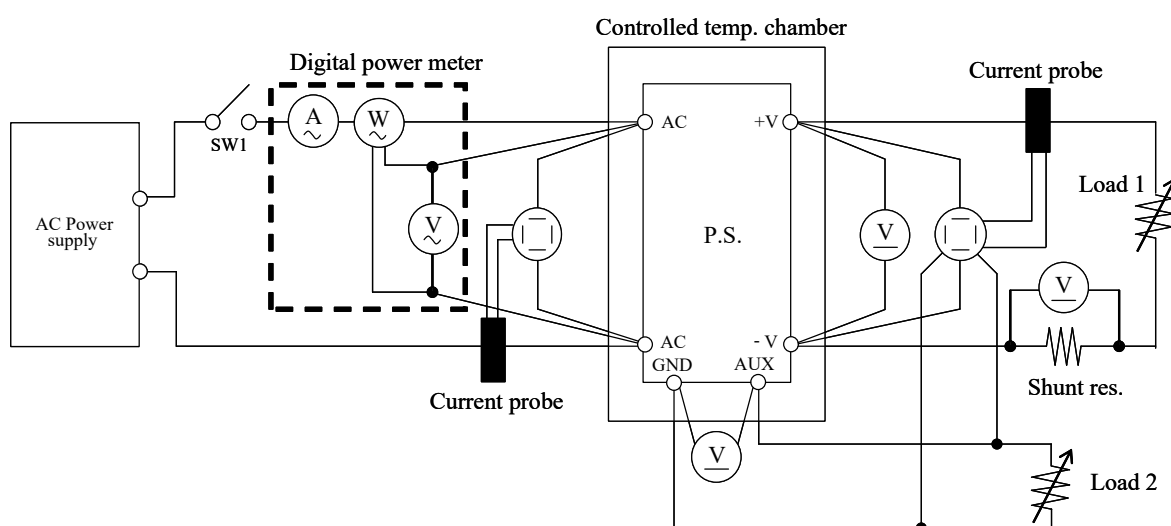


## 測定回路2 Circuit 2 used for determination

リーク電流特性 Leakage current characteristics

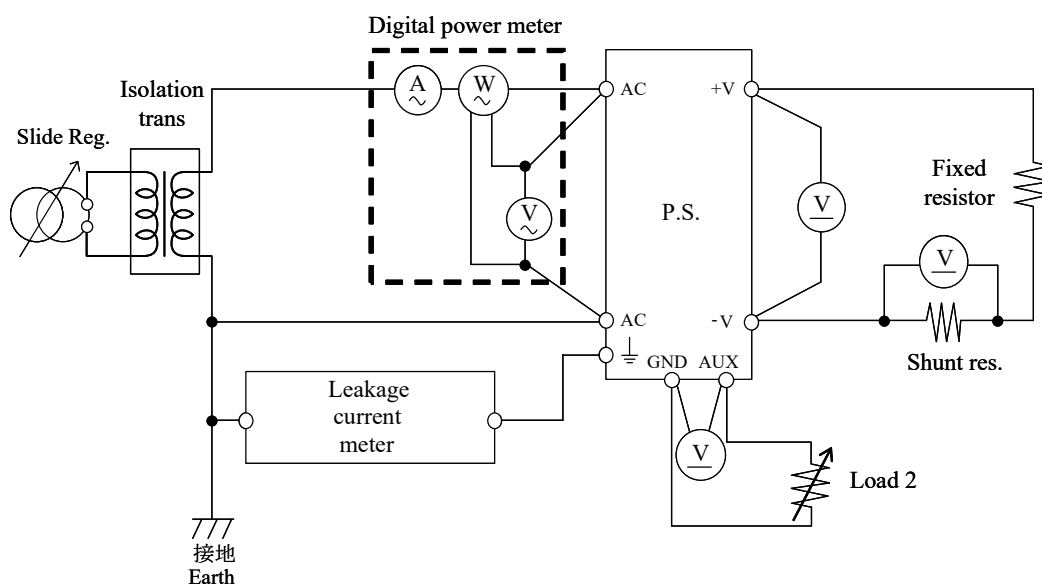


測定回路3 Circuit 3 used for determination

過電圧保護特性 Over voltage protection (OVP) characteristics

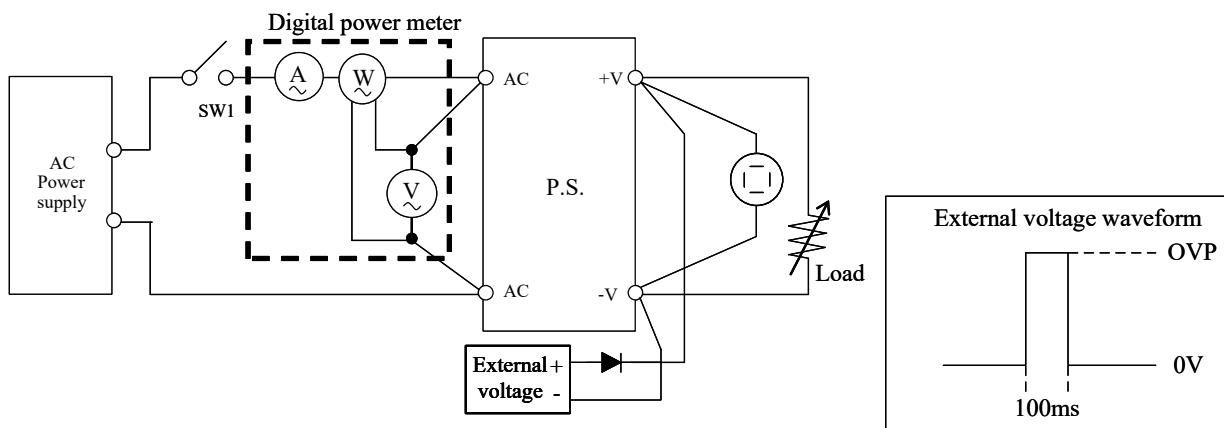


測定回路4 Circuit 4 used for determination

入力サージ電流 (突入電流) 波形 Inrush current waveform

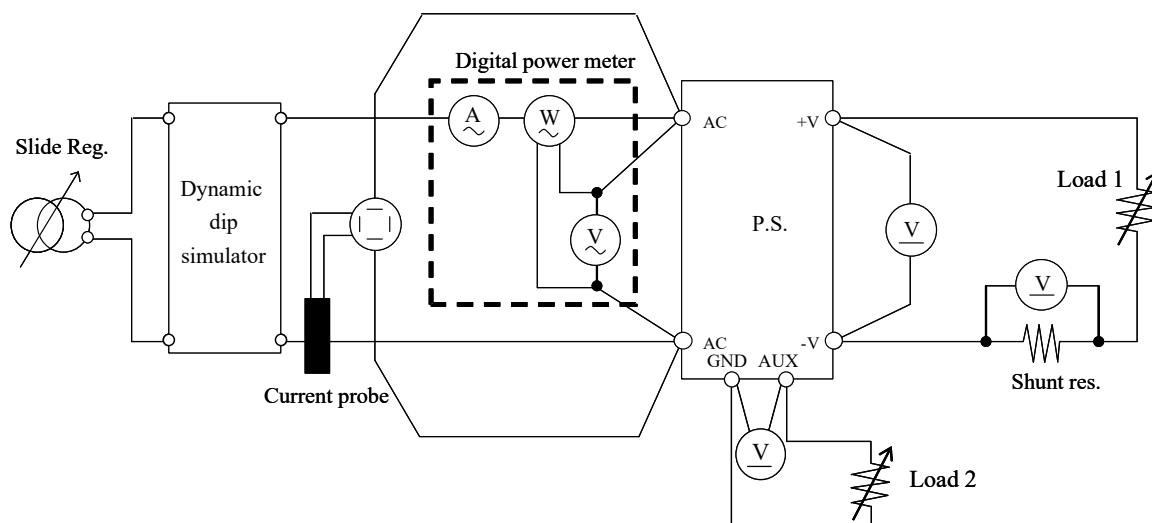

測定回路5 Circuit 5 used for determination


高調波成分 Input current harmonics

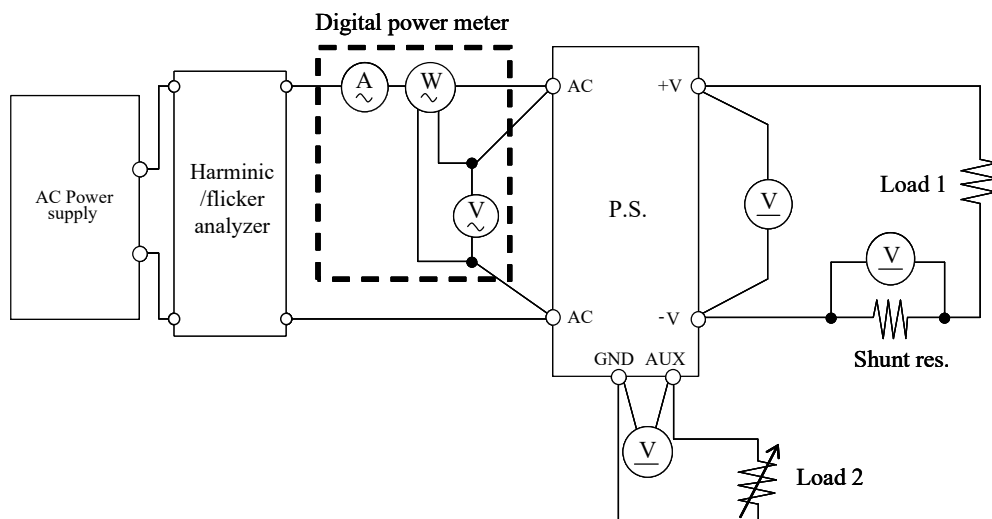


## 測定回路6 Circuit 6 used for determination

ON/OFFコントロール時出力立ち上がり、立ち下がり特性  
Output rise, fall characteristics with ON/OFF Control

(a) リモートON/OFFコントロール端子によるON/OFF  
ON/OFF control by remote ON/OFF control terminal

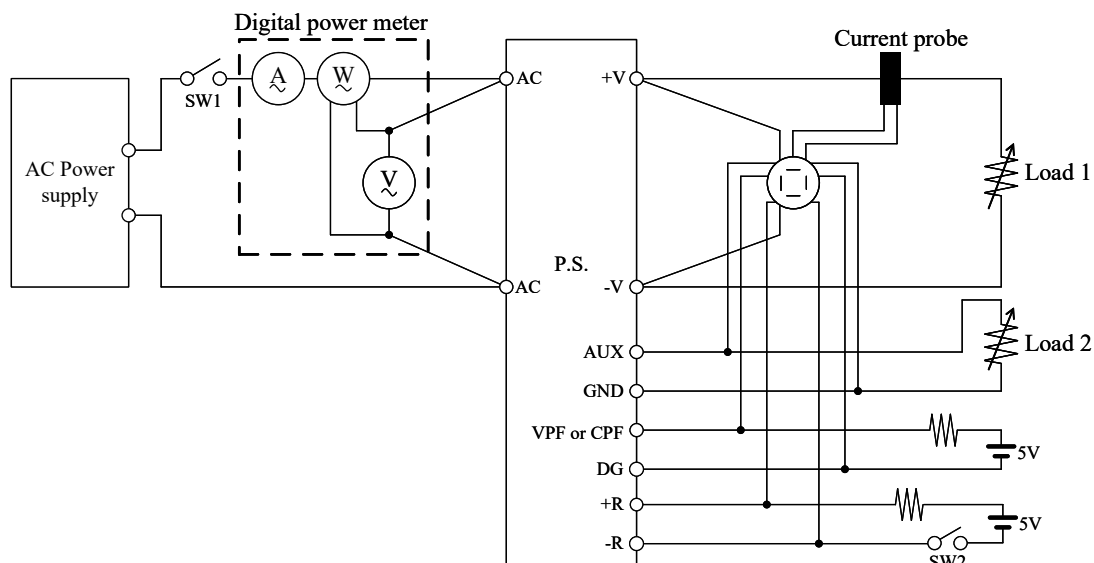


(b) RS-485通信によるON/OFF ON/OFF control by RS-485

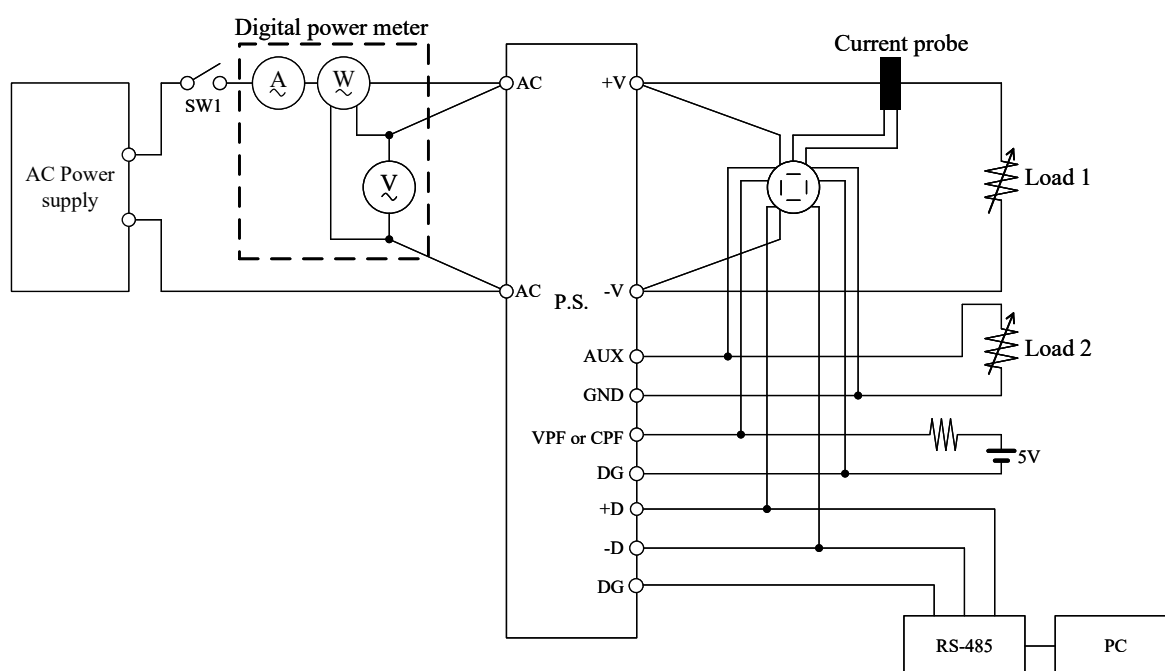

測定回路7 Circuit 7 used for determination


出力リップル、ノイズ電圧波形 Output ripple and noise voltage waveform

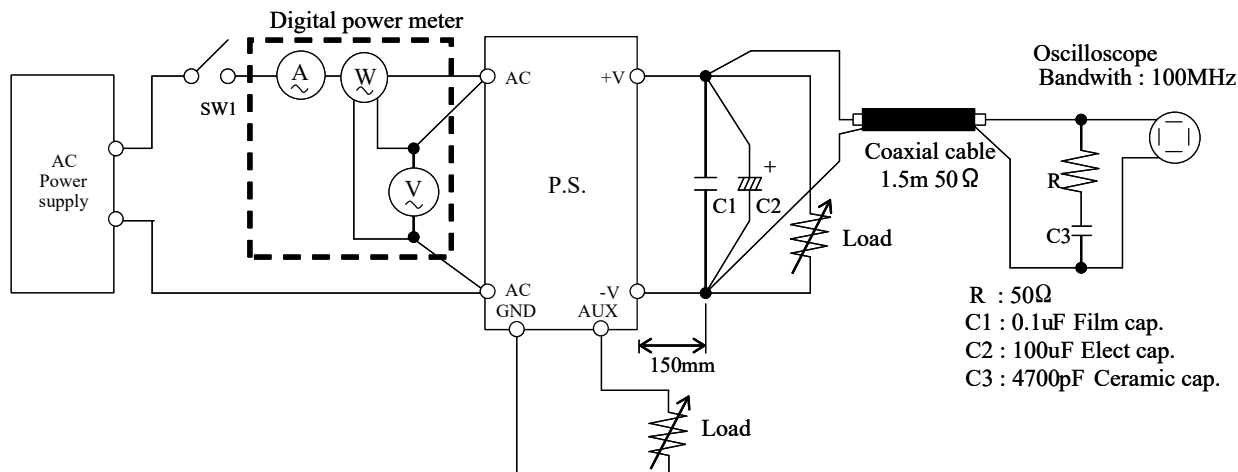


測定構成 Configuration used for determination

EMI特性 Electro-Magnetic Interference characteristics

(a) 雑音端子電圧 (帰還ノイズ) Conducted Emission

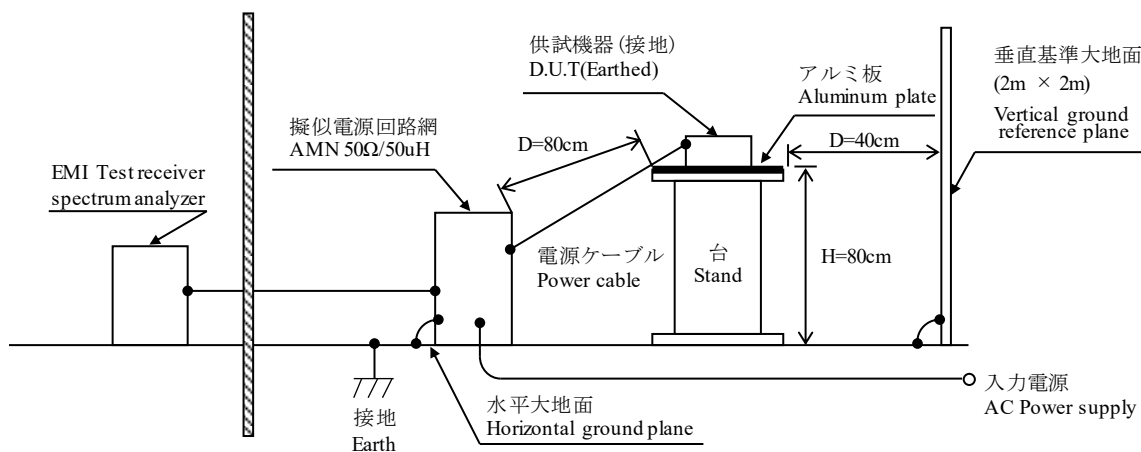

(b) 雑音電界強度 (放射ノイズ) Radiated Emission

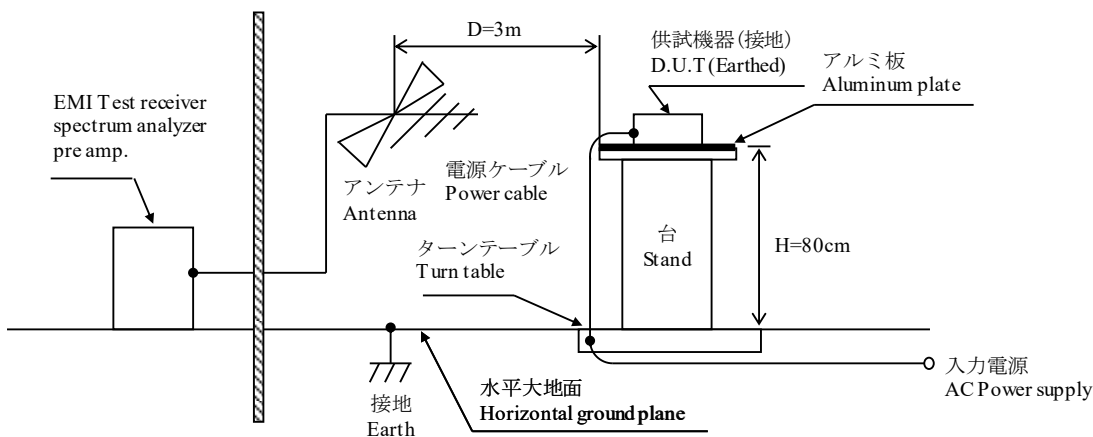

## 1-2. 使用測定機器 List of equipment used

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	DIGITAL STORAGE OSCILLOSCOPE	YOKOGAWA ELECT.	DLM3054
2	DIGITAL MULTIMETER	KEYSIGHT	34970A
3	DIGITAL POWER METER	HIOKI	PW3337
4	CURRENT PROBE	YOKOGAWA ELECT.	701930
5	DYNAMIC DUMMY LOAD	KIKUSUI	PLZ10005WSR
6	CVCF	KIKUSUI	PCR12000WE2R
7	CONTROLLED TEMP. CHAMBER	ESPEC	PSL-4J
8	DYNAMIC DUMMY LOAD	KIKUSUI	PLZ205W
9	LEAKAGE CURRENT METER	HIOKI	ST5540
10	EMI TEST RECEIVER / SPECTRUM ANALYZER	ROHDE & SCHWARZ	ESR3
11	PRE AMP.	SONOMA	310N
12	AMN	SCHWARZBECK	NNLK8121
13	ANTENNA	TESEQ	CBL6111D
14	HARMONIC / FLICKER ANALYZER	KIKUSUI	KHA1000
15	SINGLE-PHASE MASTER	NF	4420
16	REFERENCE IMPEDANCE NETWORK 20A	NF	4150
17	MULTI OUTLET UNIT	KIKUSUI	OT01-KHA

## 2. 特性データ Characteristics

## 2-1. 定電圧出力モード Constant voltage output mode

## 2-1-1. 静特性 Steady state data

## (1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift

## 1. Regulation - line and load

Condition Ta : 25 °C

Iout \ Vin	85VAC	100VAC	115VAC	132VAC	Line regulation	
0A	79.947V	79.945V	79.943V	79.945V	4mV	0.005%
9.4A	79.908V	79.919V	79.902V	79.917V	17mV	0.021%
18.75A	79.916V	79.917V	79.911V	79.920V	9mV	0.011%
Load regulation	39mV	28mV	41mV	28mV		
	0.049%	0.035%	0.051%	0.035%		

Iout \ Vin	170VAC	200VAC	230VAC	265VAC	Line regulation	
0A	79.965V	79.959V	79.960V	79.963V	6mV	0.008%
18.75A	79.921V	79.922V	79.915V	79.918V	7mV	0.009%
37.5A	79.945V	79.952V	79.939V	79.949V	13mV	0.016%
Load regulation	44mV	37mV	45mV	45mV		
	0.055%	0.046%	0.056%	0.056%		

## 2. Temperature drift

Conditions Vin : 100 VAC

Iout : 18.75 A

Ta	-20°C	+25°C	+50°C	Temperature stability	
Vout	79.891V	79.917V	79.856V	61mV	0.076%


Conditions Vin : 200 VAC

Iout : 37.5 A


Ta	-20°C	+25°C	+50°C	Temperature stability	
Vout	79.915V	79.952V	79.869V	83mV	0.104%

(2) リップルノイズ電圧対出力電流 Ripple noise voltage vs. Output current

Conditions Vin : 100 VAC  
 Vout : 80 V  
 Ta : -20 °C ---  
 25 °C - - -  
 50 °C ———

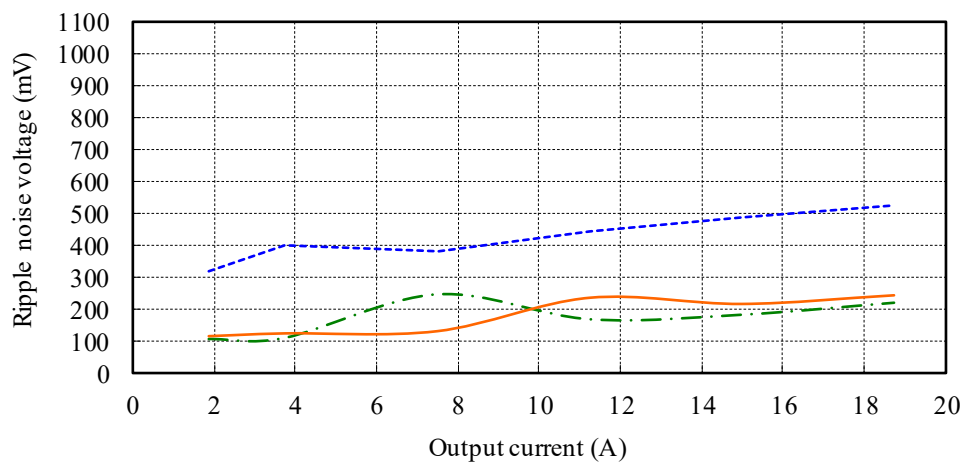

Conditions Vin : 200 VAC  
 Vout : 80 V  
 Ta : -20 °C ---  
 25 °C - - -  
 50 °C ———

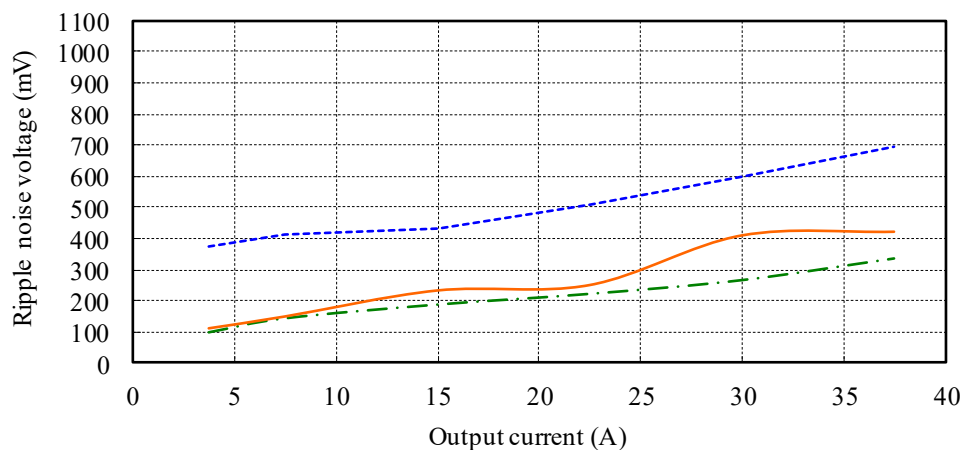




(4) 入力電力対出力電流 Input power vs. Output current


V <sub>in</sub>	Input power	
	I <sub>out</sub> : 0%	Control OFF
100VAC	25.5W	8.9W
115VAC	25.5W	8.3W

Conditions Vin : 100 VAC ---  
 115 VAC - - -  
 Vout : 80 V  
 Iaux : 0 %  
 Ta : 25 °C

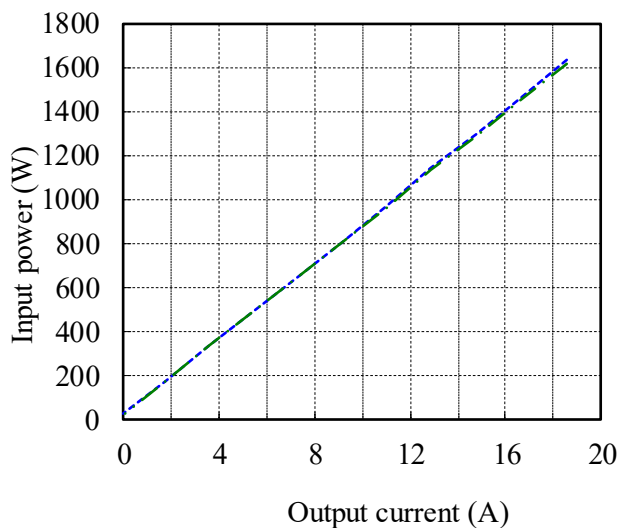

V <sub>in</sub>	Input power	
	I <sub>out</sub> : 0%	Control OFF
200VAC	13.7W	7.2W
230VAC	13.7W	7.3W


Conditions Vin : 200 VAC —  
 230 VAC - - -  
 Vout : 80 V  
 Iaux : 0 %  
 Ta : 25 °C

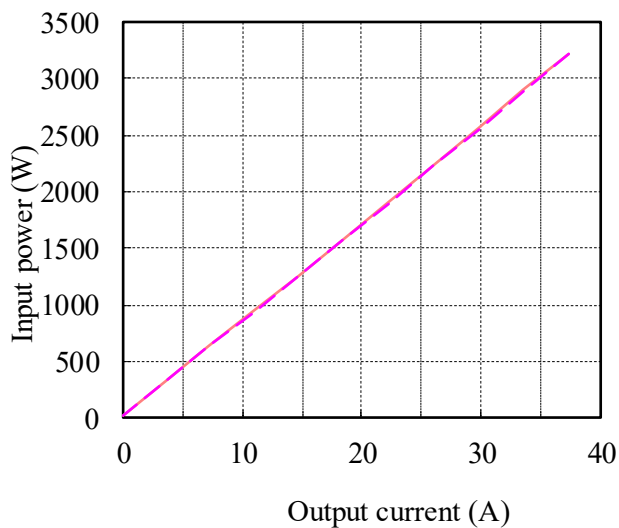

(5) 入力電流対出力電流 Input current vs. Output current


V <sub>in</sub>	Input current	
	I <sub>out</sub> : 0%	Control OFF
100VAC	0.37A	0.19A
115VAC	0.35A	0.18A

Conditions Vin : 100 VAC ---  
 115 VAC - - -  
 Vout : 80 V  
 Iaux : 0 %  
 Ta : 25 °C

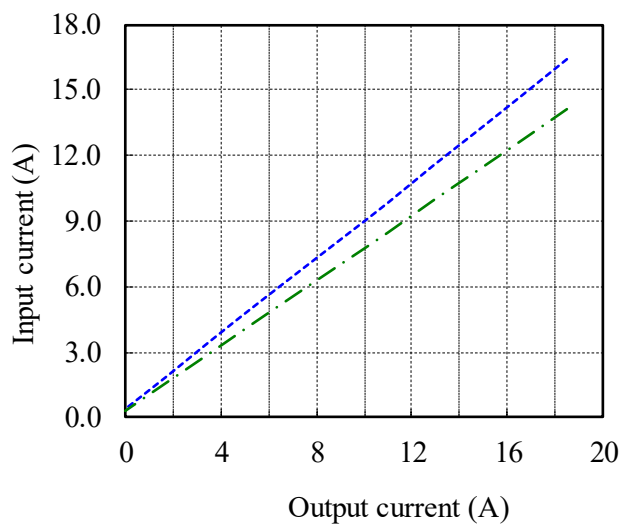


V <sub>in</sub>	Input current	
	I <sub>out</sub> : 0%	Control OFF
200VAC	0.26A	0.22A
230VAC	0.27A	0.24A

Conditions Vin : 200 VAC ---  
 230 VAC - - -  
 Vout : 80 V  
 Iaux : 0 %  
 Ta : 25 °C

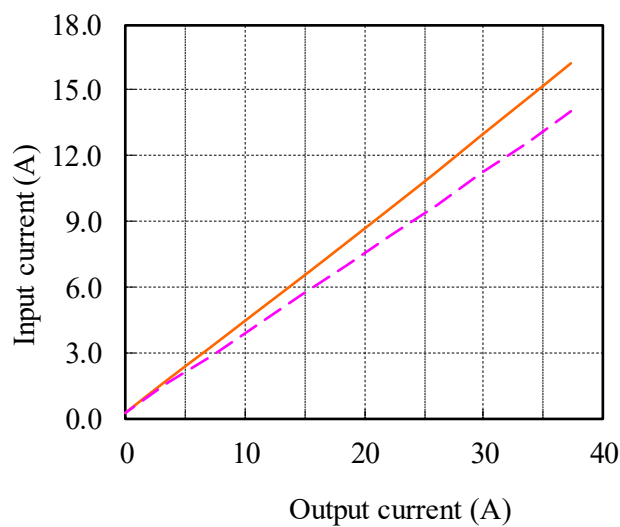


2-1-2. 通電ドリフト特性 Warm up voltage drift characteristics

Conditions  $V_{in}$  : 100 VAC  
 $V_{out}$  : 80 V  
 $I_{out}$  : 18.75 A  
 $T_a$  : 25 °C

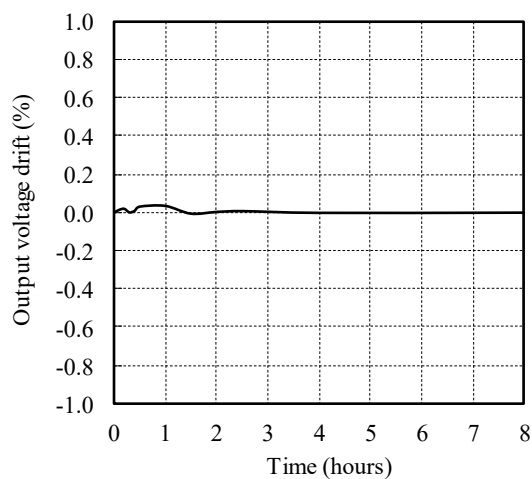


Conditions  $V_{in}$  : 200 VAC  
 $V_{out}$  : 80 V  
 $I_{out}$  : 37.5 A  
 $T_a$  : 25 °C

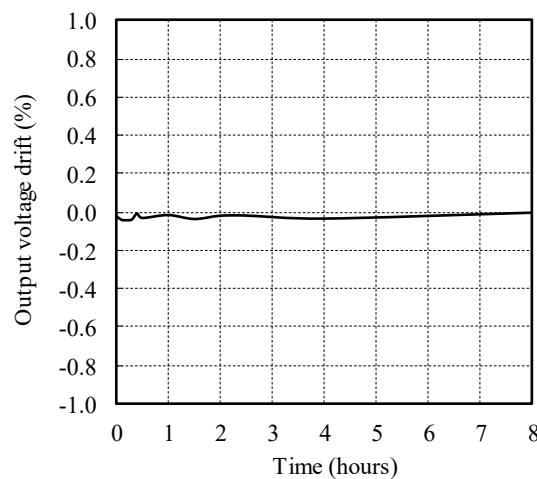


2-1-3. 出力保持時間特性 Hold up time characteristics

Conditions  $V_{in}$  : 100 VAC  
 $V_{out}$  : 80 V  
 $T_a$  : 25 °C

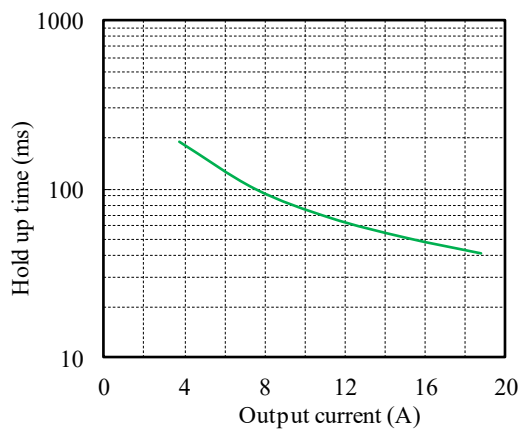


Conditions  $V_{in}$  : 200 VAC  
 $V_{out}$  : 80 V  
 $T_a$  : 25 °C

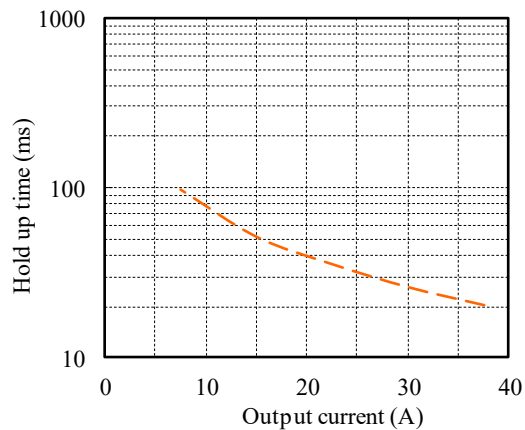


2-1-4. 出力電圧立ち上がり特性 Output voltage rise characteristics

Conditions  $V_{in}$  : 100 VAC (A)  
 115 VAC (B)  
 $I_{aux}$  : 100 %  
 $T_a$  : 25 °C


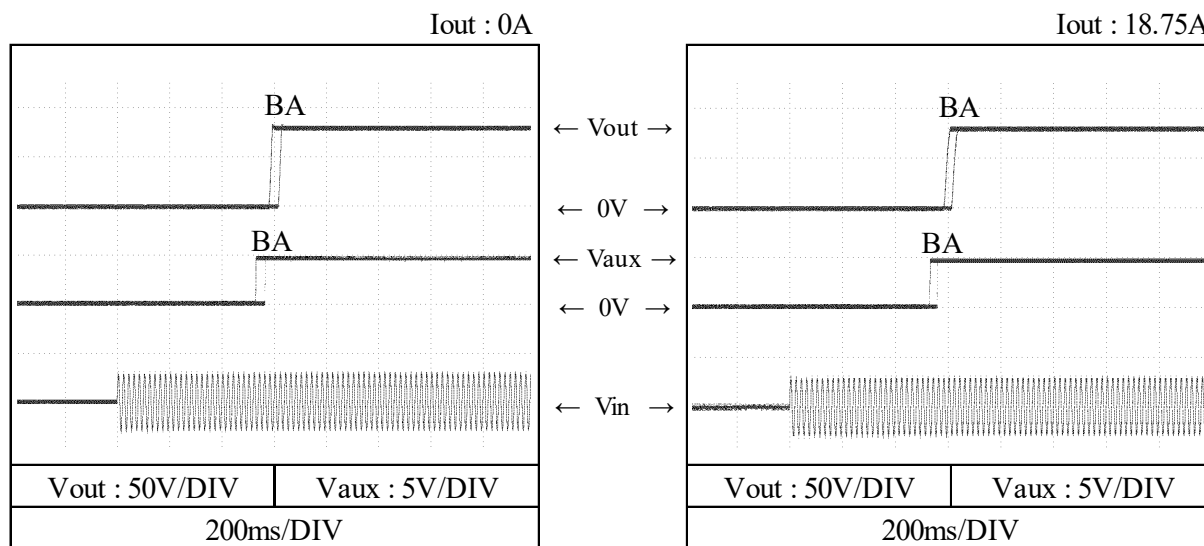


Conditions  $V_{in}$  : 200 VAC (C)  
 230 VAC (D)  
 $I_{aux}$  : 100 %  
 $T_a$  : 25 °C


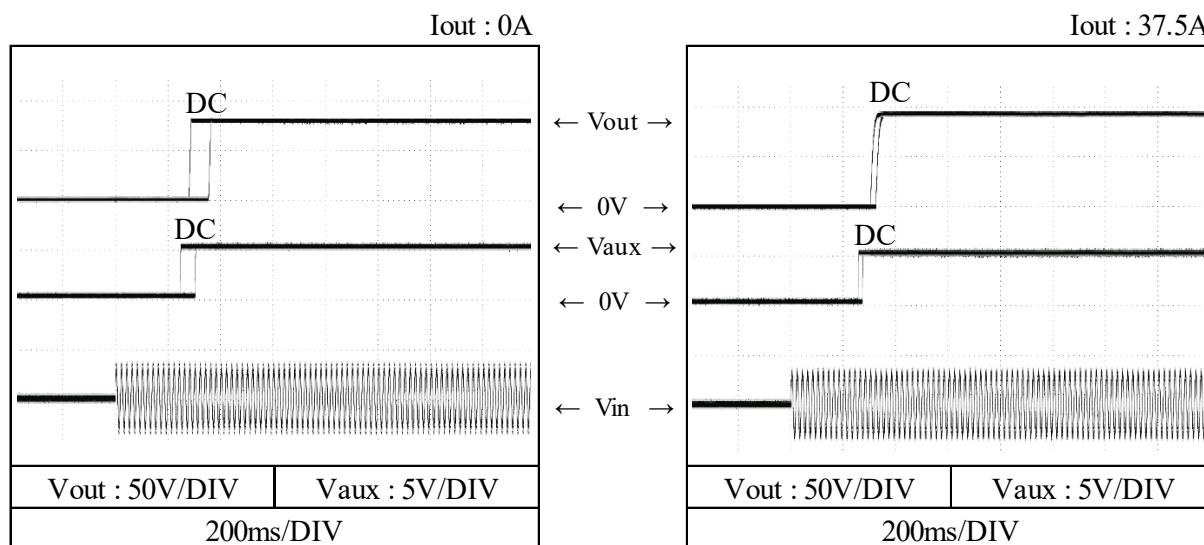


2-1-5. 出力電圧立ち下がり特性 Output voltage fall characteristics

Conditions  $V_{in}$  : 100 VAC (A)  
 115 VAC (B)  
 $I_{aux}$  : 100 %  
 $T_a$  : 25 °C

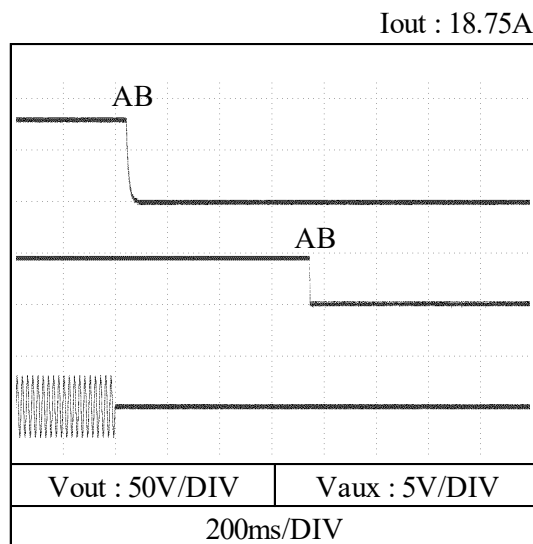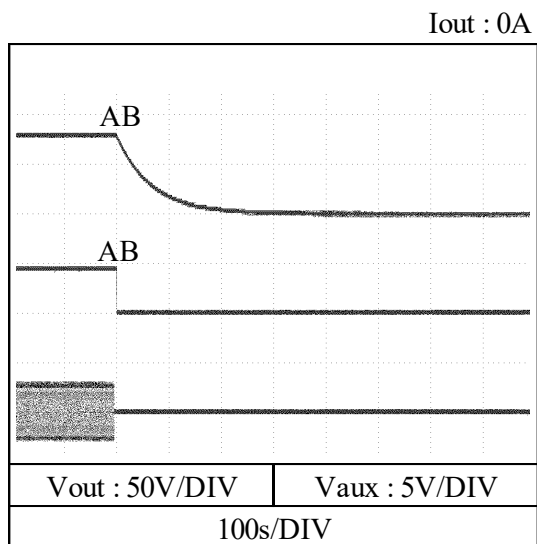

Conditions  $V_{in}$  : 200 VAC (C)  
 230 VAC (D)  
 $I_{aux}$  : 100 %  
 $T_a$  : 25 °C

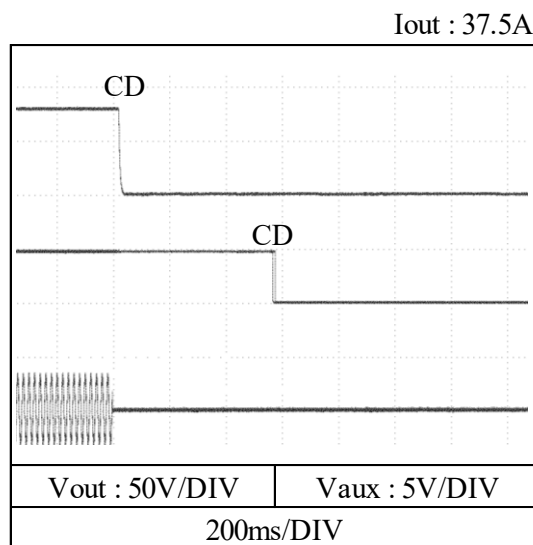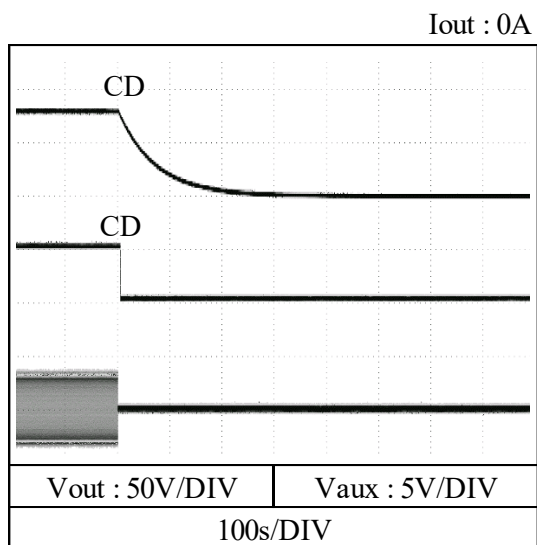

2-1-6. ON/OFFコントロール時出力立ち上がり、立ち下がり特性

Output rise, fall characteristics with ON/OFF Control


(a) リモートON/OFFコントロール端子によるON/OFF

ON/OFF control by remote ON/OFF control terminal


Conditions  $V_{in}$  : 100 VAC

$T_a$  : 25 °C

$I_{out}$  : 0A

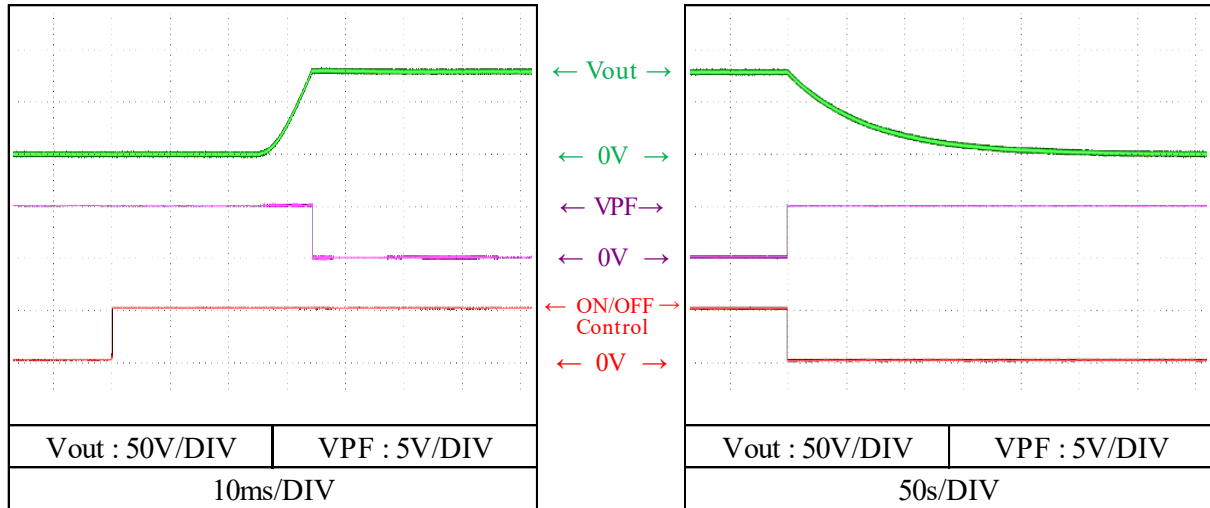

$I_{out}$  : 18.75A

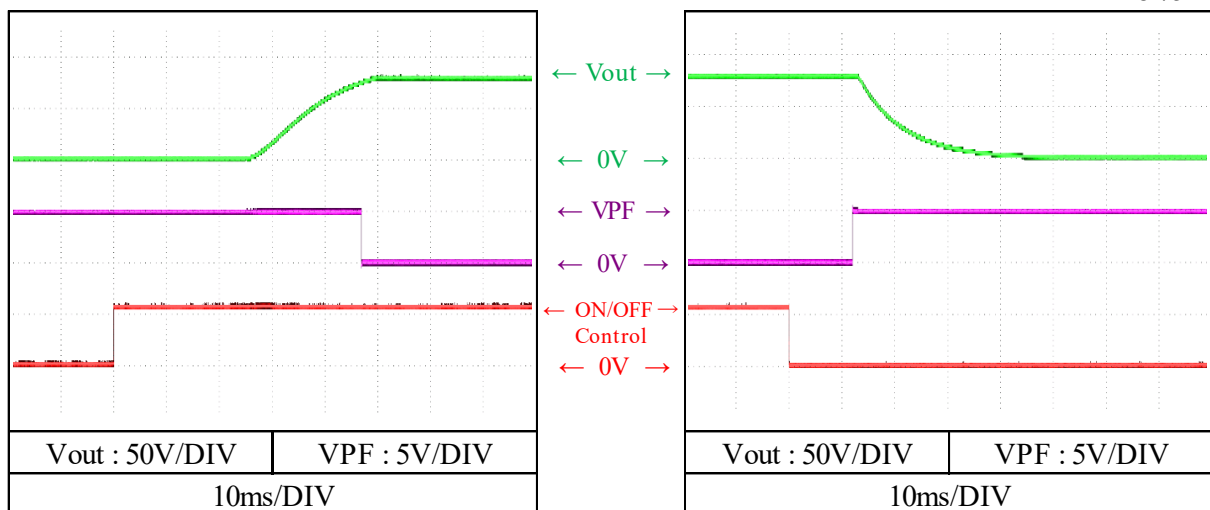


(a) リモートON/OFFコントロール端子によるON/OFF

ON/OFF control by remote ON/OFF control terminal


Conditions  $V_{in}$  : 200 VAC

$T_a$  : 25 °C

$I_{out}$  : 0A

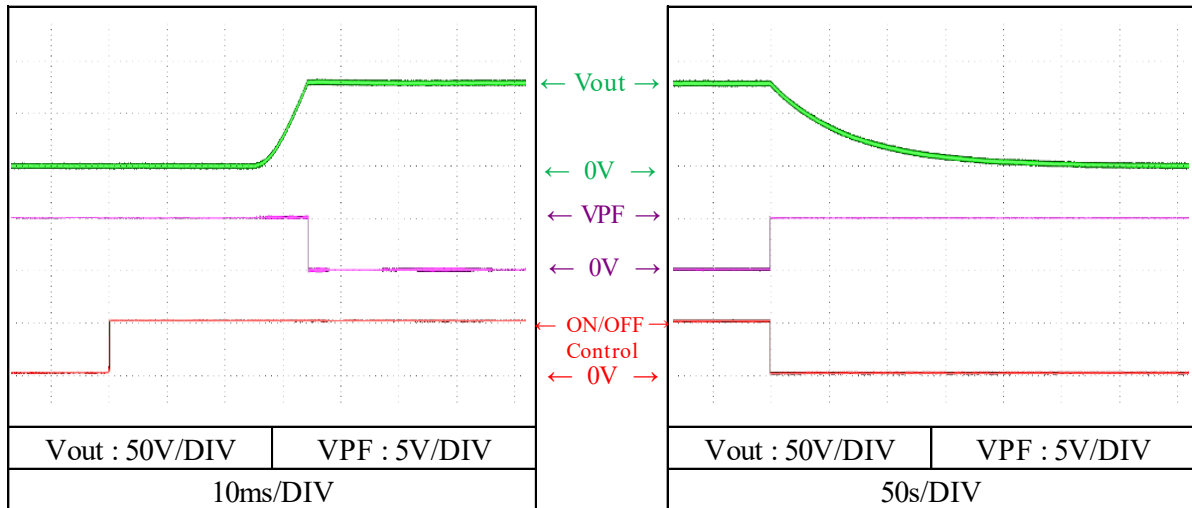

$I_{out}$  : 37.5A

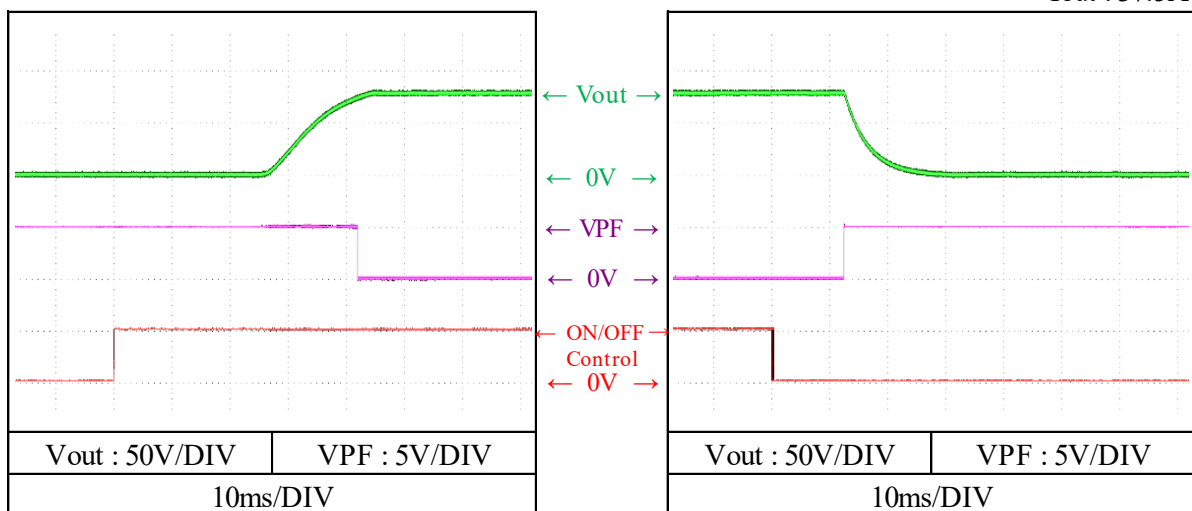



2-1-6. ON/OFFコントロール時出力立ち上がり、立ち下がり特性

Output rise, fall characteristics with ON/OFF Control

(b) RS-485通信によるON/OFF ON/OFF control by RS-485

Conditions  $V_{in}$  : 100 VAC

$T_a$  : 25 °C

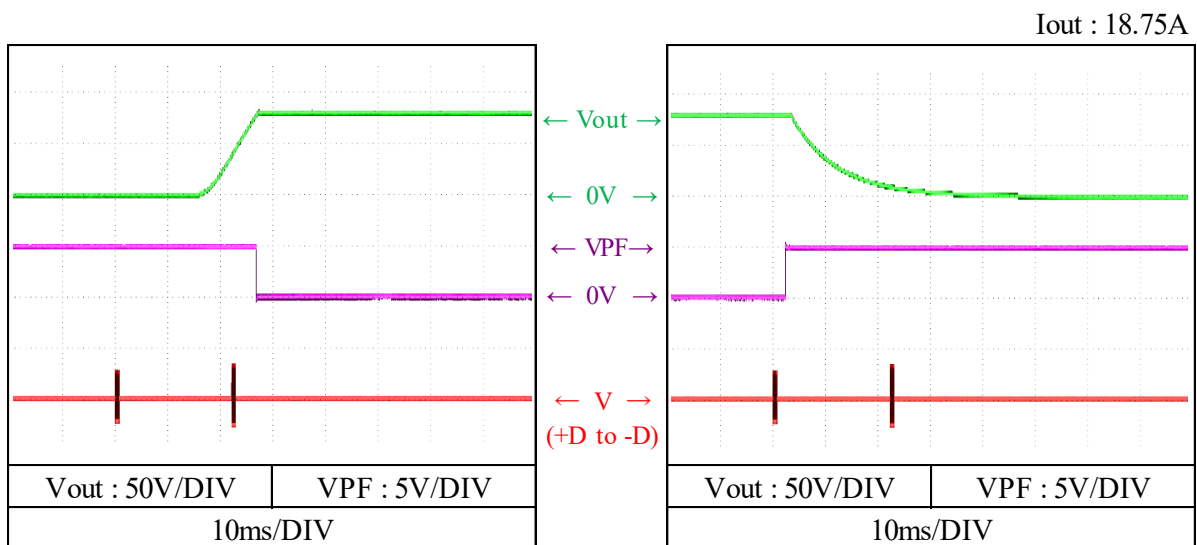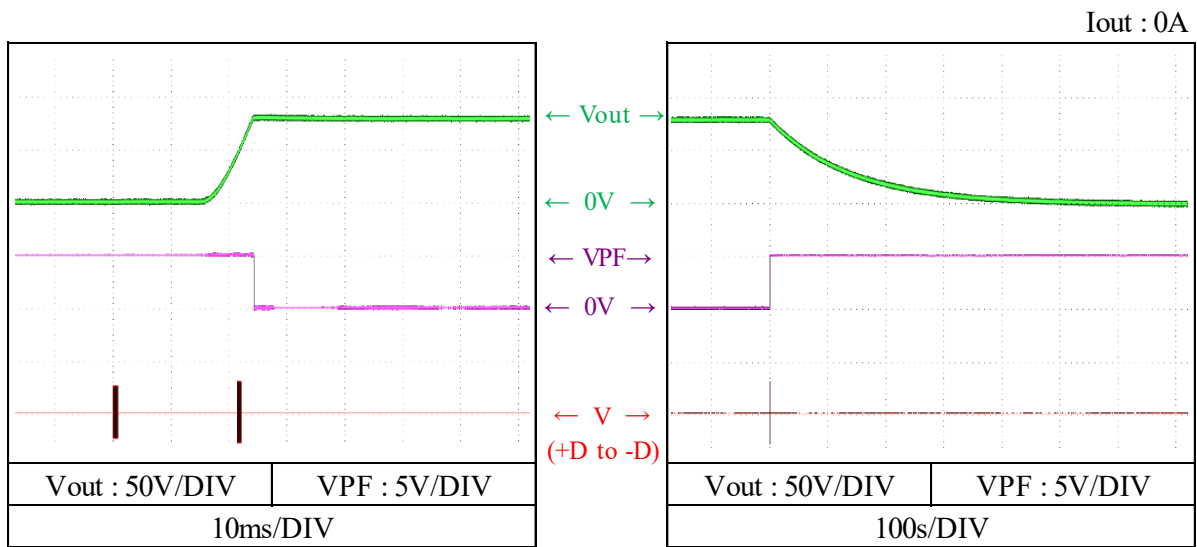


(b) RS-485通信によるON/OFF ON/OFF control by RS-485


Conditions  $V_{in}$  : 200 VAC

$T_a$  : 25 °C

$I_{out}$  : 0A

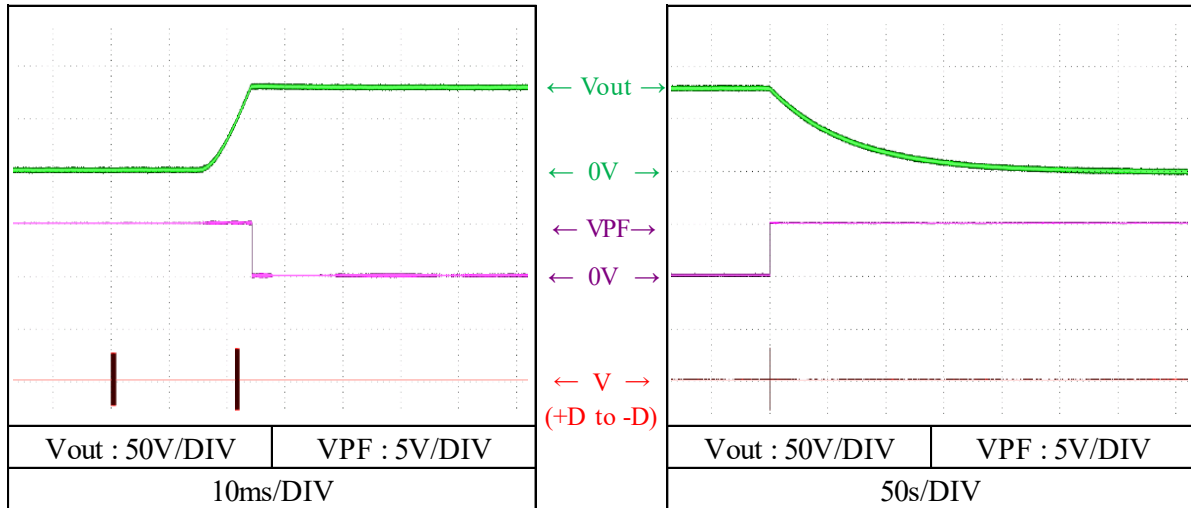


$I_{out}$  : 37.5A

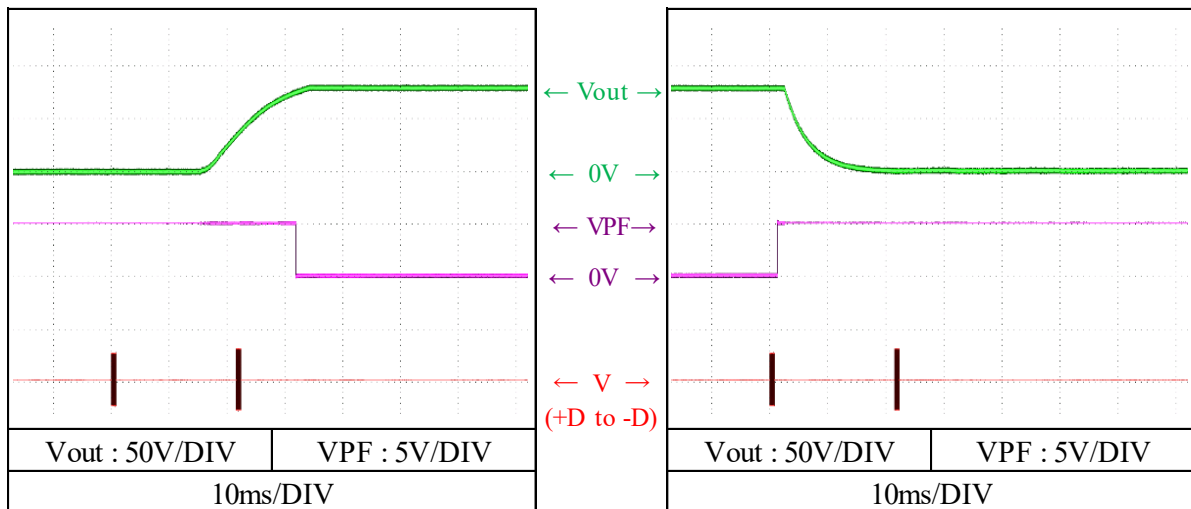


## 2-1-7. 過渡応答 (負荷急変) 特性 Dynamic load response characteristics

Conditions  $V_{in}$  : 100 VAC  
 $I_{out}$  : 9.38A  $\leftrightarrow$  18.75A  
 ( $t_r = t_f = 50\mu s$ )  
 $T_a$  : 25 °C

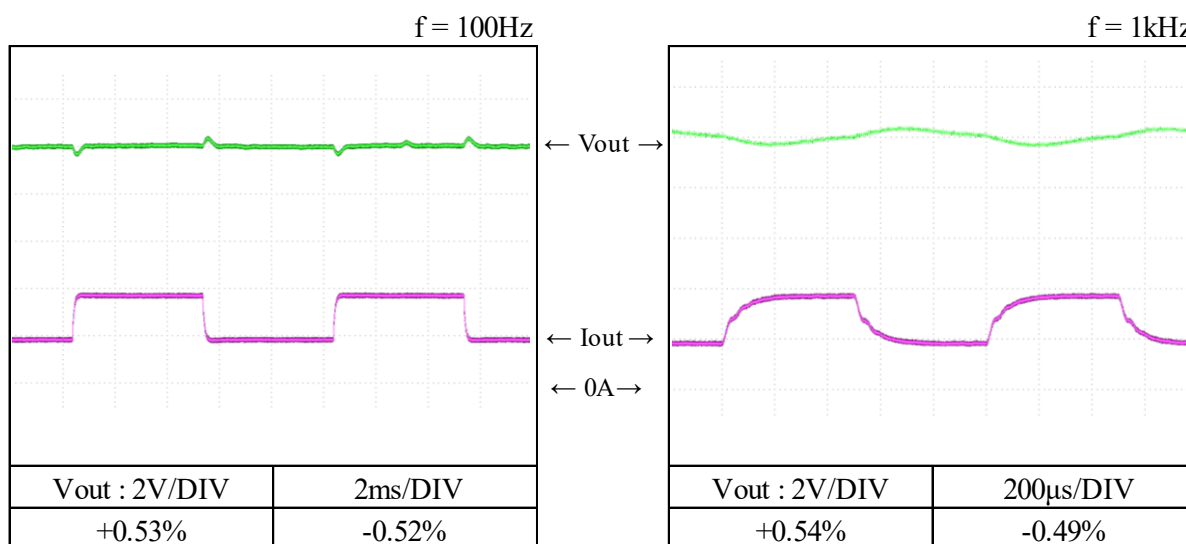

Conditions  $V_{in}$  : 200 VAC  
 $I_{out}$  : 18.75A  $\leftrightarrow$  37.5A  
 ( $t_r = t_f = 50\mu s$ )  
 $T_a$  : 25 °C

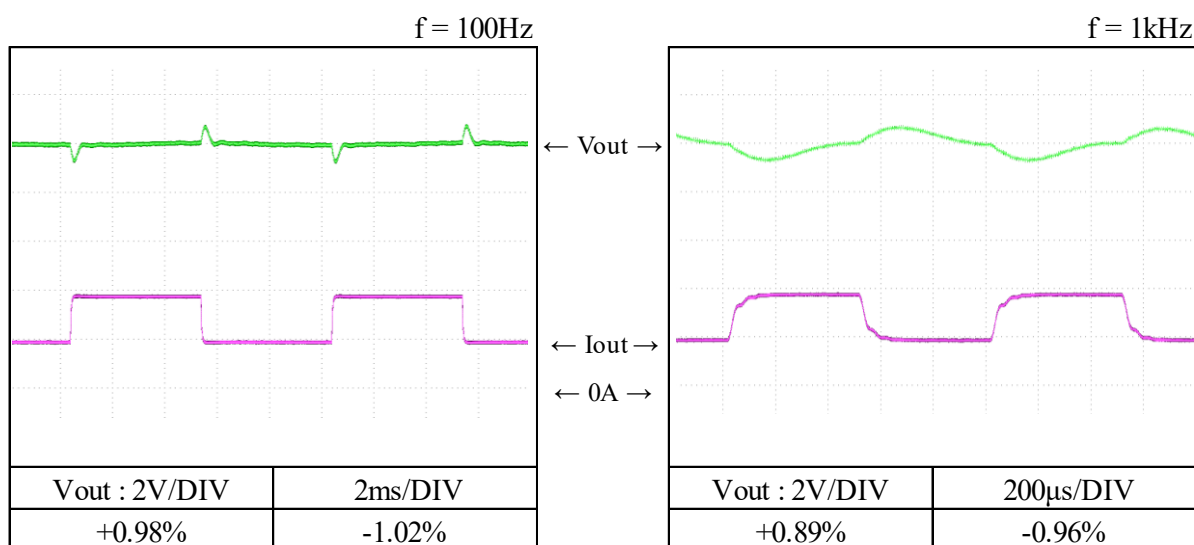

2-1-8. 入力電圧瞬停特性 Response to brown out characteristics

瞬停時間 Interruption time

A: 出力電圧の低下なし Output voltage does not drop.


B: 出力電圧の低下が0Vまでいかない Output voltage drop down not reaching 0V.

C: 出力電圧が0Vまで低下 Output voltage drops until 0V.


Conditions  $V_{in}$  : 100VAC  
 $I_{out}$  : 18.75 A  
 $T_a$  : 25 °C

Conditions  $V_{in}$  : 200VAC  
 $I_{out}$  : 37.5 A  
 $T_a$  : 25 °C

A = 26ms, C = 27ms

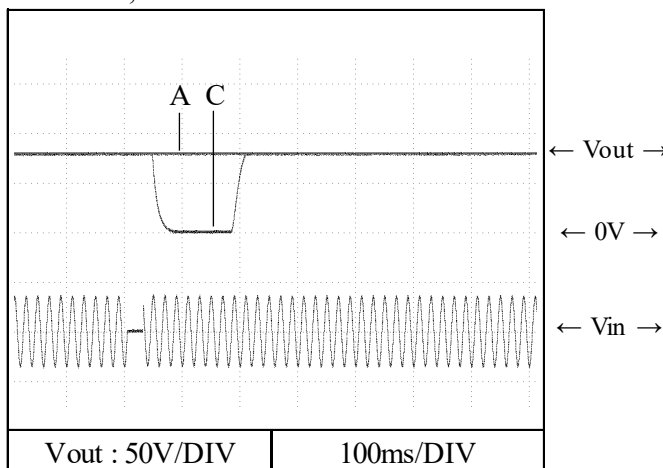



A = 13ms, C = 14ms

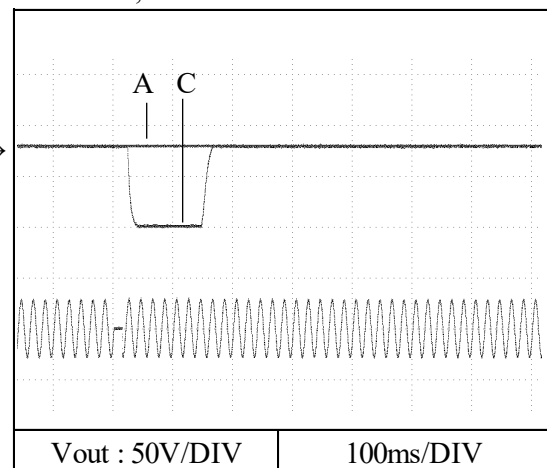

2-1-9. 出力リップル、ノイズ波形 Output ripple and noise waveform

Conditions  $V_{in}$  : 100VAC  
 $V_{out}$  : 80 V  
 $I_{out}$  : 18.75 A  
 $T_a$  : 25 °C

Conditions  $V_{in}$  : 200VAC  
 $V_{out}$  : 80 V  
 $I_{out}$  : 37.5 A  
 $T_a$  : 25 °C

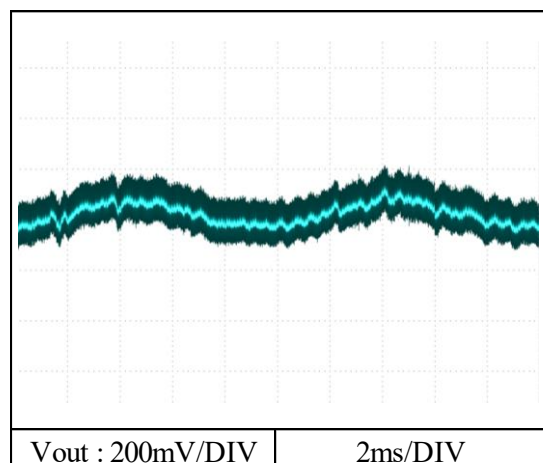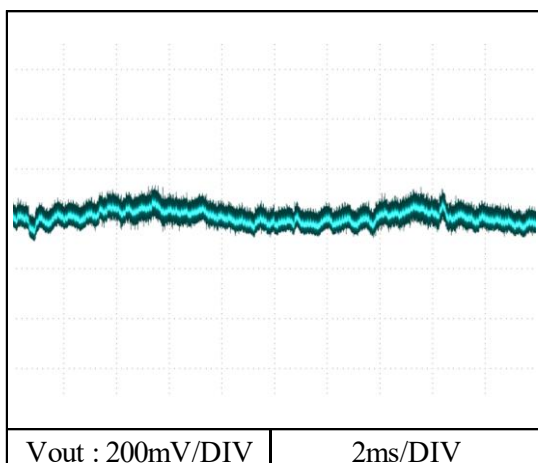

## 2-2. 定電流出力モード Constant current output mode

## 2-2-1. 静特性 Steady state data

## (1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift

## 1. Regulation - line and load

Condition Ta : 25 °C

Vout \ Vin	85VAC	100VAC	115VAC	132VAC	Line regulation	
8V	18.82A	18.82A	18.82A	18.82A	9mA	0.048%
40V	18.83A	18.83A	18.82A	18.82A	7mA	0.037%
80V	18.73A	18.74A	18.74A	18.74A	6mA	0.032%
Load regulation	92mA	87mA	88mA	88mA		
	0.491%	0.464%	0.469%	0.469%		

Vout \ Vin	170VAC	200VAC	230VAC	265VAC	Line regulation	
8V	37.70A	37.70A	37.70A	37.70A	4mA	0.011%
40V	37.69A	37.70A	37.70A	37.70A	8mA	0.021%
80V	37.57A	37.58A	37.58A	37.57A	10mA	0.027%
Load regulation	131mA	118mA	119mA	131mA		
	0.349%	0.315%	0.317%	0.349%		

## 2. Temperature drift

Conditions Vin : 100 VAC

Vout : 80 V

Ta	-20°C	+25°C	+50°C	Temperature stability	
Iout	18.76A	18.74A	18.72A	40mA	0.213%


Conditions Vin : 200 VAC

Vout : 80 V


Ta	-20°C	+25°C	+50°C	Temperature stability	
Iout	37.63A	37.58A	37.53A	105mA	0.280%

(2) リップルノイズ電流対出力電圧 Ripple noise current vs. Output voltage

Conditions       $V_{in}$  : 100 VAC  
 $I_{out}$  : 18.75 A  
 $T_a$  : -20 °C ---  
           25 °C -.-  
           50 °C —

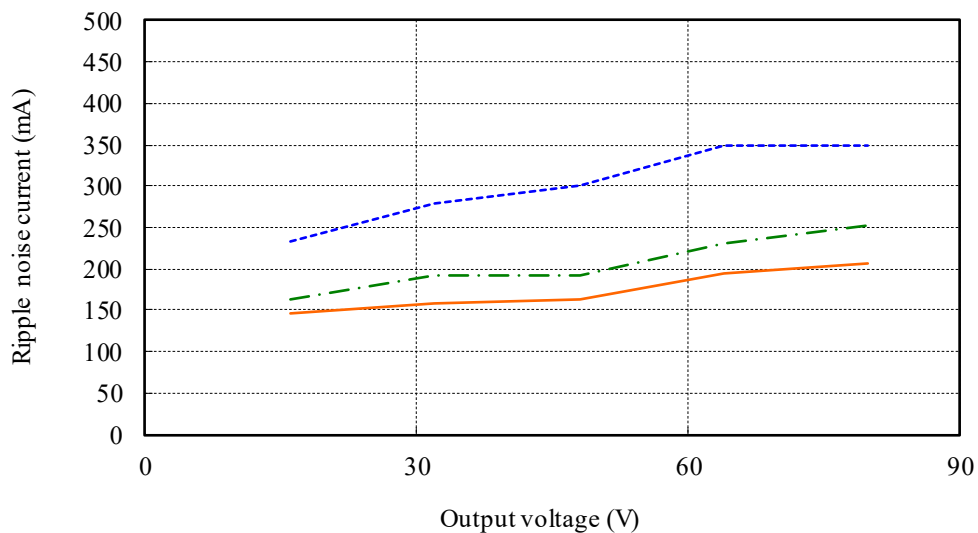

Conditions       $V_{in}$  : 200 VAC  
 $I_{out}$  : 37.5 A  
 $T_a$  : -20 °C ---  
           25 °C -.-  
           50 °C —

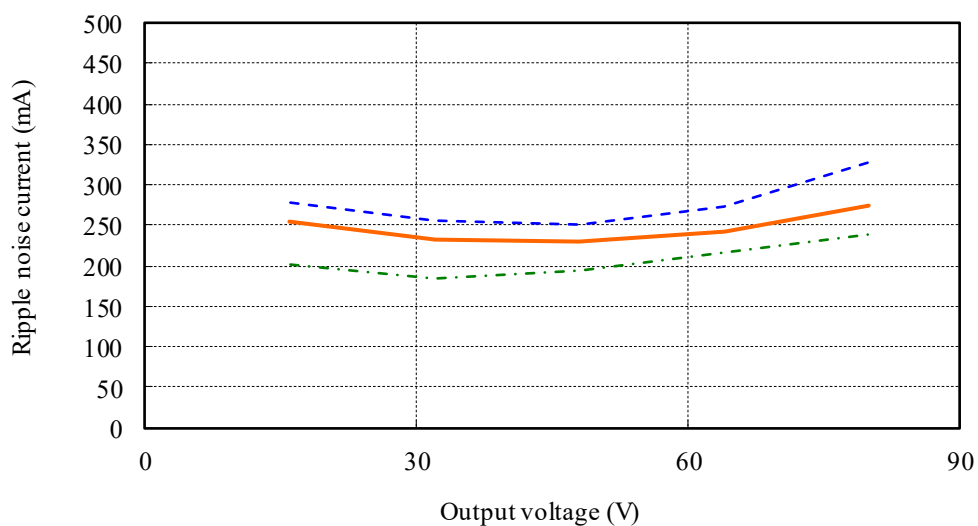




(4) 入力電力対出力電圧 Input power vs. Output voltage


Conditions Vin : 100 VAC ---  
 115 VAC - - -  
 Iout : 18.75 A  
 Iaux : 0 %  
 Ta : 25 °C

Vin	Input power
	Control OFF
100VAC	8.9W
115VAC	8.3W

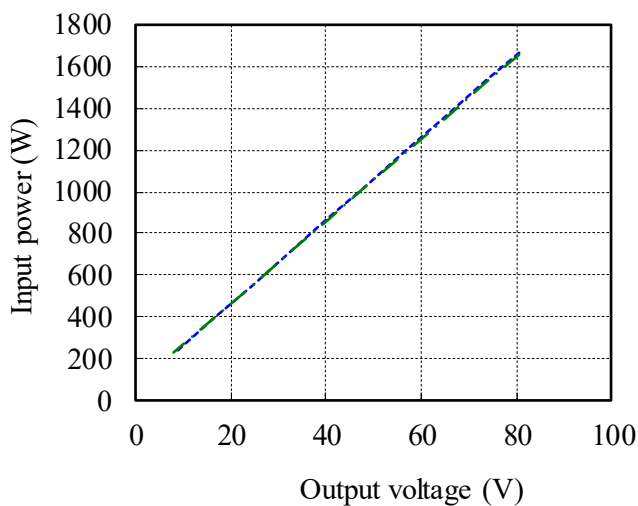

Conditions Vin : 200 VAC —  
 230 VAC - · -  
 Iout : 37.5 A  
 Iaux : 0 %  
 Ta : 25 °C


Vin	Input power
	Control OFF
200VAC	7.2W
230VAC	7.3W

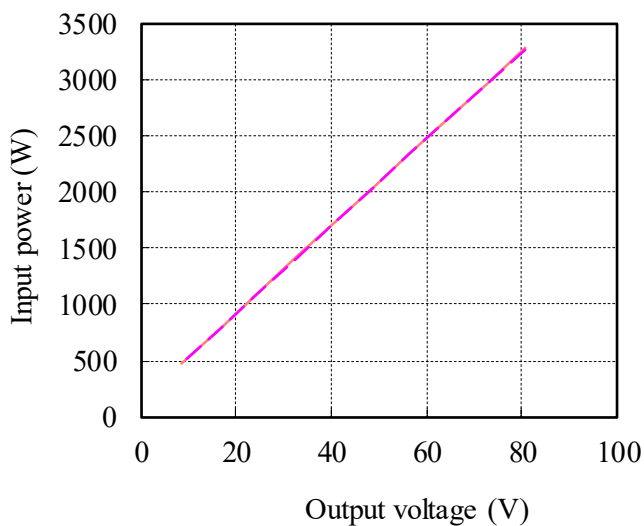




## 2-2-2. 通電ドリフト特性 Warm up current drift characteristics

Conditions       $V_{in}$  : 100 VAC  
                     $V_{out}$  : 80 V  
                     $I_{out}$  : 18.75 A  
                     $T_a$  : 25 °C

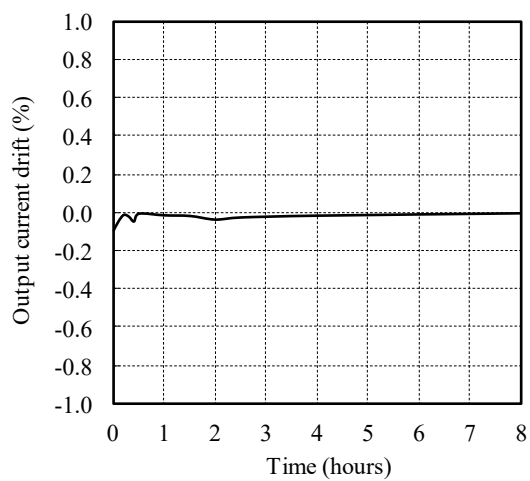


Conditions       $V_{in}$  : 200 VAC  
                     $V_{out}$  : 80 V  
                     $I_{out}$  : 37.5 A  
                     $T_a$  : 25 °C

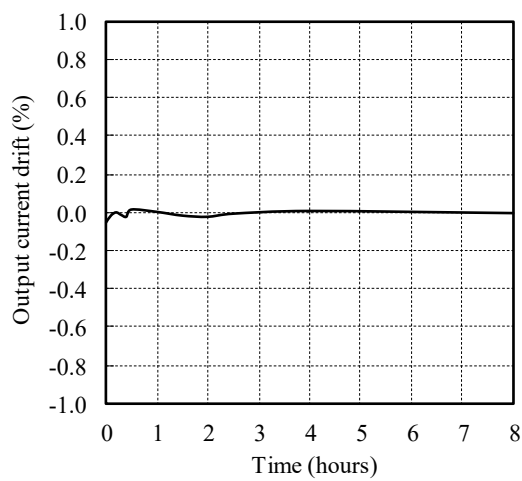


2-2-3. 出力電流立ち上がり特性 Output current rise characteristics

Conditions  $V_{in}$  : 100 VAC (A)  
 115 VAC (B)  
 $I_{aux}$  : 100 %  
 $T_a$  : 25 °C

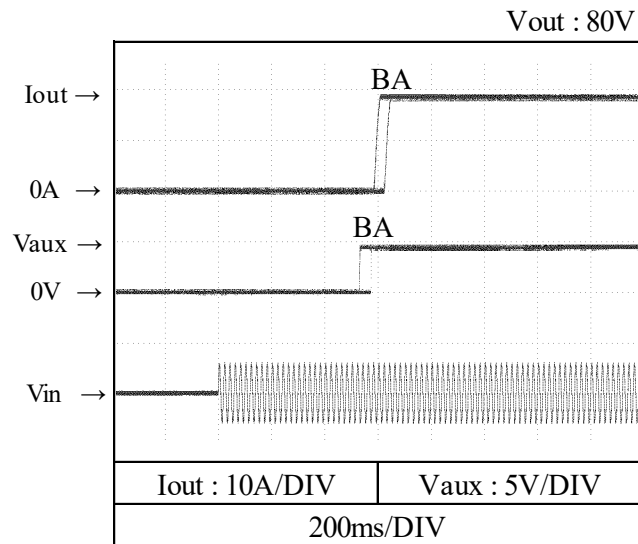

Conditions  $V_{in}$  : 200 VAC (C)  
 230 VAC (D)  
 $I_{aux}$  : 100 %  
 $T_a$  : 25 °C

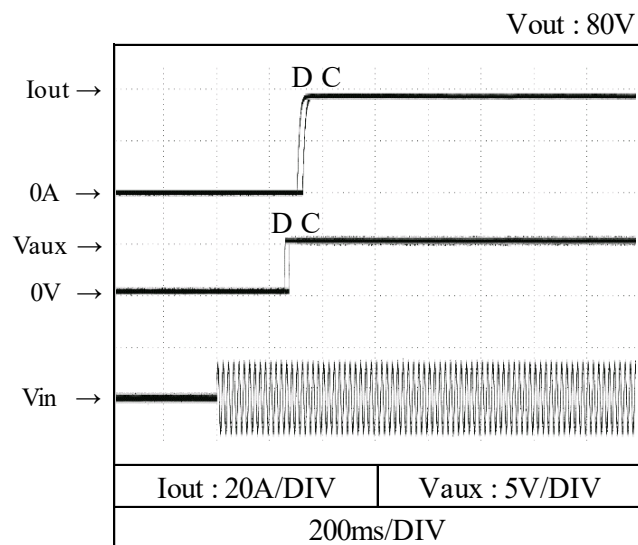


2-2-4. 出力電流立ち下がり特性 Output current fall characteristics

Conditions  $V_{in}$  : 100 VAC (A)

115 VAC (B)

$I_{aux}$  : 100 %

$T_a$  : 25 °C

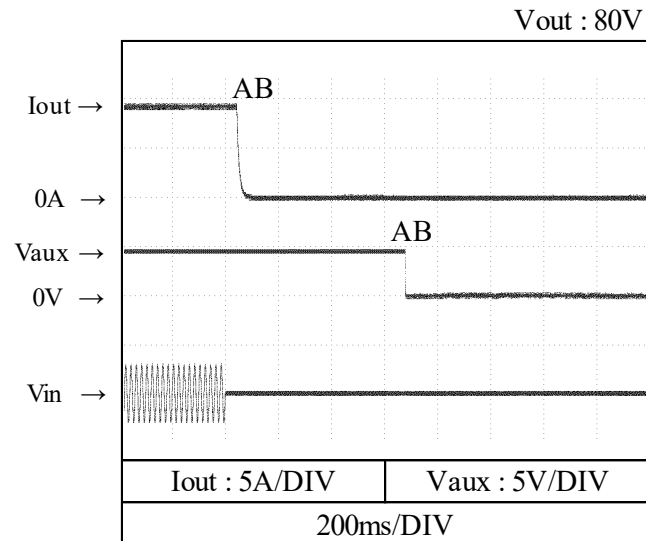


Conditions  $V_{in}$  : 200 VAC (C)

230 VAC (D)

$I_{aux}$  : 100 %

$T_a$  : 25 °C

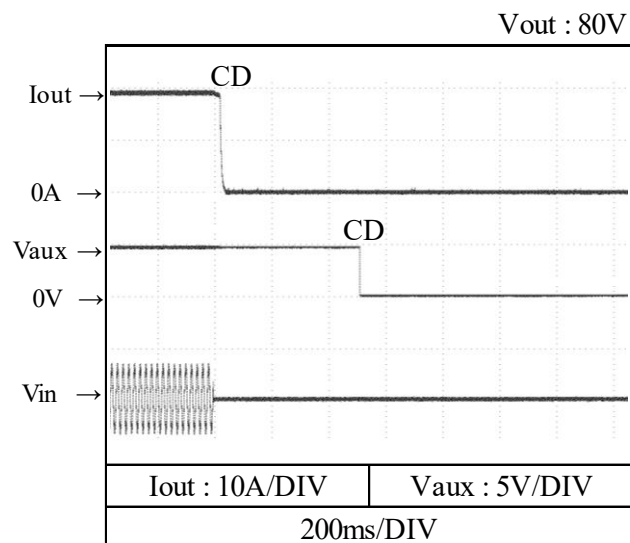

2-2-5. ON/OFFコントロール時出力立ち上がり、立ち下がり特性

Output rise, fall characteristics with ON/OFF Control



(a) リモートON/OFFコントロール端子によるON/OFF

ON/OFF control by remote ON/OFF control terminal

Conditions  $V_{in}$  : 100 VAC

$V_{out}$  : 80 V

$T_a$  : 25 °C

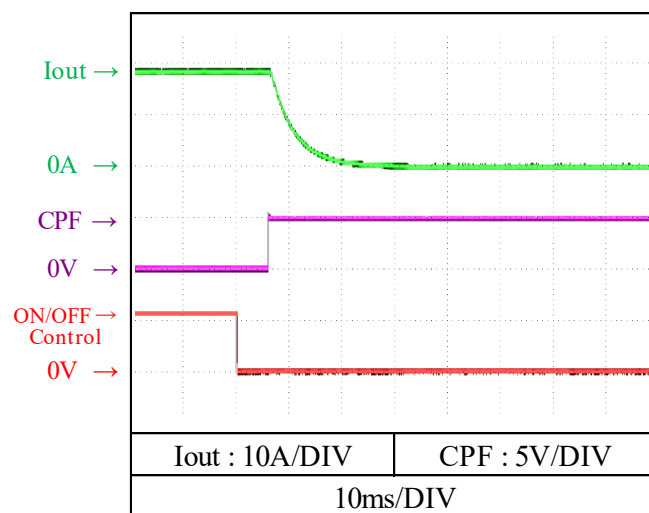
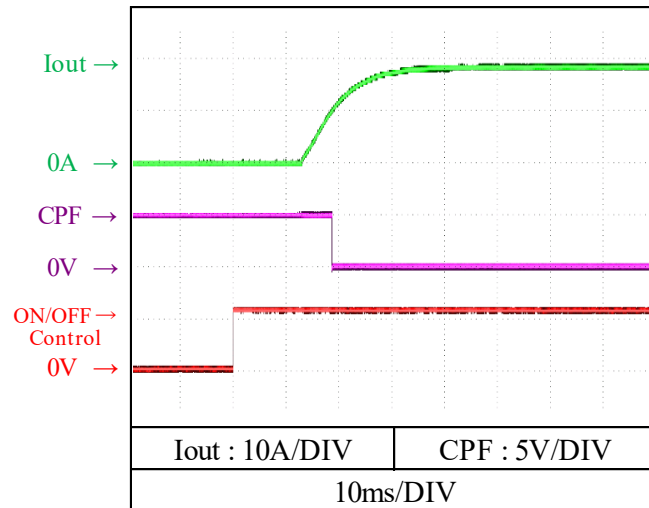


(a) リモートON/OFFコントロール端子によるON/OFF  
ON/OFF control by remote ON/OFF control terminal

Conditions  $V_{in}$  : 200 VAC

$V_{out}$  : 80 V

$T_a$  : 25 °C

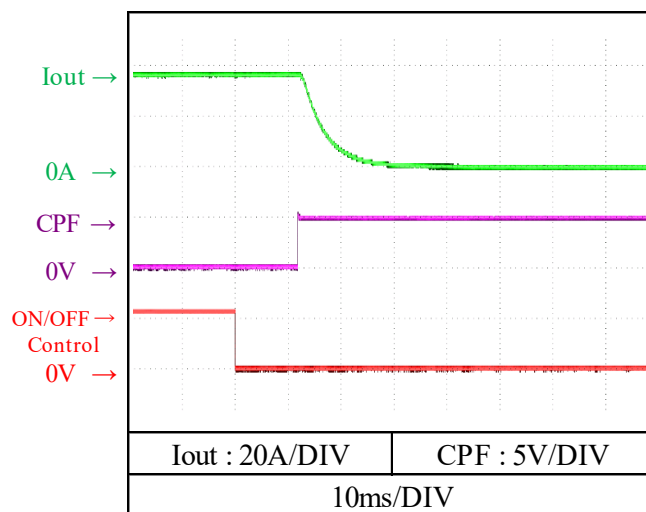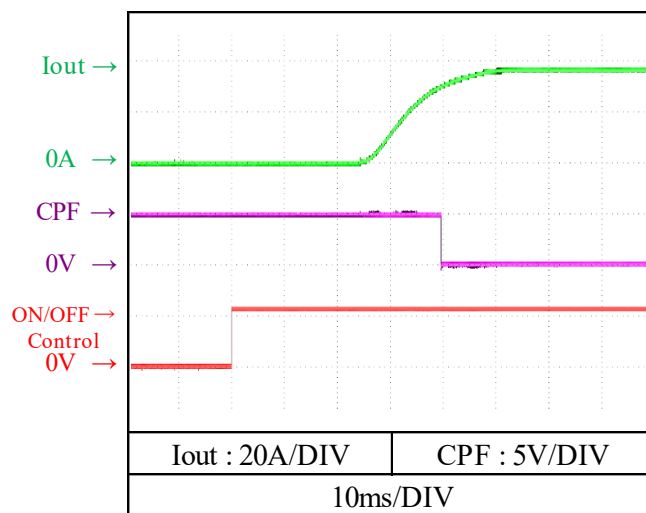

2-2-5. ON/OFFコントロール時出力立ち上がり、立ち下がり特性



Output rise, fall characteristics with ON/OFF Control

(b) RS-485通信によるON/OFF ON/OFF control by RS-485

Conditions  $V_{in}$  : 100 VAC

$V_{out}$  : 80 V

$T_a$  : 25 °C

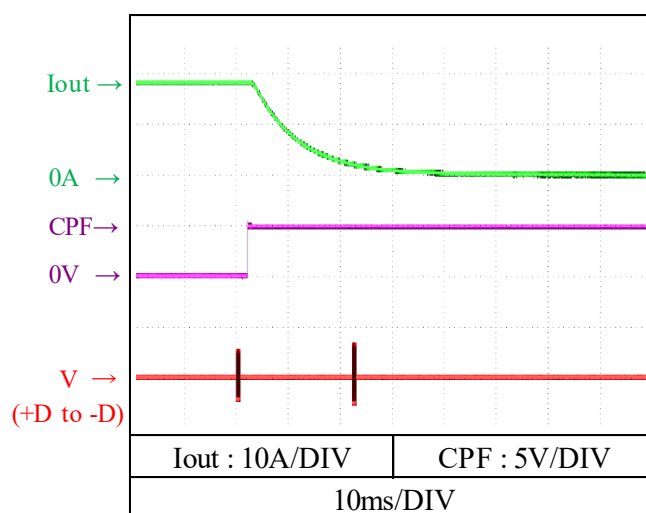
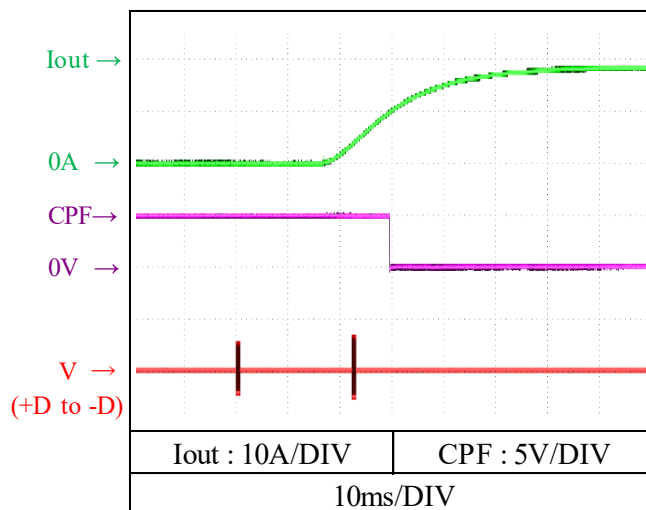


(b) RS-485通信によるON/OFF ON/OFF control by RS-485

Conditions  $V_{in}$  : 200 VAC

$V_{out}$  : 80 V

$T_a$  : 25 °C

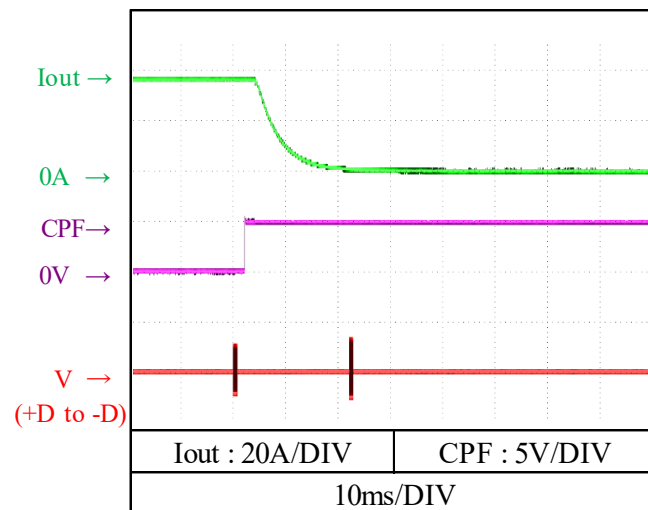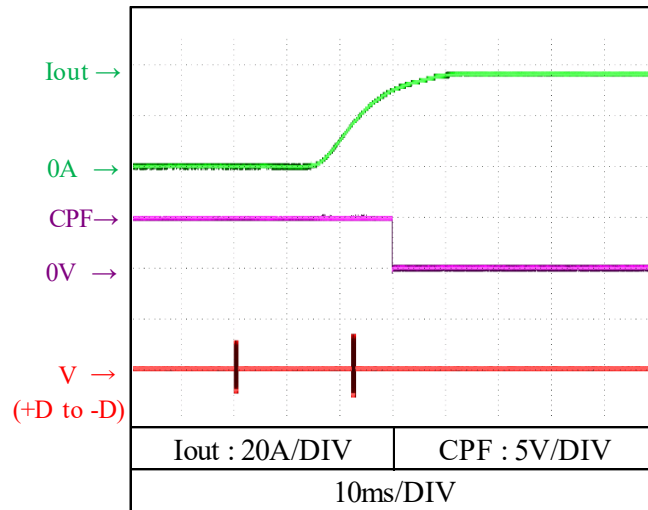

## 2-2-6. 入力電圧瞬停特性 Response to brown out characteristics

### 瞬停時間 Interruption time

A: 出力電圧の低下なし Output voltage does not drop.

B: 出力電圧の低下が0Vまでいかない Output voltage drop down not reaching 0V.

C: 出力電圧が0Vまで低下 Output voltage drops until 0V.

Conditions  $V_{in}$  : 100VAC

$V_{out}$  : 80 V


$T_a$  : 25 °C

Conditions  $V_{in}$  : 200VAC


$V_{out}$  : 80 V

$T_a$  : 25 °C

A = 26ms, C = 27ms

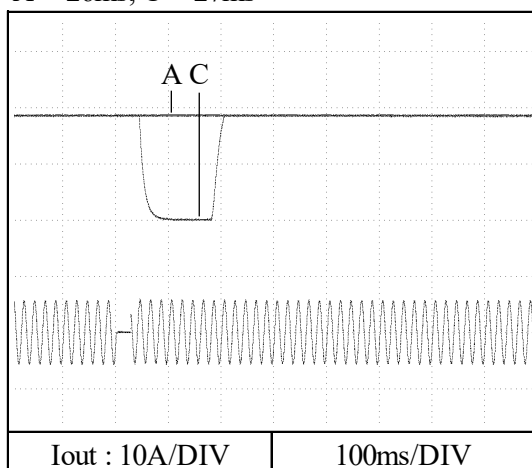

A = 13ms, C = 14ms

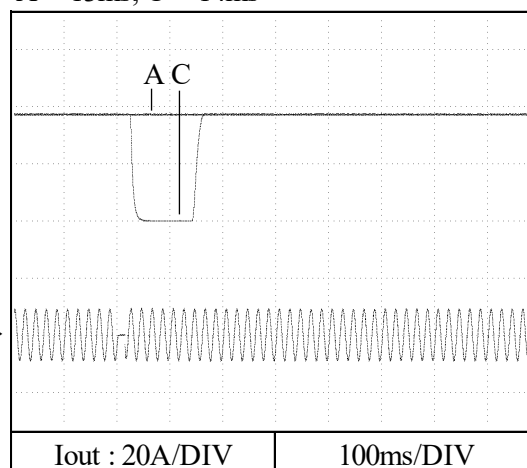

## 2-2-7. 出力リップル、ノイズ波形 Output ripple and noise waveform

Conditions  $V_{in}$  : 100VAC

$V_{out}$  : 80 V

$I_{out}$  : 18.75 A



$T_a$  : 25 °C

Conditions  $V_{in}$  : 200VAC

$V_{out}$  : 80 V

$I_{out}$  : 37.5 A

$T_a$  : 25 °C

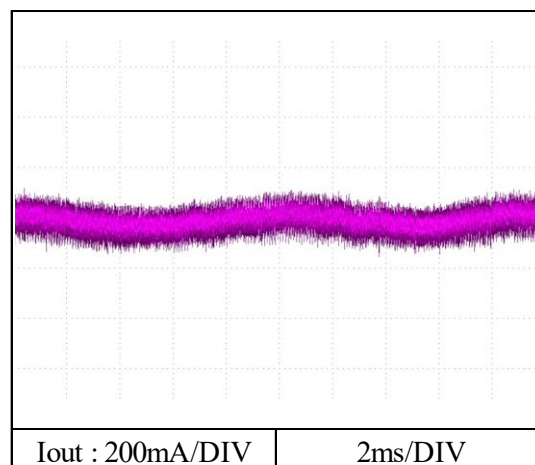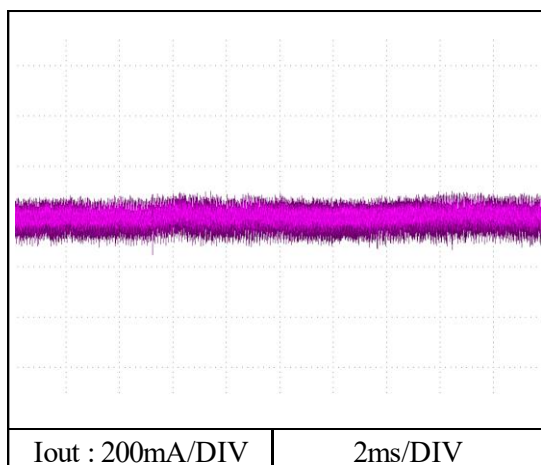


2-3. 過電流保護特性 Over current protection (OCP) characteristics

Conditions  $V_{in}$  : 100 VAC

$T_a$  : -20 °C - - - -

25 °C - - - -

50 °C - · - · -

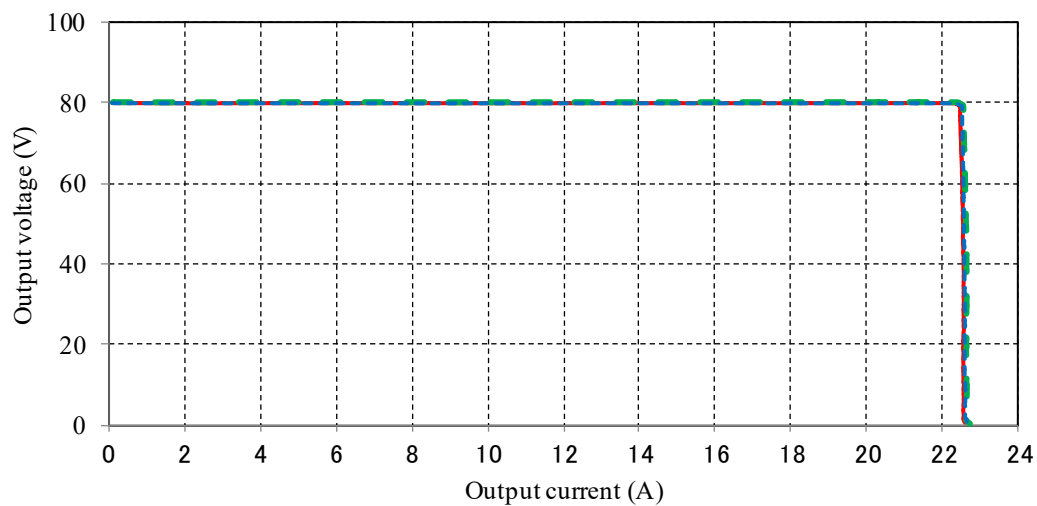


Conditions  $V_{in}$  : 200 VAC

$T_a$  : -20 °C - - - -


25 °C - - - -

50 °C - · - · -

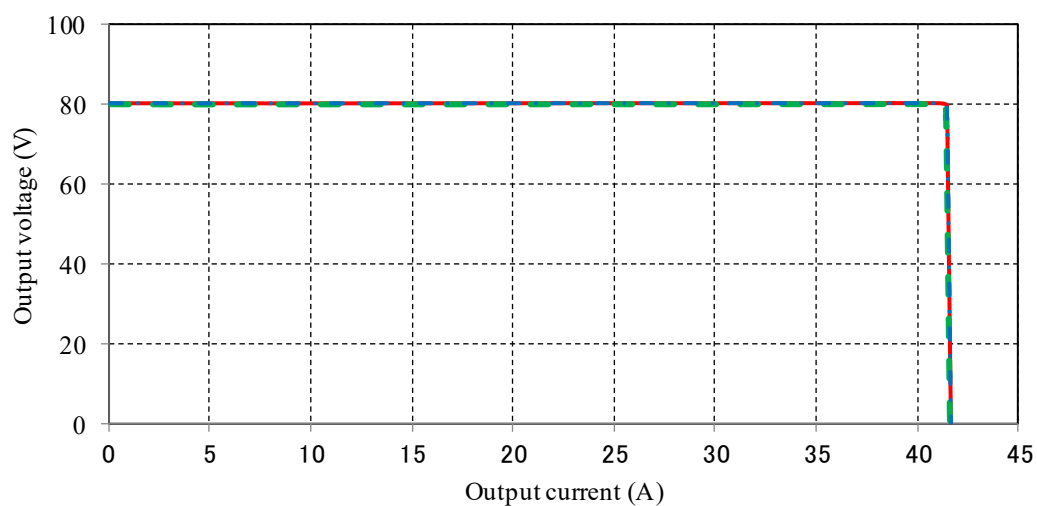

2-4. 過電圧保護特性 Over voltage protection (OVP) characteristics

Conditions Vin : 100 VAC  
Iout : 1 A  
Ta : 25 °C

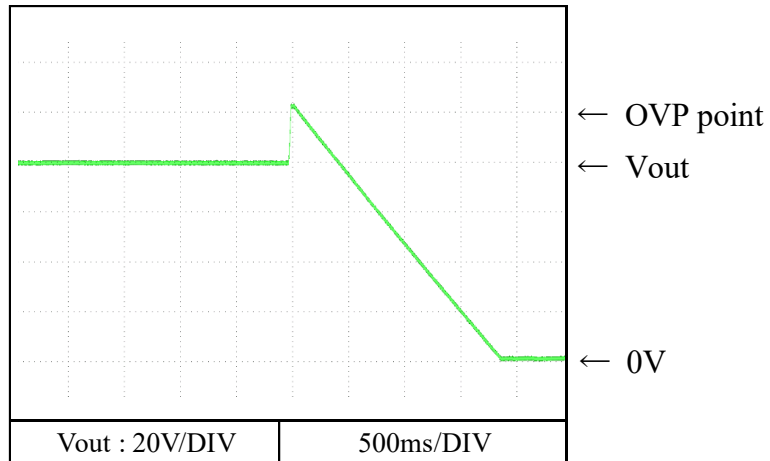

2-5. 入力サージ電流（突入電流）波形 Inrush current waveform


Conditions  $V_{in}$  : 100 VAC

$V_{out}$  : Nominal output voltage


$I_{out}$  : Maximum output current

$T_a$  : 25 °C

Switch on phase angle of input AC voltage  
 $\phi = 0^\circ$

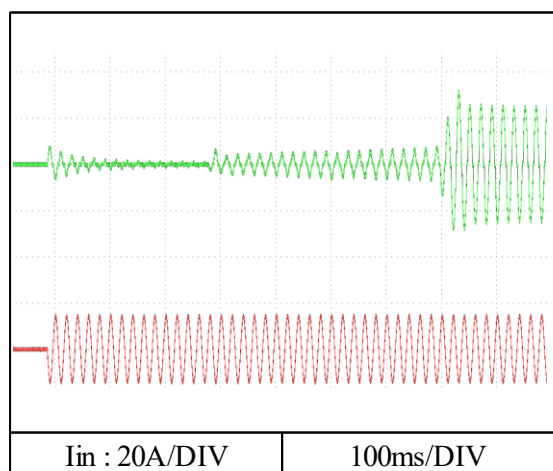

Switch on phase angle of input AC voltage  
 $\phi = 90^\circ$

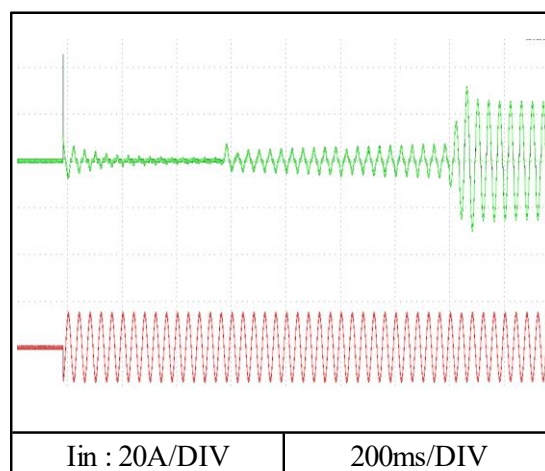


Conditions  $V_{in}$  : 200 VAC

$V_{out}$  : Nominal output voltage


$I_{out}$  : Maximum output current

$T_a$  : 25 °C

Switch on phase angle of input AC voltage  
 $\phi = 0^\circ$

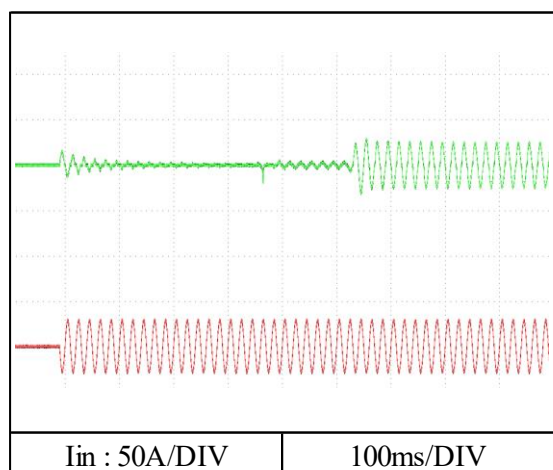


Switch on phase angle of input AC voltage  
 $\phi = 90^\circ$

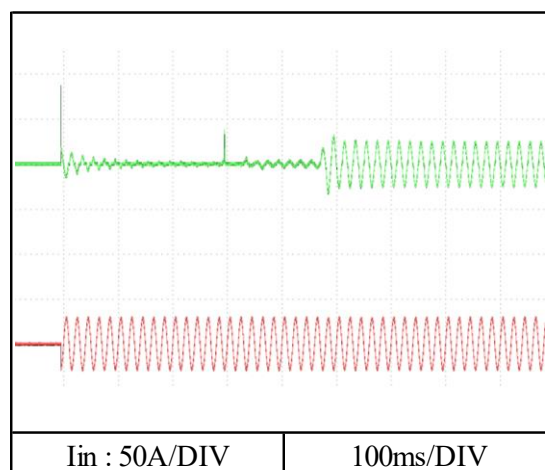


2-6. 高調波成分 Input current harmonics

Conditions Vin : 100 VAC  
 Vout : Nominal output voltage  
 Iout : Maximum output current  
 Ta : 25 °C

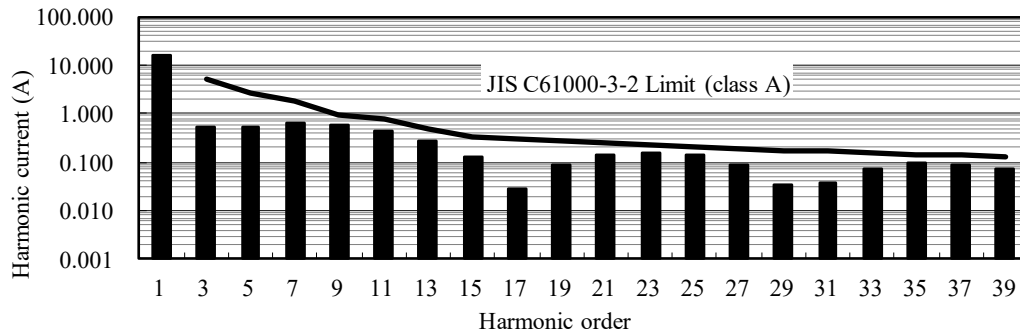



Conditions Vin : 230 VAC  
 Vout : Nominal output voltage  
 Iout : Maximum output current  
 Ta : 25 °C

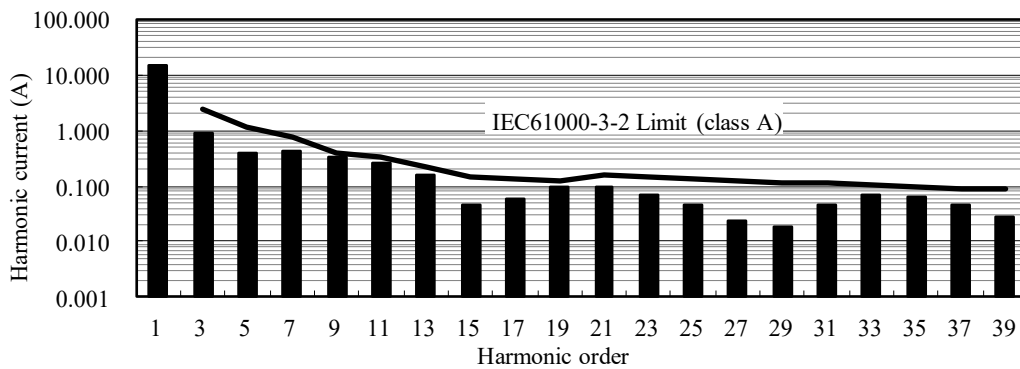





2-7. 入力電流波形 Input current waveform

Conditions Vin : 100 VAC  
 Vout : Nominal output voltage  
 Iout : Maximum output current  
 Ta : 25 °C

Conditions Vin : 230 VAC  
 Vout : Nominal output voltage  
 Iout : Maximum output current  
 Ta : 25 °C

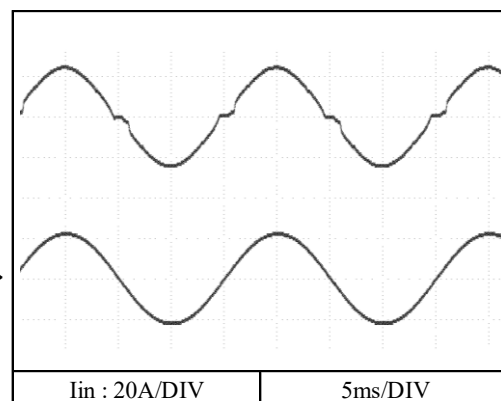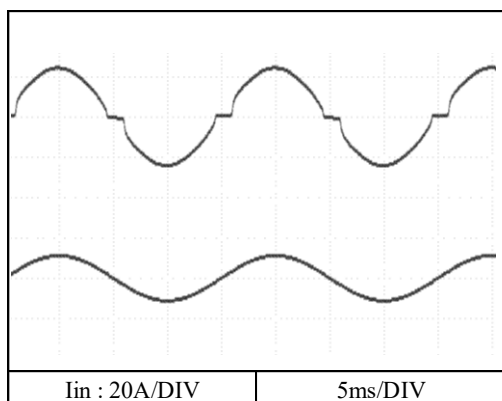

2-8. リーク電流特性 Leakage current characteristics

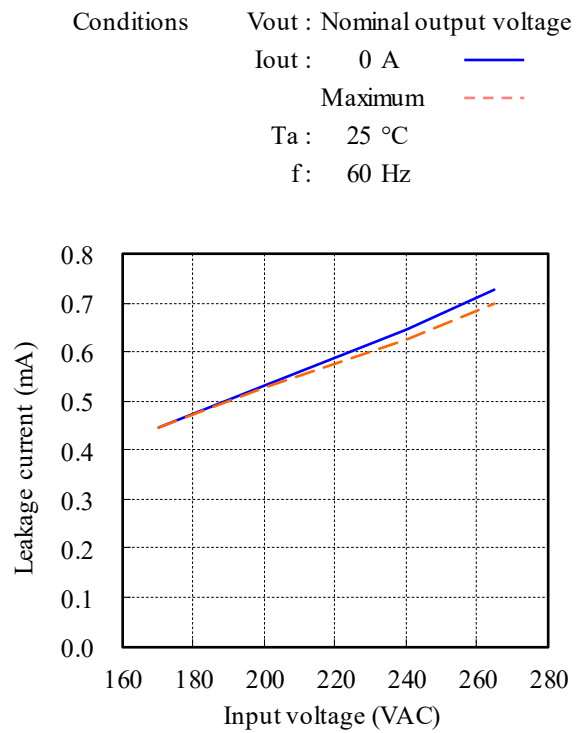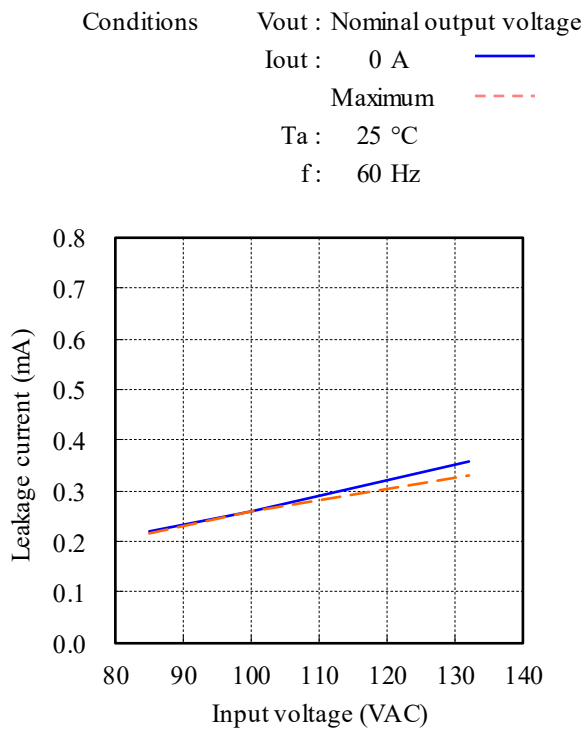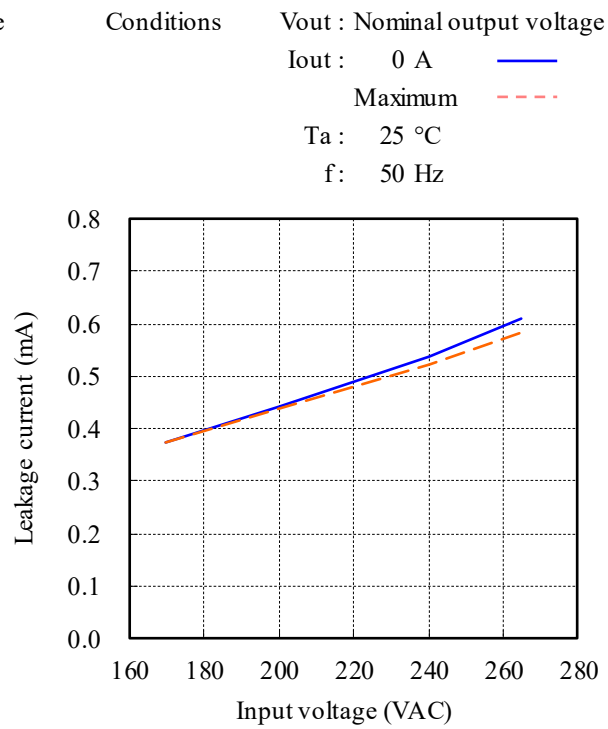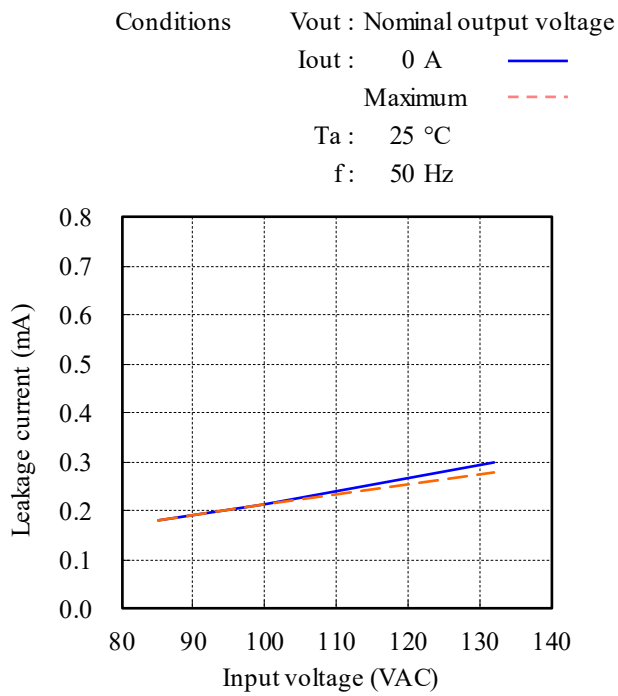

2-9. EMI特性 Electro Magnetic Interference characteristics


雑音端子電圧  
Conducted Emission

Conditions Vin : 100 VAC  
Iout : 18.75 A  
Iaux : 100 %  
Ta : 25 °C

Phase : N

Point A (0.15MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	79.0	52.5
AV	66.0	31.1


Point B (0.24MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	79.0	62.3
AV	66.0	62.1

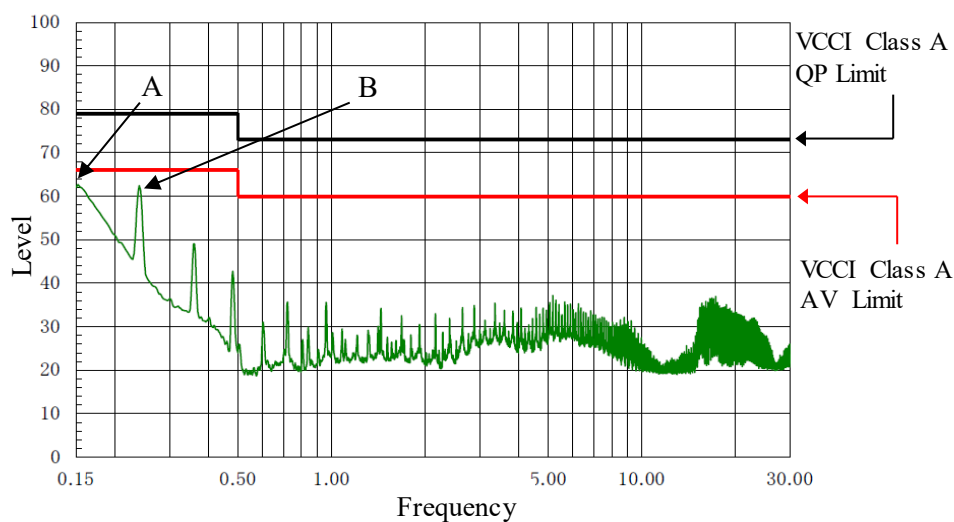

Phase : L

Point C (0.15MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	79.0	52.6
AV	66.0	27.5

Point D (0.24MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	79.0	56.9
AV	66.0	56.9

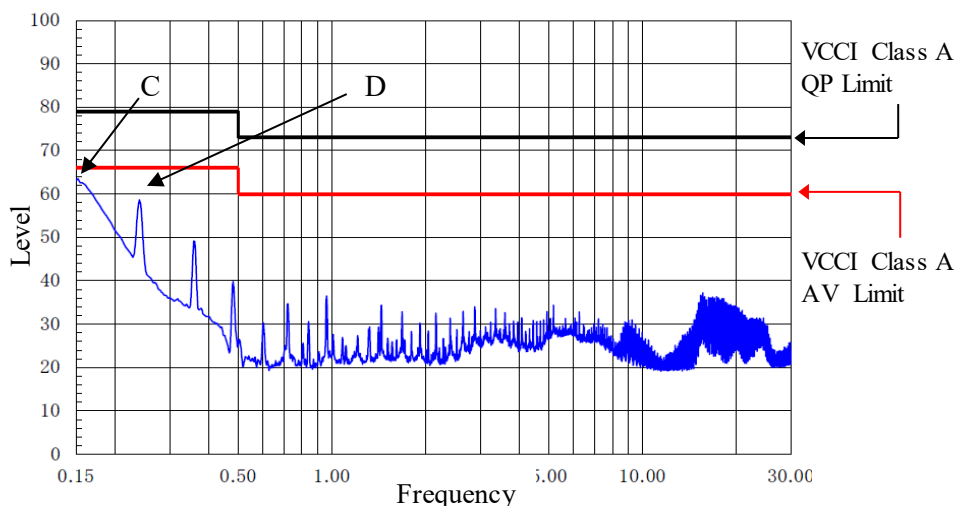

EN55011-A,EN55032-A,FCC-Aの限界値はVCCI class Aの限界値と同じ

Limit of EN55011-A,EN55032-A,FCC-A are same as its VCCI class A.

波形はピーク値

Waveform is peak values.


雑音端子電圧  
Conducted Emission

Conditions Vin : 230 VAC  
Iout : 37.5 A  
Iaux : 100 %  
Ta : 25 °C

Phase : N


Point A (0.24MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	79.0	65.0
AV	66.0	37.6

Point B (0.24MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	79.0	62.1
AV	66.0	61.9

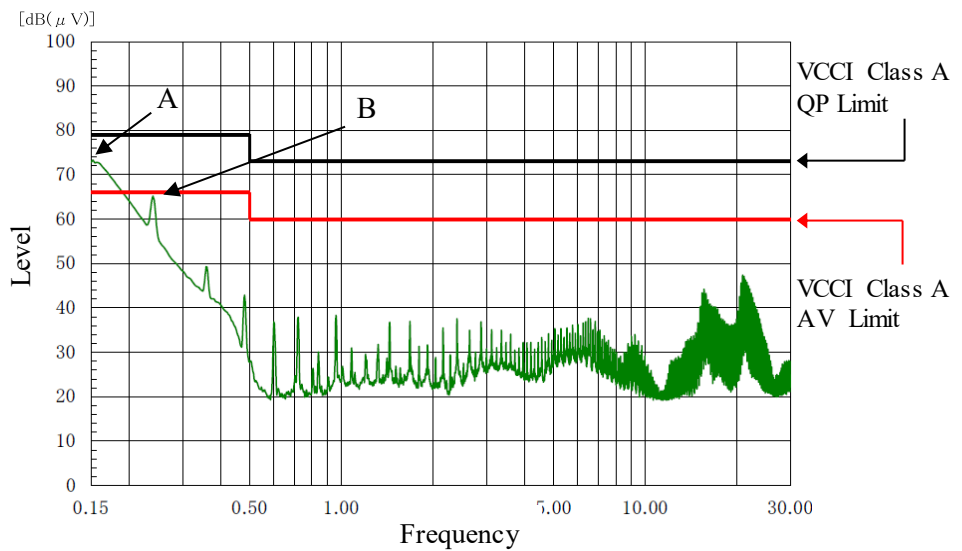

Point C (0.15MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	79.0	65.0
AV	66.0	36.5

Point D (0.24MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	79.0	58.5
AV	66.0	58.0

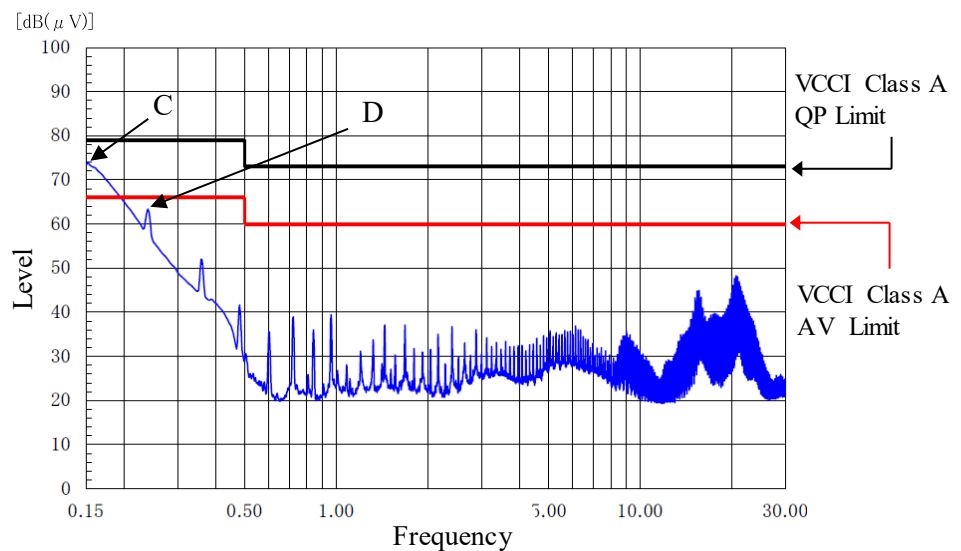

EN55011-A,EN55032-A,FCC-Aの限界値はVCCI class Aの限界値と同じ  
Limit of EN55011-A,EN55032-A,FCC-A are same as its VCCI class A.  
波形はピーク値  
Waveform is peak values.


2-9. EMI特性 Electro Magnetic Interference characteristics

雑音電界強度  
Radiated Emission

Conditions Vin : 100 VAC  
Iout : 18.75 A  
Iaux : 100 %  
Ta : 25 °C

HORIZONTAL


Point A (172.1MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	50.0	42.1

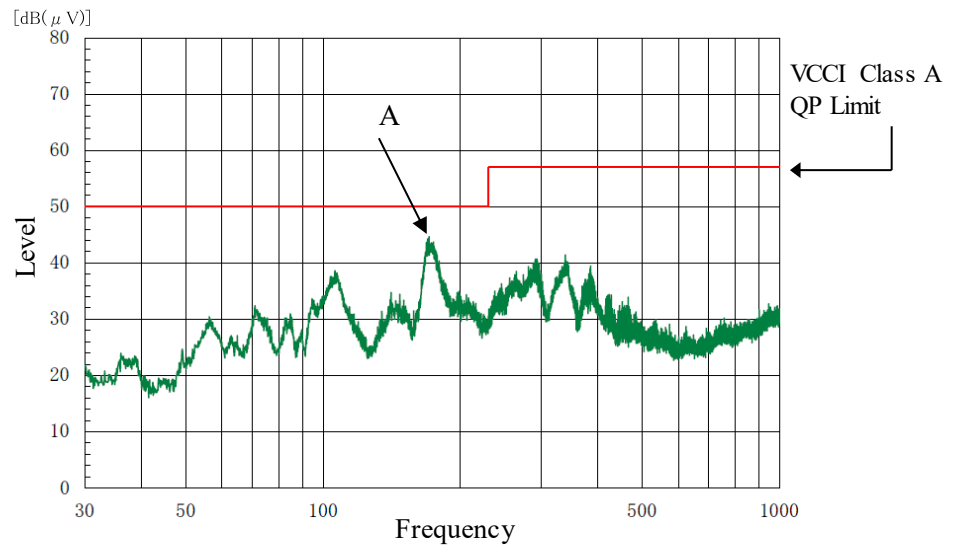

VERTICAL

Point B (169.8MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	50.0	43.9

Point C (229.3MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	50.0	41.4

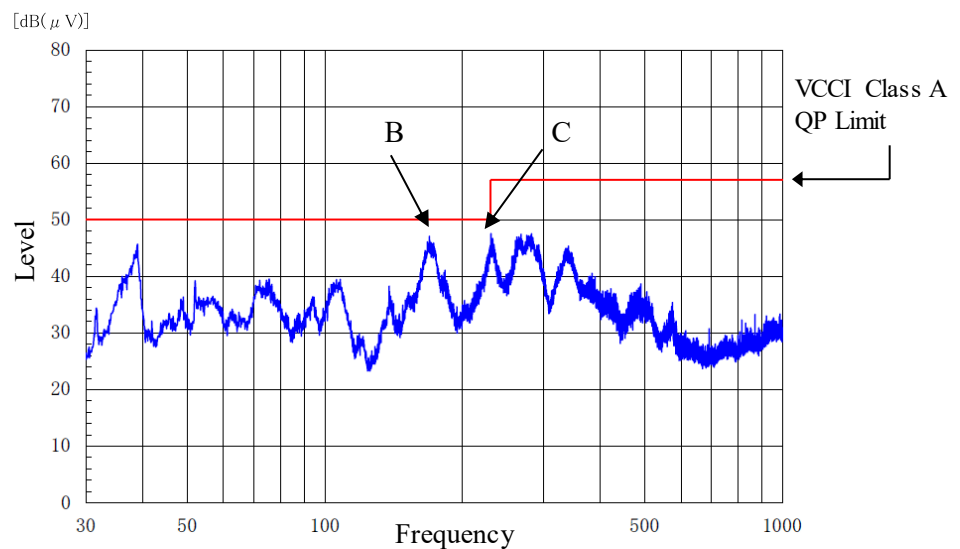

EN55011-A,EN55032-A,FCC-Aの限界値はVCCI class Aの限界値と同じ  
Limit of EN55011-A,EN55032-A,FCC-A are same as its VCCI class A.

波形はピーク値


Waveform is peak values.

雑音電界強度  
Radiated Emission

Conditions  $V_{in}$  : 230 VAC  
 $I_{out}$  : 37.5 A  
 $I_{aux}$  : 100 %  
 $T_a$  : 25 °C


HORIZONTAL

Point A (169.6MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	50.0	42.6

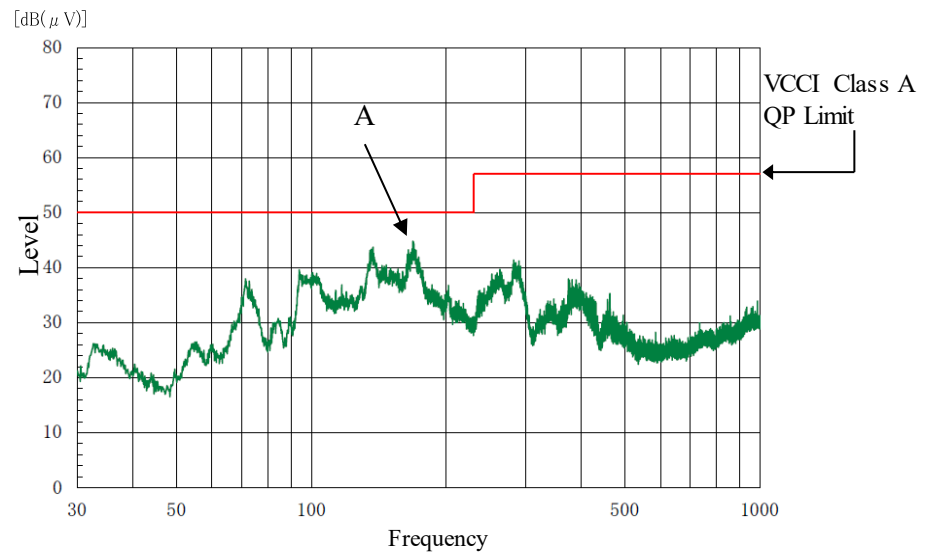

VERTICAL

Point B (136.7MHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	50.0	43.6

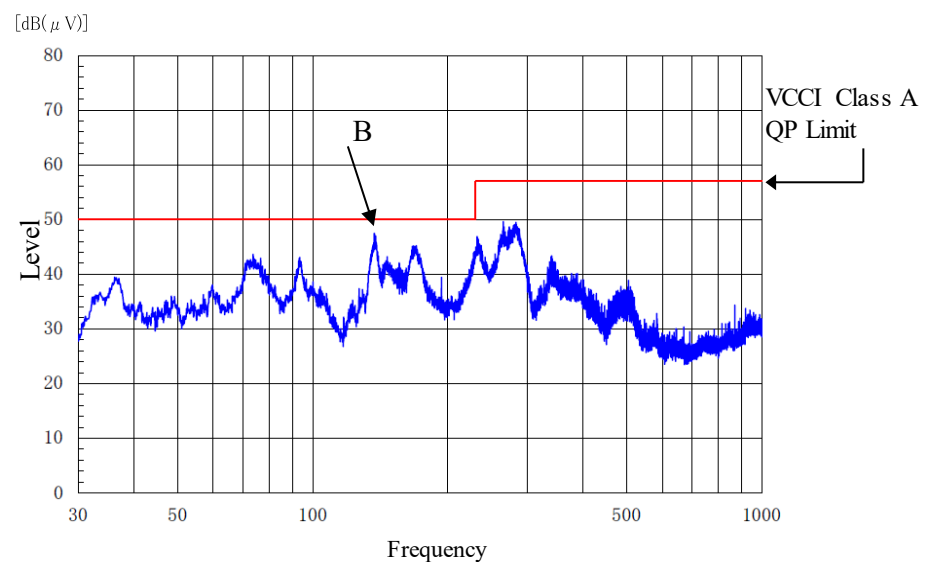

EN55011-A,EN55032-A,FCC-Aの限界値はVCCI class Aの限界値と同じ  
Limit of EN55011-A,EN55032-A,FCC-A are same as its VCCI class A.  
波形はピーク値  
Waveform is peak values.