



	<p>Test Report issued under the responsibility of:</p> <p><b>UL International Demko A/S</b></p>	
---	---	---


<p><b>TEST REPORT</b> <b>IEC 60950-1</b> <b>Information technology equipment - Safety -</b> <b>Part 1: General requirements</b></p>	
<p><b>Report Reference No</b> .....</p> <p>Date of issue .....</p> <p>Total number of pages .....</p>	<p>E252373-A11-CB-2</p> <p>2010-10-27</p> <p>64</p>
<p><b>CB Testing Laboratory</b> .....</p> <p>Address .....</p>	<p>UL International Demko A/S</p> <p>Lyskaer 8, 2730, Herlev, Denmark</p>
<p><b>Applicant's name</b> .....</p> <p>Address .....</p>	<p>TDK-LAMBDA SINGAPORE PTE LTD</p> <p>#06-01/08</p> <p>1008 TOA PAYOH NORTH</p> <p>SINGAPORE 318996 SINGAPORE</p>
<p><b>Test specification:</b></p> <p>Standard .....</p> <p>Test procedure .....</p> <p>Non-standard test method .....</p>	<p>IEC 60950-1:2005 (Second Edition)</p> <p>CB Scheme</p> <p>N/A</p>
<p><b>Test Report Form No.</b> .....</p> <p>Test Report Form originator .....</p> <p>Master TRF .....</p>	<p>IEC60950_1A</p> <p>SGS Fimko Ltd</p> <p>2009-09</p>
<p><b>Copyright © 2009 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</b></p> <p>This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</p> <p>If this test Report is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.</p> <p><b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b></p>	

Test item description .....	Switching Power Supply for building-in
Trade Mark .....	<b>TDK-Lambda</b>
Manufacturer .....	TDK-LAMBDA SINGAPORE PTE LTD #06-01/08 1008 TOA PAYOH NORTH SINGAPORE 318996 SINGAPORE
Model/Type reference .....	LS100-X /YYYYYY, where X can be 3.3, 5, 7, 12, 15, 18, 24, 28, 36, 40, 48, or 56. And /YYYYYY can be /B, /BCO, /BCO2, /BCOL, /BCO2L, /BM, /BMCO, /BMCO2, /BMCOL, /BMCO2L, /BL, /BML, /CO, /CO2, /COL, /CO2L, /L or blank.
Rating .....	Input: 100-240 V ac, 2.2 A, 50/60 Hz  Output: LS100-3.3, 3.3 V dc, 20 A; LS100-5, 5 V dc, 16 A; LS100-7, 7 V dc, 11.4 A; LS100-12, 12 V dc, 8.5 A; LS100-15, 15 V dc, 7 A; LS100-18, 18 V dc, 5.8 A; LS100-24, 24 V dc, 4.5 A; LS100-28, 28 V dc, 3.9 A; LS100-36, 36 V dc, 3 A; LS100-40, 40 V dc, 2.7 A; LS100-48, 48 V dc, 2.3 A; LS100-56, 56 V dc, 2 A;

<b>Testing procedure and testing location:</b>	
<input checked="" type="checkbox"/>	<p><b>CB Testing Laboratory</b>                  Testing location / address..... : UL International Demko A/S Lyskaer 8, 2730, Herlev, Denmark</p> <p><input type="checkbox"/> <b>Associated CB Test Laboratory</b>                  Testing location / address..... :                  Tested by (name + signature) ..... : Matthew Vann                  Approved by (+ signature) ..... : William E. Platts</p> <div style="text-align: right; margin-top: 10px;">    </div>
<input type="checkbox"/>	<p><b>Testing Procedure: TMP</b>                  Tested by (name + signature) ..... : _____                  Approved by (+ signature) ..... : _____                  Testing location / address..... : _____</p>
<input type="checkbox"/>	<p><b>Testing Procedure: WMT</b>                  Tested by (name + signature) ..... : _____                  Witnessed by (+ signature)..... : _____                  Approved by (+ signature) ..... : _____                  Testing location / address..... : _____</p>
<input type="checkbox"/>	<p><b>Testing Procedure: SMT</b>                  Tested by (name + signature) ..... : _____                  Approved by (+ signature) ..... : _____                  Supervised by (+ signature) ..... : _____                  Testing location / address..... : _____</p>
<input type="checkbox"/>	<p><b>Testing Procedure: RMT</b>                  Tested by (name + signature) ..... : _____                  Approved by (+ signature) ..... : _____                  Supervised by (+ signature) ..... : _____                  Testing location / address..... : _____</p>

<p><b>Summary of Testing:</b>                  All Applicable tests according to the referenced standard(s) have been carried out</p>
<p><b>Summary of Compliance with National Differences:</b>                  AT, BE, CA, CH, CN, CZ, DE, DK, EU, FI, FR, GB, GR, HU, IL, IT, JP, KR, NL, NO, PL, SE, SG, SI, SK, US</p>

### Copy of Marking Plate

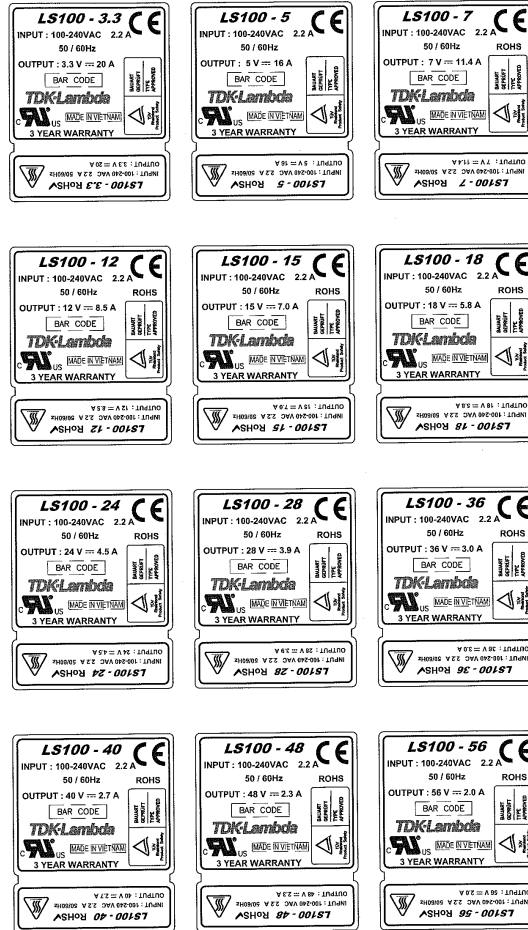

<b>Test item particulars :</b>	
Equipment mobility .....	for building-in
Connection to the mains .....	pluggable A
Operating condition .....	continuous
Access location .....	for building-in
Over voltage category (OVC) .....	OVC II
Mains supply tolerance (%) or absolute mains supply values .....	+10%, -10%
Tested for IT power systems .....	No
IT testing, phase-phase voltage (V) .....	N/A
Class of equipment .....	Class I (earthed)
Considered current rating (A) .....	20A (16A for North America)
Pollution degree (PD) .....	PD 2
IP protection class .....	IP X0
Altitude of operation (m) .....	below 2000m
Altitude of test laboratory (m) .....	below 2000m
Mass of equipment (kg) .....	< 18 (0.60kg)
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object .....	N / A
- test object does meet the requirement .....	P(Pass)
- test object does not meet the requirement .....	F(Fail)
<b>Testing:</b>	
Date(s) of receipt of test item .....	2008-03-02
Date(s) of Performance of tests .....	2008-07-15
<b>General remarks:</b>	
<p>The test results presented in this report relate only to the object tested.                  This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> <p>"(see Enclosure #)" refers to additional information appended to the report.                  "(see appended table)" refers to a table appended to the report.</p> <p>Throughout this report a point is used as the decimal separator.</p>	

<b>GENERAL PRODUCT INFORMATION:</b>
<b>Report Summary</b>
All applicable tests according to the referenced standard(s) have been carried out.
<b>Product Description</b>
Electronic components mounted on PWB.

**Model Differences**

All Models are similar to each other, except the following:-

- a) Output rating;
- b) Layout;
- c) Transformer (T1) secondary winding;
- d) Model designation (refer to Additional information more designation information);

**Additional Information**

LS100-X /YYYYYY, where X can be 3.3, 5, 7, 12, 15, 18, 24, 28, 36, 40, 48, or 56. And /YYYYYY can be /B, /BCO, /BCO2, /BCOL, /BCO2L, /BM, /BMCO, /BMCO2, /BMCOL, /BMCO2L, /BL, /BML, /CO, /CO2, /COL, /CO2L, /L or blank.

- 1) B => Input Connector (CN1) and Output connector (CN2) are from JST;
- 2) BM => Input Connector (CN1) and Output connector (CN2) are from Molex;
- 3) CO => PCB with one (1) side coating;
- 4) CO2 => PCB with two (2) sides coating;
- 5) L => Open frame (Cover removed);
- 6) blank => Input connector and output connector using terminal block TB1;

Terminal block TB1 can only be used with PWB type A; Input Connector CN1 can only be used with PWB type B.

The label is a draft of an artwork for marking plate pending approval by National Certification Bodies and it shall not be affixed to products prior to such an approval.

This CB Report is a re-issue and upgrade to 60950-1 2nd Edition of CB Test Report Reference No. E252373-A11-CB-1, CB Test Certificate Ref.No. US/DK-13759/UL. No testing was conducted under this investigation due to reissue. All required testing carried out under original investigation. Based on the previously conducted testing and the review of product technical documentation including photos, schematics, wiring diagrams and similar, it has been determined that the product continues to comply with the standard.

**Technical Considerations**

- The product was investigated to the following additional standards: EN 60950-1:2006+ A11:2009 (which includes all European national differences, including those specified in this test report).
- The product was submitted and evaluated for use at the maximum ambient temperature (T<sub>ma</sub>) permitted by the manufacturer's specification of: 45 °C for model LS100-3.3, LS100-5, and LS100-7; 50 °C for model LS100-12, LS100-15, LS100-18, LS100-24, LS100-28, LS100-36, LS100-40, LS100-48, LS100-56. --
- The product is intended for use on the following power systems: TN --
- The following were investigated as part of the protective earthing/bonding: Printed wiring board trace (refer to Enclosure - Schematics + PWB for layouts) --

**Engineering Conditions of Acceptability**

When installed in an end-product, consideration must be given to the following:

- LS100-3.3, LS100-5, LS100-7, LS100-12, LS100-15, LS100-18, LS100-24, LS100-28, LS100-36,

LS100-40, LS100-48, LS100-56 are evaluated at a derated load at 81.5% of maximum normal load at  $V_{in} = 90V_{ac}$ ; And evaluated at 100% of maximum normal load at  $V_{in}=115V_{ac}$  to  $264V_{ac}$ .

- Power Supply Unit only evaluated at flat (bottom) on horizontal position for all test.
- The power supply terminals and/or connectors are: Suitable for factory wiring only
- The investigated Pollution Degree is: 2
- The following end-product enclosures are required: Fire , Mechanical , Electrical
- The following secondary output circuits are SELV: LS100-3.3: 3.3 V dc; LS100-5: 5 V dc; LS100-7: 7 V dc; LS100-12: 12 V dc; LS100-15: 15 V dc; LS100-18: 18 V dc; LS100-24: 24 V dc; LS100-28: 28 V dc; LS100-36: 36 V dc; LS100-40: 40 V dc, LS100-48: 48 V dc; LS100-56: 56 V dc.
- The following output terminals were referenced to earth during performance testing: T1 pin 9, 10, 11, 12
- The following secondary output circuits are at non-hazardous energy levels: LS100-3.3: 3.3 V dc; LS100-5: 5 V dc; LS100-7: 7 V dc; LS100-12: 12 V dc; LS100-15: 15 V dc; LS100-18: 18 V dc; LS100-24: 24 V dc; LS100-28: 28 V dc; LS100-36: 36 V dc; LS100-40: 40 V dc, LS100-48: 48 V dc; LS100-56: 56 V dc.
- The following magnetic devices (e.g. transformers or inductor) are provided with an OBJ2 insulation system with the indicated rating greater than Class A (105°C): T1 (Class F)
- The following Production-Line tests are conducted for this product: Electric Strength , Earthing Continuity
- The end-product Electric Strength Test is to be based upon a maximum working voltage of: Primary-SELV: 310Vrms, 542 Vpk , Primary-Earthed Dead Metal: 231 Vrms, 356 Vpk
- The maximum investigated branch circuit rating is: 20 A
- Proper bonding to the end-product main protective earthing termination is: Required
- An investigation of the protective bonding terminals has: Been conducted
- The following input terminals/connectors must be connected to the end-product supply neutral: For model LS100-X, where input is terminal block TB1 (pin 2); For model LS100-X, where input is connector CN1 (pin 2)

**Factory Location(s):**

TDK-LAMBDA MALAYSIA SDN BHD  
LOT 2 & 3, BATU 9 3/4  
KAWASAN PERINDUSTRIAN  
BANDAR BARU JAYA GADING  
26070 KUANTAN MALAYSIA

TDK-LAMBDA MALAYSIA SDN BHD  
PLO33 KAWASAN PERINDUSTRIAN SENAI  
81400 SENAI MALAYSIA

WUXI TDK-LAMBDA ELECTRONICS CO LTD  
LOT 107  
WUXI SINGAPORE INDUSTRIAL PARK  
XING CHUANG ERLU  
WUXI,  
JIANGSU 214028 CHINA

MCTRONIC INDUSTRIES SDN BHD  
LOT 1907 JALAN IBRAHIM  
SUNGAI PINGGAN  
82200 BENUT, PONTIAN  
JOHOR MALAYSIA

**Attachments to Test Report**

National Differences (26 pages)

Enclosures (120 pages)