



FPS1000 - 24

RELIABILITY

DATA

DWG: IA599-79-02		
APPD	CHK	DWG
Dorow P. Apr - 28 - 05	 19.04.05	Zolotay Yurii  19.04.05

INDEX

PAGE

1.MTBF; Calculated Value of MTBF	R-1~4
2.Component Derating	R-5~9
3.Main Components Temperature Rise	R-10~12
4.Elec.Capacitor Computed Life	R-13
5.Abnormal Test	R-14~17
6.Vibration Test	R-18

The above data is typical value. As all units have nearly the same characteristics, the data to be considered as ability value.

1. M.T.B.F

1.1 Method of calculation according to JEITA (RCR-9102)
 based on part count reliability projection of MIL-HDBK-217F.
 Individual failure rates is given to each part and M.T.B.F is
 calculated by the count of each part.

$$MTBF = \frac{1}{\lambda_{\text{equip}}} = \frac{1}{\sum_{i=1}^n N_i (\lambda_G \pi_Q)_i} \times 10^6 (\text{Hours})$$

Where:

- λ_{equip} = Total Equipment Failure Rate (Failures / 10⁶ Hours)
- λ_G = Generic Failure Rate For The ith Generic Part (Failure / 10⁶ Hours)
- N_i = Quantity of ith Generic Part
- n = Number of Different Generic Part Categories
- π_Q = Generic Quality factor for the Generic Part ($\pi_Q = 1$)

1.2 M.T.B.F Values

GF (GROUND, FIXED)

M.T.B.F = 79395 (HOURS)

1.3 Method of calculation according to JEITA (RCR-9102)
 based on part count reliability projection of MIL-HDBK-217F.
 Individual failure rates is given to each part and M.T.B.F is
 calculated by the count of each part.

$$MTBF = \frac{1}{\lambda_{equip}} = \frac{1}{\sum_{i=1}^n N_i (\lambda_G \pi_Q)} \times 10^6 \text{ (Hours)}$$

Where:

- λ_{equip} = Total Equipment Failure Rate (Failures / 10⁶ Hours)
- λ_G = Generic Failure Rate For The ith Generic Part (Failure / 10⁶ Hours)
- N_i = Quantity of ith Generic Part
- n = Number of Different Generic Part Categories
- π_Q = Generic Quality factor for the Generic Part ($\pi_Q = 1$)

1.4 M.T.B.F Values

G_F (GROUND, FIXED)

M.T.B.F = 76223 (HOURS)

1.5 Method of calculation according to BELLCORE calculation method:
 Limited Stress - Method I, Case 3

Individual failure rates is given to each part and M.T.B.F is calculated by the count of each part

$$\lambda = \sum_{i=1}^n \lambda_i$$

$$MTBF = \frac{1}{\lambda}$$

where:

λ_i failure rate of I's item


n number of item

1.6 M.T.B.F Values for 25°C

GB (GROUND, FIXED)

M.T.B.F = 437304 (HOURS)

TEMPERATURE CURVE

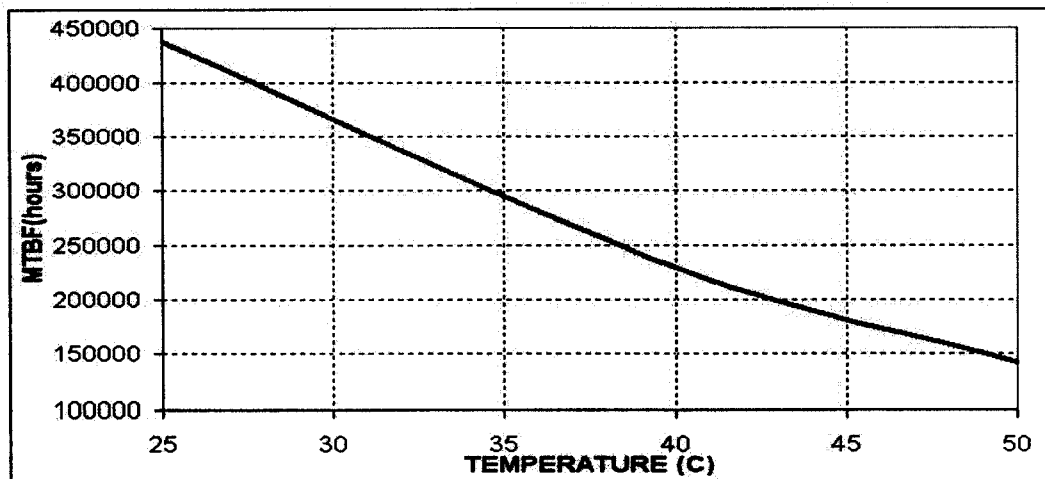

1.7 Method of calculation according to BELLCORE calculation method:
 Limited Stress - Method I, Case 3

Individual failure rates is given to each part and M.T.B.F is calculated by the count of each part

$$\lambda = \sum_{i=1}^n \lambda_i$$

$$MTBF = \frac{1}{\lambda}$$

where:

λ_i failure rate of I's item


n number of item

1.8 M.T.B.F Values for 25°C

GB (GROUND, FIXED)

M.T.B.F = 402718 (HOURS)

TEMPERATURE CURVE

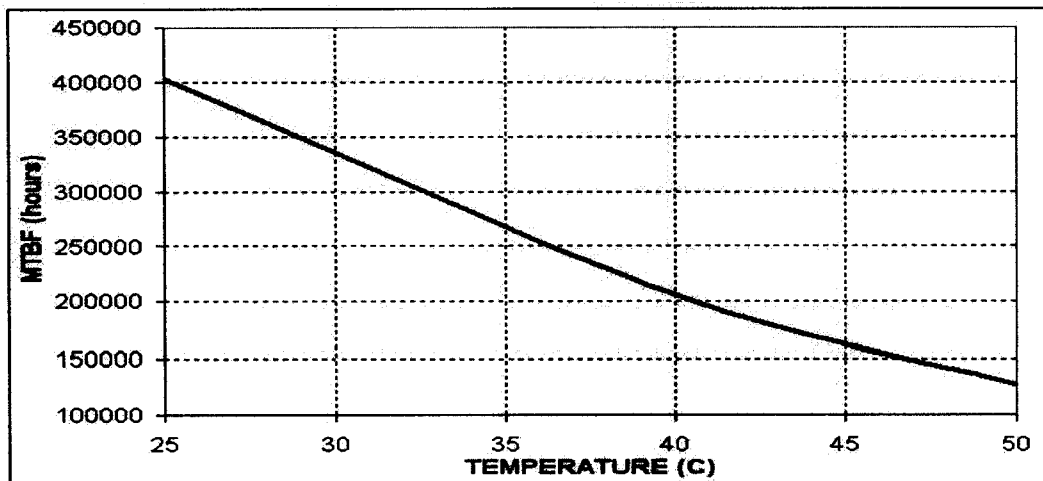

2.COMPONENT DERATING

(1) Calculation method

(a) Condition

Input:	100Vac
Output:	Vout - 100%, Iout - 80, 100%
Ambient temperature:	50, 60°C
Mounting Method:	Standard (horizontal) mounting

(b) Semiconductors

Compared with maximum junction temperature and actual one which is calculated on case temperature, power dissipation and thermal impedance.

(c) IC, Resistors, Capacitors, etc.

Ambient temperature, operating condition, power dissipation and so on are within derating criteria.

(d) Calculation method of thermal impedance

$$\theta_{j-c} = \frac{T_j(\max) - T_c}{P_c(\max)} \quad \theta_{j-a} = \frac{T_j(\max) - T_a}{P_c(\max)} \quad \theta_{j-l} = \frac{T_j(\max) - T_l}{P_c(\max)}$$

T_c: Case Temperature at Start Point of Derating; 25°C in General

T_a: Ambient Temperature at Start Point of Derating; 25°C in General

P_c(max): Maximum Power Dissipation

T_j(max): Maximum Junction temperature

θ_{j-c}: Thermal Impedance between Junction and Case

θ_{j-a}: Thermal Impedance between Junction and Air

θ_{j-l}: Thermal Impedance between Junction and Lead

Vin = 100Vac

Load = 100%

Ta=50°C

D101 D25XB60H SHINDENGEN	Tjmax= 150 °C Pd = 18 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 1.0 °C/W ΔTc = 49.9 °C 117.9 °C	Pmax = 125.0 W Tc = 99.9 °C D.F. = 78.6 %
D102 YG902C3R FUJI	Tjmax= 150 °C Pd = 3 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 3.5 °C/W ΔTc = 22.2 °C 82.7 °C	Pmax = 35.7 W Tc = 72.2 °C D.F. = 55.1 %
D104 YG902C3R FUJI	Tjmax= 150 °C Pd = 3 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 3.5 °C/W ΔTc = 31.1 °C 91.6 °C	Pmax = 35.7 W Tc = 81.1 °C D.F. = 61.1 %
D125 STPS40150CW ST	Tjmax= 175 °C Pd = 11 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.85 °C/W ΔTc = 60.0 °C 119.4 °C	Pmax = 176.0 W Tc = 110.0 °C D.F. = 68.2 %
D126 STPS40H100CW ST	Tjmax= 175 °C Pd = 3 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.55 °C/W ΔTc = 46.8 °C 98.5 °C	Pmax = 272.0 W Tc = 96.8 °C D.F. = 56.3 %
D128 STPS40150CW ST	Tjmax= 175 °C Pd = 11 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.85 °C/W ΔTc = 62.0 °C 121.4 °C	Pmax = 176.0 W Tc = 112.0 °C D.F. = 69.3 %
D131 S60SC4M SHINDEGEN	Tjmax= 150 °C Pd = 7 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.5 °C/W ΔTc = 48.9 °C 102.4 °C	Pmax = 250.0 W Tc = 98.9 °C D.F. = 68.3 %
Q101 SPW32N50C3 INFINEON	Tjmax= 150 °C Pd = 12 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.440 °C/W ΔTc = 40.0 °C 95.3 °C	Pmax = 284.0 W Tc = 90.0 °C D.F. = 63.5 %
Q103 2SK2611 TOSHIBA	Tjmax= 150 °C Pd = 9.0 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.833 °C/W ΔTc = 42.4 °C 99.9 °C	Pmax = 150.0 W Tc = 92.4 °C D.F. = 66.6 %
Q105 2SK2611 TOSHIBA	Tjmax= 150 °C Pd = 9.0 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.833 °C/W ΔTc = 30.2 °C 87.7 °C	Pmax = 150.0 W Tc = 80.2 °C D.F. = 58.5 %

Vin = 100Vac

Load = 100%

Ta=50°C

Q110	Tjmax= 150 °C	$\theta_{j-c} = 139.0$ °C/W	Pmax = 0.9 W
2SC2655	Pd = 0.24 W	$\Delta T_c = 20.3$ °C	Tc = 70.3 °C
TOSHIBA	Tj = Tc + ($\theta_{j-c} \times Pd$) = 103.7 °C		D.F. = 69.1 %
Q118	Tjmax= 150 °C	$\theta_{j-c} = 250.0$ °C/W	Pmax = 0.5 W
2SB1123T	Pd = 0.046 W	$\Delta T_c = 18.6$ °C	Tc = 68.6 °C
SANYO	Tj = Tc + ($\theta_{j-c} \times Pd$) = 80.1 °C		D.F. = 53.4 %
Q2	Tjmax= 150 °C	$\theta_{j-c} = 250.0$ °C/W	Pmax = 0.5 W
2SB1123T	Pd = 0.1 W	$\Delta T_c = 10.5$ °C	Tc = 60.5 °C
SANYO	Tj = Tc + ($\theta_{j-c} \times Pd$) = 85.5 °C		D.F. = 57.0 %
A102	Tjmax= 150 °C	$\theta_{j-c} = 3.0$ °C/W	Pmax = 41.6 W
MIP0224SY	Pd = 0.7 W	$\Delta T_c = 22.3$ °C	Tc = 72.3 °C
MATSUSHITA	Tj = Tc + ($\theta_{j-c} \times Pd$) = 74.4 °C		D.F. = 49.6 %
A104	Tjmax= 150 °C	$\theta_{j-c} = 27.0$ °C/W	Pmax = 1 W
UCC2806DW	Pd = 0.04 W	$\Delta T_c = 13.7$ °C	Tc = 63.7 °C
TEXAS INSTR.	Tj = Tc + ($\theta_{j-c} \times Pd$) = 64.8 °C		D.F. = 43.2 %
A105	Tjmax= 125 °C	$\theta_{j-a} = 180.0$ °C/W	Pmax = 0.6 W
LM78L05ACM	Pd = 0.03 W	$\Delta T_a = 33.9$ °C	Ta = 83.9 °C
NEC	Tj = Ta + ($\theta_{j-a} \times Pd$) = 89.3 °C		D.F. = 71.4 %
A106	Tjmax= 150 °C	$\theta_{j-c} = 7.0$ °C/W	Pmax = 17.8 W
uPC7805AHF	Pd = 1.5 W	$\Delta T_c = 33.5$ °C	Tc = 83.5 °C
NEC	Tj = Tc + ($\theta_{j-c} \times Pd$) = 94.0 °C		D.F. = 62.7 %
A109	Tjmax= 150 °C	$\theta_{j-c} = 7.0$ °C/W	Pmax = 17.8 W
uPC78M05AHF	Pd = 1.3 W	$\Delta T_c = 36.3$ °C	Tc = 86.3 °C
NEC	Tj = Tc + ($\theta_{j-c} \times Pd$) = 95.4 °C		D.F. = 63.6 %
A1	Tjmax= 150 °C	$\theta_{j-c} = 50.0$ °C/W	Pmax = 0.65 W
FA5502M	Pd = 0.074 W	$\Delta T_c = 17.2$ °C	Tc = 67.2 °C
FUJI	Tj = Tc + ($\theta_{j-c} \times Pd$) = 70.9 °C		D.F. = 47.3 %

Vin = 100Vac

Load = 80%

Ta=60°C

D101 D25XB60H SHINDENGEN	Tjmax= 150 °C Pd = 15.2 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 1.0 °C/W ΔTc = 34.2 °C 109.4 °C	Pmax = 125.0 W Tc = 94.2 °C D.F. = 72.9 %
D102 YG902C3R FUJI	Tjmax= 150 °C Pd = 2.4 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 3.5 °C/W ΔTc = 17.7 °C 86.1 °C	Pmax = 35.7 W Tc = 77.7 °C D.F. = 57.4 %
D104 YG902C3R FUJI	Tjmax= 150 °C Pd = 2.4 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 3.5 °C/W ΔTc = 24.4 °C 92.8 °C	Pmax = 35.7 W Tc = 84.4 °C D.F. = 61.9 %
D125 STPS40150CW ST	Tjmax= 175 °C Pd = 8.8 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.85 °C/W ΔTc = 45.1 °C 112.6 °C	Pmax = 176.0 W Tc = 105.1 °C D.F. = 64.3 %
D126 STPS40H100CW ST	Tjmax= 175 °C Pd = 2.4 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.55 °C/W ΔTc = 34.7 °C 96.0 °C	Pmax = 272.0 W Tc = 94.7 °C D.F. = 54.9 %
D128 STPS40150CW ST	Tjmax= 175 °C Pd = 8.8 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.85 °C/W ΔTc = 48.9 °C 116.4 °C	Pmax = 176.0 W Tc = 108.9 °C D.F. = 66.5 %
D131 S60SC4M SHINDENGEN	Tjmax= 150 °C Pd = 5.6 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.5 °C/W ΔTc = 38.6 °C 101.4 °C	Pmax = 250.0 W Tc = 98.6 °C D.F. = 67.6 %
Q101 SPW32N50C3 INFINEON	Tjmax= 150 °C Pd = 9.6 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.440 °C/W ΔTc = 30.2 °C 94.4 °C	Pmax = 284.0 W Tc = 90.2 °C D.F. = 62.9 %
Q103 2SK2611 TOSHIBA	Tjmax= 150 °C Pd = 7.2 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.833 °C/W ΔTc = 32.6 °C 98.6 °C	Pmax = 150.0 W Tc = 92.6 °C D.F. = 65.7 %
Q105 2SK2611 TOSHIBA	Tjmax= 150 °C Pd = 7.2 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	θ_{j-c} = 0.833 °C/W ΔTc = 23.1 °C 89.1 °C	Pmax = 150.0 W Tc = 83.1 °C D.F. = 59.4 %

Vin = 100Vac

Load = 80%

Ta=60°C


Q110 2SC2655 TOSHIBA	Tjmax= 150 °C Pd = 0.24 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	$\theta_{j-c} = 139.0$ °C/W $\Delta Tc = 17.2$ °C 110.6 °C	Pmax = 0.9 W Tc = 77.2 °C D.F. = 73.7 %
Q118 2SB1123T SANYO	Tjmax= 150 °C Pd = 0.046 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	$\theta_{j-c} = 250.0$ °C/W $\Delta Tc = 14.6$ °C 86.1 °C	Pmax = 0.5 W Tc = 74.6 °C D.F. = 57.4 %
Q2 2SB1123T SANYO	Tjmax= 150 °C Pd = 0.1 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	$\theta_{j-c} = 250.0$ °C/W $\Delta Tc = 9.2$ °C 94.2 °C	Pmax = 0.5 W Tc = 69.2 °C D.F. = 62.8 %
A102 MIP0224SY MATSUSHITA	Tjmax= 150 °C Pd = 0.7 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	$\theta_{j-c} = 3.0$ °C/W $\Delta Tc = 19.8$ °C 81.9 °C	Pmax = 41.6 W Tc = 79.8 °C D.F. = 54.6 %
A104 UCC2806DW TEXAS INSTR.	Tjmax= 150 °C Pd = 0.04 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	$\theta_{j-c} = 27.0$ °C/W $\Delta Tc = 10.8$ °C 71.9 °C	Pmax = 1.0 W Tc = 70.8 °C D.F. = 47.9 %
A105 LM78L05ACM NEC	Tjmax= 125 °C Pd = 0.03 W Tj = Ta + ($\theta_{j-a} \times Pd$) =	$\theta_{j-a} = 180.0$ °C/W $\Delta Ta = 28.7$ °C 94.1 °C	Pmax = 0.6 W Ta = 88.7 °C D.F. = 75.3 %
A106 uPC7805AHF NEC	Tjmax= 150 °C Pd = 1.5 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	$\theta_{j-c} = 7.0$ °C/W $\Delta Tc = 33.5$ °C 104.0 °C	Pmax = 17.8 W Tc = 93.5 °C D.F. = 69.3 %
A109 uPC78M05AHF NEC	Tjmax= 150 °C Pd = 1.04 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	$\theta_{j-c} = 7.0$ °C/W $\Delta Tc = 32.8$ °C 100.1 °C	Pmax = 17.8 W Tc = 92.8 °C D.F. = 66.7 %
A1 FA5502M FUJI	Tjmax= 150 °C Pd = 0.074 W Tj = Tc + ($\theta_{j-c} \times Pd$) =	$\theta_{j-c} = 50.0$ °C/W $\Delta Tc = 16.6$ °C 80.3 °C	Pmax = 0.65 W Tc = 76.6 °C D.F. = 53.5 %

3.MAIN COMPONENTS TEMPERATURE RISE

a) Output voltage: 21.5V

Location No.	Parts Name	Temperature Rise (°C)
A1	IC	17.6
A102	IC	22.0
A104	IC	14.0
A106	IC	33.4
A109	IC	36.5
C101	FILM CAP	18.3
C102	FILM CAP	22.9
C110	ELEC. CAP.	7.0
C141	ELEC. CAP.	21.8
D101	BRIDGE	48.3
D126	DIODE	43.8
D128	DIODE	59.3
D131	DIODE	48.5
L101	CHOKE	33.5
L104	CHOKE	52.2
L136	CHOKE	45.2
Q101	MOSFET	39.3
Q102	MOSFET	34.6
Q103	MOSFET	39.6
Q105	MOSFET	27.4
T101	TRANSFORMER	56.5
T102	TRANSFORMER	47.3
T103	TRANSFORMER	21.5


Conditions:

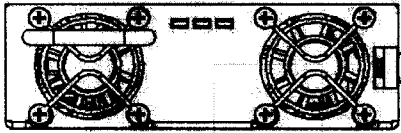Standard Mounting	
Ta	25°C
Input Voltage	100VAC
Output Voltage	21.5V
Output Current	40A

b) Output voltage: 24V

Location No.	Parts Name	Temperature Rise (°C)
A1	IC	17.2
A102	IC	22.3
A104	IC	13.7
A106	IC	33.5
A109	IC	36.3
C101	FILM CAP	20.1
C102	FILM CAP	25.7
C110	ELEC. CAP.	7.0
C141	ELEC. CAP.	22.3
D101	BRIDGE	49.9
D126	DIODE	46.8
D128	DIODE	62.0
D131	DIODE	48.9
L101	CHOKE	39.1
L104	CHOKE	59.0
L136	CHOKE	45.0
Q101	MOSFET	40.0
Q102	MOSFET	36.5
Q103	MOSFET	42.4
Q105	MOSFET	30.2
T101	TRANSFORMER	59.7
T102	TRANSFORMER	50.6
T103	TRANSFORMER	24.1


Conditions:

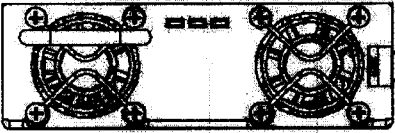Standard Mounting	
Ta	25°C
Input Voltage	100VAC
Output Voltage	24V
Output Current	40A

c) Output voltage: 29V

Location No.	Parts Name	DT Temperature Rise (°C)
A1	IC	17.9
A102	IC	23.1
A104	IC	13.8
A106	IC	35.2
A109	IC	37.3
C101	FILM CAP	20.2
C102	FILM CAP	25.9
C110	ELEC. CAP.	7.0
C141	ELEC. CAP.	21.0
D101	BRIDGE	51.1
D126	DIODE	35.8
D128	DIODE	56.9
D131	DIODE	42.3
L101	CHOKE	39.5
L104	CHOKE	61.4
L136	CHOKE	35.3
Q101	MOSFET	37.3
Q102	MOSFET	38.5
Q103	MOSFET	37.2
Q105	MOSFET	26.1
T101	TRANSFORMER	52.0
T102	TRANSFORMER	42.5
T103	TRANSFORMER	23.0

Conditions:

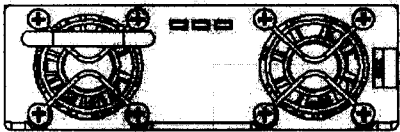Standard Mounting	
Ta	25°C
Input Voltage	100VAC
Output Voltage	29V
Output Current	34A

4.ELECTROLYTIC CAPACITORS LIFE TIME ESTIMATION


MODEL	COMPUTED LIFE (years) AT Ta			
	30°C	40°C	50°C	60°C
FPS1000 - 24	29.94	14.97	7.49	4.3
Load(%)	100	100	100	80

FORMULA:
$$L = L_0 \times 2^{\frac{105 - T_c}{10}} \quad (\text{years})$$

L: Elec.capacitor computed life (24 hours per day,365 days operation)

Lo: Guaranteed life for Elec.capacitor

Tc: Case temperature of Elec.capacitor

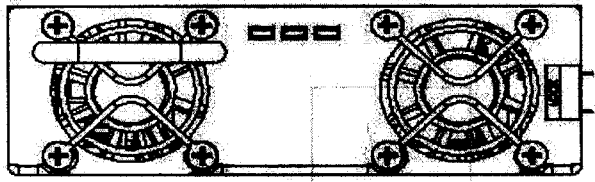Standard Mounting	
Input Voltage	100VAC
Output Voltage	24V

5. ABNORMAL TEST

FPS1000 - 24

Model:24V
Input:230VAC

Ta:25°C

Vout=24V
Iout=40A

No	Test Position		Test Mode		Test Result												Note	
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12		
					Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse opened	P < O	P C O	No Output	No Change	Others		
1	D101	AC-DC	•								•			•			F101	
		AC-AC	•								•			•				F101
		AC		•											•			
		DC		•											•			
2	D102		•							•	•			•			F101, Q101, Q102, D103, ZD101, A1	
				•												•		
3	D104		•							•	•			•			F101, Q101, Q102, D103, ZD101, A1	
				•												•		
4	D106		•							•							R112, R113-opened	
				•												•		
5	D108		•							•	•			•			F102	
				•												•		
6	D114		•							•				•			A102, ZD106,R151-opened	
				•												•		
7	D115		•											•				
				•												•		
8	D117		•											•			Hicc-up	
				•											•			
9	D118		•											•			Hicc-up	
				•												•		• Vo up to 26V, see note 1
10	D119		•											•				
				•												•		
11	D121		•											•			Hicc-up	
				•												•		
12	D125		•							•				•			F102	
				•													•	Vo=15.5V
13	D126		•							•				•			F102	
				•												•		
14	T101	1-3	•							•	•			•			F102, Q103, Q104, D138, D139	
		5-9	•							•	•			•			F102, Q103, Q104, D138, D139	
		A-B	•							•	•			•			F102, Q103, Q104, D138, D139	
		1		•												•		
		A		•													•	Vo=15.5V
		5		•													•	Vo=15V, see note 2
15	T103	1-3	•											•				
		5-6	•											•		•	see note 3	
		A-B	•											•		•		
		5-D	•											•		•	see note 4	

NOTE 1: Pin increase by ~90W

NOTE 2: Pin reduced by ~410W

NOTE 3: Pin increase by ~5W. Output shutdown after ~1min

NOTE 4: Pin increase ~8W. Output shutdown after ~1 min.

FPS1000 - 24

Model:24V

Vout=24V

Input:230VAC

Ta:25°C

Iout=40A

No	Test Position	Test Point	Test Mode		Test Result												Note				
			Short	Open	1	2	3	4	5	6	7	8	9	10	11	12					
	Location No.				Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse opened	P < O	P > O	No Output	No Change	Others					
15	T103	5-C	•												•		•	after 1 minute - no output			
		7-8	•												•		•	after 1 minute - no output			
		C		•									•								
		1		•																	
		6		•																	
		D		•															•	Vo increase to 26V,Pin increase by ~90W	
		A		•																	
16	Q101	G-S	•							•								•	R21-open, Pin increase by ~7W		
		D-S	•							•								•	F101		
		D-G	•								•								•	F101	
		S		•															•	Pin increase by ~10W	
		G		•							•								•	Q101, Q102, ZD101, R110, R111, R103	
		D		•															•	Pin increase by ~7W	
17	Q103	D-S	•							•									•	F102, D138, D139, Q115, Q118	
		G-S	•							•									•	Pin ~400W, Vo=15V, R177-open	
		G-D	•							•									•	F102, D138, D139	
		D		•						•									•	F102, D138, D139, ZD102, A104, Q115, Q118, R119 and R176-opened,	
		S		•						•									•	Q103, ZD102, A104, F102 R115, R116 and R119-opened	
		G		•						•									•	F102, D138, D139, ZD102, A104, Q115, Q118, R119 and R176-opened	
18	L104		•							•	•								•	Q101, Q102, A1, ZD101, F101	
				•																•	
19	L105		•																	•	
				•																	•
20	L106		•																	•	
				•																	•
21	L136		•								•									•	F102
				•																	•
22	C113		•							•	•									•	F102, D138, D139, Q115, Q118
				•																	•
23	C118		•																	•	
				•																	•
24	C119		•																	•	
				•																	•
25	C120		•																	•	Hicc-up
				•																	•
26	C121		•																	•	Hicc-up
				•																	•

FPS1000 - 24

Model:24V
Input:230VAC

Ta:25°C

Vout=24V
Iout=40A

No	Test Position		Test Mode		Test Result												Note
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12	
					Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse opened	OVP	PCO	No Output	No Change	Others	
27	C122		•											•			Hicc-up
				•													•
28	C123		•							•							R265 - open
				•													•
29	C124		•											•			Hicc-up
				•													•
30	C125		•											•			Hicc-up
				•													•
31	C126		•											•			Hicc-up
				•													•
32	C127		•														• +12V AUX - 4.5V
				•													•
33	C138		•							•							R184 - open
				•													•
34	C139		•							•							R185 - open
				•													•
35	C141		•								•			•			F102
				•													•
36	C148		•										•	•			
				•													•
37	C186		•											•			Pin increase by ~6W
				•													•
38	A102	G-S	•											•			
		D-S	•							•				•			R151- open
		D-G	•							•				•			R151, ZD106, A102
		D		•											•		
		G		•											•		
		S		•											•		

FPS1000 - 24

Model:24V
Input:100VAC

Ta:25°C


Vout=24V
Iout=40A

No	Test Position		Test Mode		Test Result												Note	
	Location No.	Test Point	Short	Open	1	2	3	4	5	6	7	8	9	10	11	12		
						Fire	Smoke	Burst	Smell	Red Hot	Damaged	Fuse opened	V O	P O	No Output	No Change	Others	
1	D106		•								•							R112, R113
				•														
2	D118			•														• Vout: 26V, Pin increased by ~90W
				•											•			Hicc-up
3	L104		•							•	•			•				Q101, Q102, A1, ZD101, F101
				•											•			
4	L105		•														•	
				•							•							
5	L106		•															• Pin increased by ~20W
				•							•							
6	C108		•								•							R103
				•														
7	C110		•															R103
				•														
8	Q101	G-S	•								•	•						Pin increase by 70W, see note 5
		D-S	•								•	•						F101, ZD101, R109, R110, R111, Q101, Q102, Q1, Q2, R103
		D-G	•								•							ZD101, R109, R110, R111, Q101, Q102, R103
		D		•							•							Pin increase by ~70W, see note 5
		S		•							•							Q101, Q102, ZD101, R103
		G		•							•							Pin increase by ~70W, see note 5

NOTE 5 - Q101, Q102, ZD101, R103 damaged after ~1min

6.VIBRATION TEST


- 1) Vibration test class
Frequency variable endurance test
- 2) Equipment used
Controller: GENRAD-2503
Vibrator: ULHOLTZ-DICKIE TA1000
- 3) Testing method
FPS1000 installed in FPS-S1U Rack

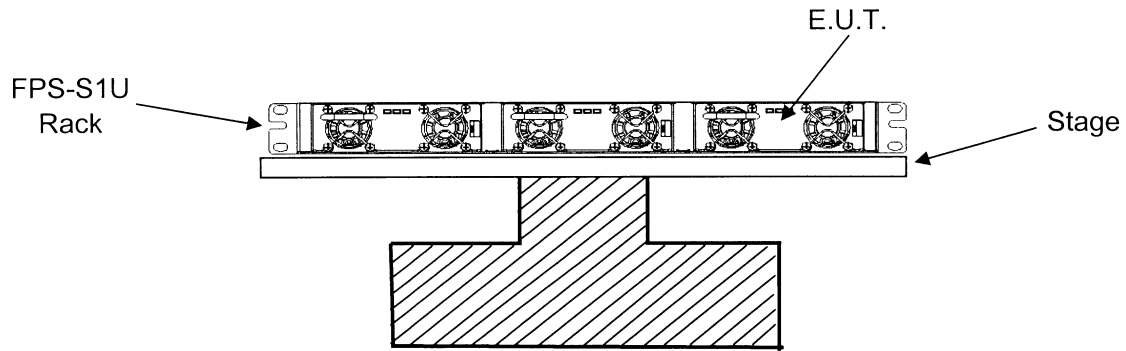

Test condition:

A) Vibration Test with Frequency Sweep

Sinusoidal Vibration in Freq.: 5 - 500 Hz
 Test level: 1.5G
 Test time: 1 oct/min, 20 sweeps Per axis
 Test performed in Axes x-y-z



B) Mech. Shock

Test level: half sine, 30G 11ms
 3 mech.shocks in all of the 3 axes at each direction.

(4)Test Result

Pass