

***TDK·Lambda***

**RSAL-A SERIES**

**SPECIFICATIONS**



A575NAA-RSAL-A-001 200801


# RSAL-A SERIES

## SPECIFICATIONS

Items	Model		RSAL-20R5A	RSAL-2001A	RSAL-2002A	RSAL-2003A	RSAL-2006A	
1	Rated Voltage (AC, DC)	V	250					
2	Rated Current (AC, DC) *1	A	0.5	1	2	3	6	
3	Test Voltage (terminals to base plate, 1min AC)	V	2500 at 20±15°C, 65± 20 %					
4	Isolation Resistance (terminals to base plate, 500V DC)	M Ω	100 min. at 20±15°C, 65± 20 %					
5	Leakage Current	250V, 60Hz	1 max.					
6	DC Resistance (both lines)	m Ω	700	600	250	150	80	
7	Temperature Rise	°C	30 max.					
8	Operating Temperature	°C	-25 ~ +85					
9	Operating Humidity	-	15 ~ 85 % RH					
10	Storage Temperature	°C	-25 ~ +85					
11	Storage Humidity	-	5 ~ 85 % RH					
12	Vibration	-	Frequency : 10~55Hz Amplitude : 1.5mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 2 hours each.					
13	Safety Standards	-	EN60939 (SEMKO), UL1283, CSA C22.2 No.8					
14	Weight	g	43	43	46	46	46	

### NOTE

- \*1 Value for Ta less than 55 °C (include 55 °C)
- For Ta more than 55 °C (not include 55 °C)
- According to the derating curve shown on the right.

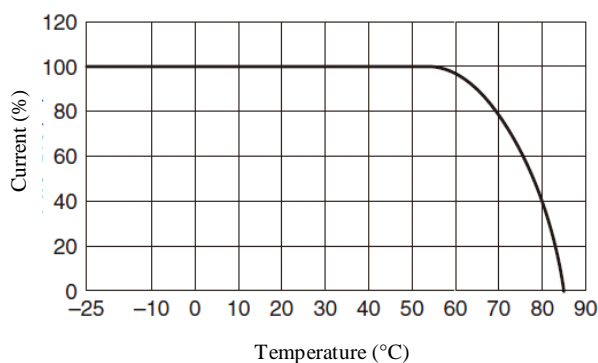

### CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.

A575NAA-RSAL-A-001 200801