

***TDK-Lambda***

**RTHB SERIES**

**SPECIFICATIONS**



A575NAA-RTHB-001 200801


# RTHB SERIES

## SPECIFICATIONS

Items	Model		RTHB-5006	RTHB-5010	RTHB-5020	RTHB-5030	RTHB-5040
	1	Rated Voltage (AC, DC)	V	500			
2	Rated Current (AC, DC) *1	A	6	10	20	30	40
3	Test Voltage (terminals to base plate, 1min AC)	V	2500 at 20±15°C, 65± 20 %				
4	Isolation Resistance (terminals to base plate, 500V DC)	M Ω	100 min. at 20±15°C, 65± 20 %				
5	Leakage Current	500V, 60Hz	mA				
6	DC Resistance (both lines)	m Ω	290	120	50	26	20
7	Temperature Rise	°C	35 max.				
8	Operating Temperature	°C	-25 ~ +85				
9	Operating Humidity	-	15 ~ 85 % RH				
10	Storage Temperature	°C	-25 ~ +85				
11	Storage Humidity	-	5 ~ 85 % RH				
12	Vibration	-	Frequency : 10~55Hz Amplitude : 0.7mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 0.5 hours each.				
13	Safety Standards	-	EN60939, UL1283				
14	Weight	g	750	780	1100	1100	2240

### NOTE

- \*1 Value for Ta less than 50 °C (include 50 °C)
- For Ta more than 50 °C (not include 50 °C)
- According to the derating curve shown on the right.

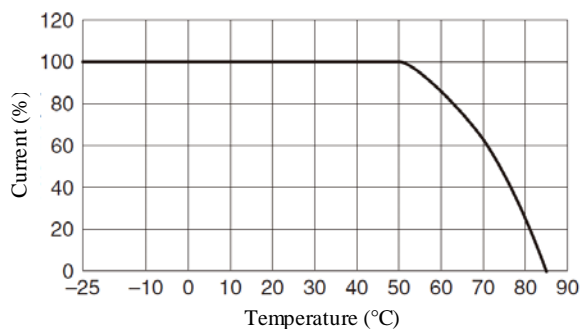

### CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.

A575NAA-RTHB-001 200801


## RTHB SERIES

# SPECIFICATIONS

Items	Model		RTHB-5050	RTHB-5060	RTHB-5080	RTHB-5100	RTHB-5150	
1	Rated Voltage (AC, DC)	V	500					
2	Rated Current (AC, DC) *1	A	50	60	80	100	150	
3	Test Voltage (terminals to base plate, 1min AC)	V	2500 at 20±15°C, 65± 20 %					
4	Isolation Resistance (terminals to base plate, 500V DC)	M Ω	100 min. at 20±15°C, 65± 20 %					
5	Leakage Current	500V, 60Hz	mA					5 max.
6	DC Resistance (both lines)	m Ω	14	10	10	8	6	
7	Temperature Rise	°C	35 max.					
8	Operating Temperature	°C	-25 ~ +85					
9	Operating Humidity	-	15 ~ 85 % RH					
10	Storage Temperature	°C	-25 ~ +85					
11	Storage Humidity	-	5 ~ 85 % RH					
12	Vibration	-	Frequency : 10~55Hz Amplitude : 0.7mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 0.5 hours each.					
13	Safety Standards	-	EN60939, UL1283					
14	Weight	g	2240	2240	7700	8200	12500	

### NOTE

- \*1 Value for Ta less than 50 °C (include 50 °C)
- For Ta more than 50 °C (not include 50 °C)
- According to the derating curve shown on the right.

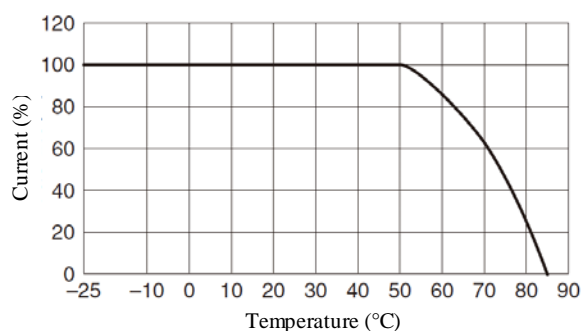

### CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.

A575NAA-RTHB-001 200801