


FB Series

Wet molding process / La-Co free type

FB6E

NRND

Demagnetization curve

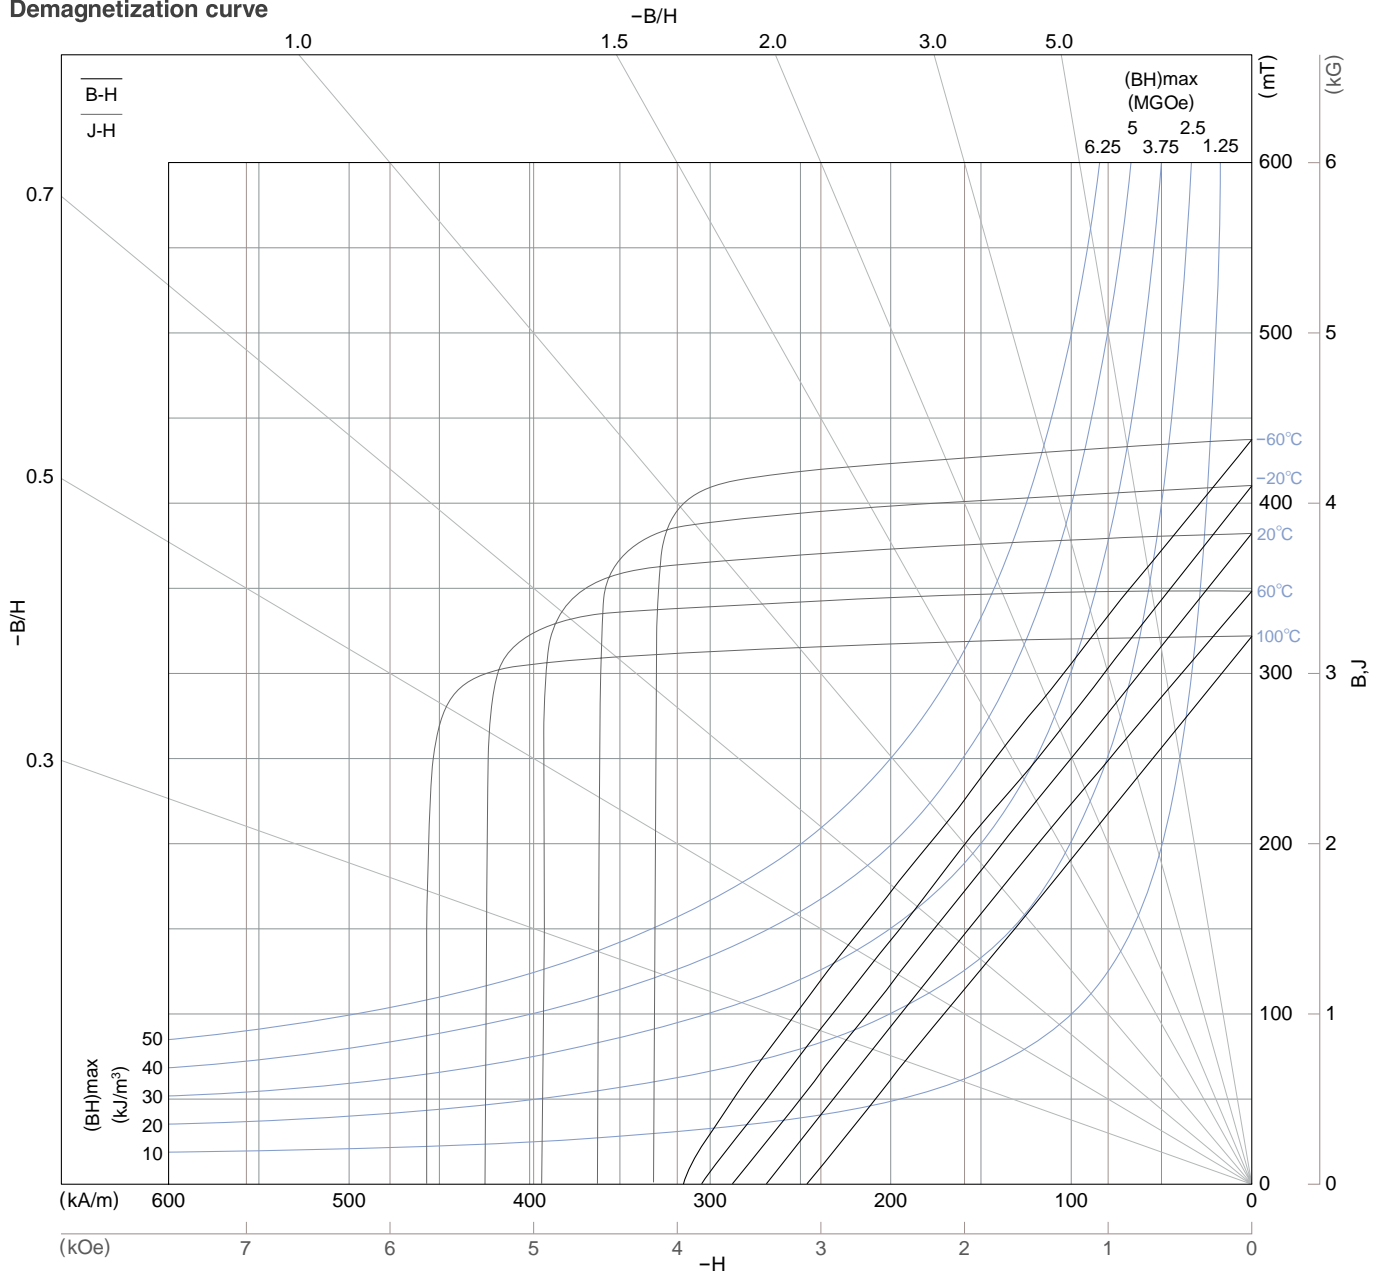

Magnetic characteristics

Material	FB6E		
Residual magnetic flux density B_r	(mT)	380 ± 10	$(3.8 \pm 0.1 \text{ kG})$
Coercive force H_{cB}	(kA/m)	290.5 ± 12	$(3.65 \pm 0.15 \text{ kOe})$
Intrinsic coercive force H_{cJ}	(kA/m)	393.9 ± 12	$(4.95 \pm 0.15 \text{ kOe})$
Maximum energy product $(BH)_{max}$	(kJ/m³)	27.5 ± 1.6	$(3.45 \pm 0.2 \text{ MGOe})$

△ The details can be found by referring to the appended individual delivery specifications.
All specifications are subject to change without notice.