

**NOTES**


- A : MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT, COUNTRY OF MANUFACTURE AND SAFETY MARKING (FOR ONLY APPROVED PRODUCTS) ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B : M4 TAPPED HOLES (16) FOR CUSTOMER CHASSIS MOUNTING.  
 (SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m.  
 RECOMMENDED M4 SCREWS TORQUE : 1.27N·m)
- C : I/O SIGNAL CONNECTOR
- |                    |                            |          |
|--------------------|----------------------------|----------|
| CONNECTOR          | : S12B-PHDSS(LF)(SN)       | (JST)    |
| MATCHING HOUSING   | : PHDR-12VS                | (JST)    |
| MATCHING CONTACT   | : SPHD-002T-P0.5(AWG28~24) | (JST) OR |
|                    | : SPHD-001T-P0.5(AWG26~22) | (JST) OR |
|                    | : BPHD-001T-P0.5(AWG26~22) | (JST)    |
| HAND CRIMPING TOOL | : YRS-620(SPHD-002T-P0.5)  | (JST)    |
|                    | : YC-610R(SPHD-001T-P0.5)  | (JST)    |
|                    | : YC-610R(BPHD-001T-P0.5)  | (JST)    |

- D : RECOMMENDED TORQUE FOR THE TERMINAL PIECE.
- |                                 |           |
|---------------------------------|-----------|
| INPUT TERMINAL (M4 SCREW)       | : 1.27N·m |
| OUTPUT TERMINAL (M8 BOLT & NUT) | : 10.8N·m |
| OUTPUT TERMINAL (M4 SCREW)      | : 1.27N·m |

**ACCESSORIES**

- \* ATTACHED CONNECTOR
- SHORTING +S~+V, -S~-V, PV~REF & CNT~TOG
- ATTACHED ON CN01 AT SHIPMENT

**SIGNAL CONNECTOR INFORMATION**

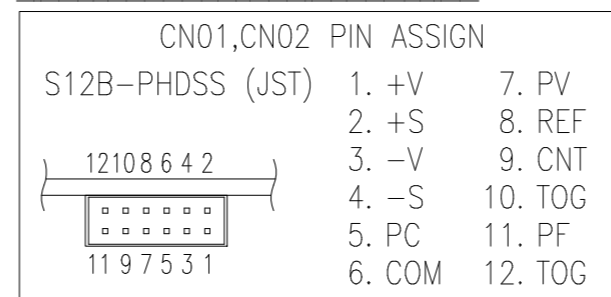

(unit : mm)

|                   |            |
|-------------------|------------|
| MODEL NAME        | HWS1500/ME |
| <b>TDK-Lambda</b> |            |

DA006-02-01/ME-D