

**CONNECTORS USED:**

PART DESCRIPTION	CATALOG NO.	MANUFACTURER	QTY
PIN HEADER (INPUT SIDE CN1)	5414-30B OR 5273-06A(1.4.6)	MOLEX	1
PIN HEADER(OUTPUT SIDE CN2)	5273-06A	MOLEX	1


**RECOMMENDED HOUSING & TERMINAL PIN.**

\* NOT INCLUDED WITH THE PRODUCT.


SOCKET HOUSING (CN1)	5195-06	MOLEX	1
SOCKET HOUSING (CN2)	5195-06	MOLEX	1
TERMINAL PINS (CN1, 2)	5194PBT	MOLEX	9

HAND CRIMPING TOOL: 11-26-0058

MANUFACTURER: MOLEX

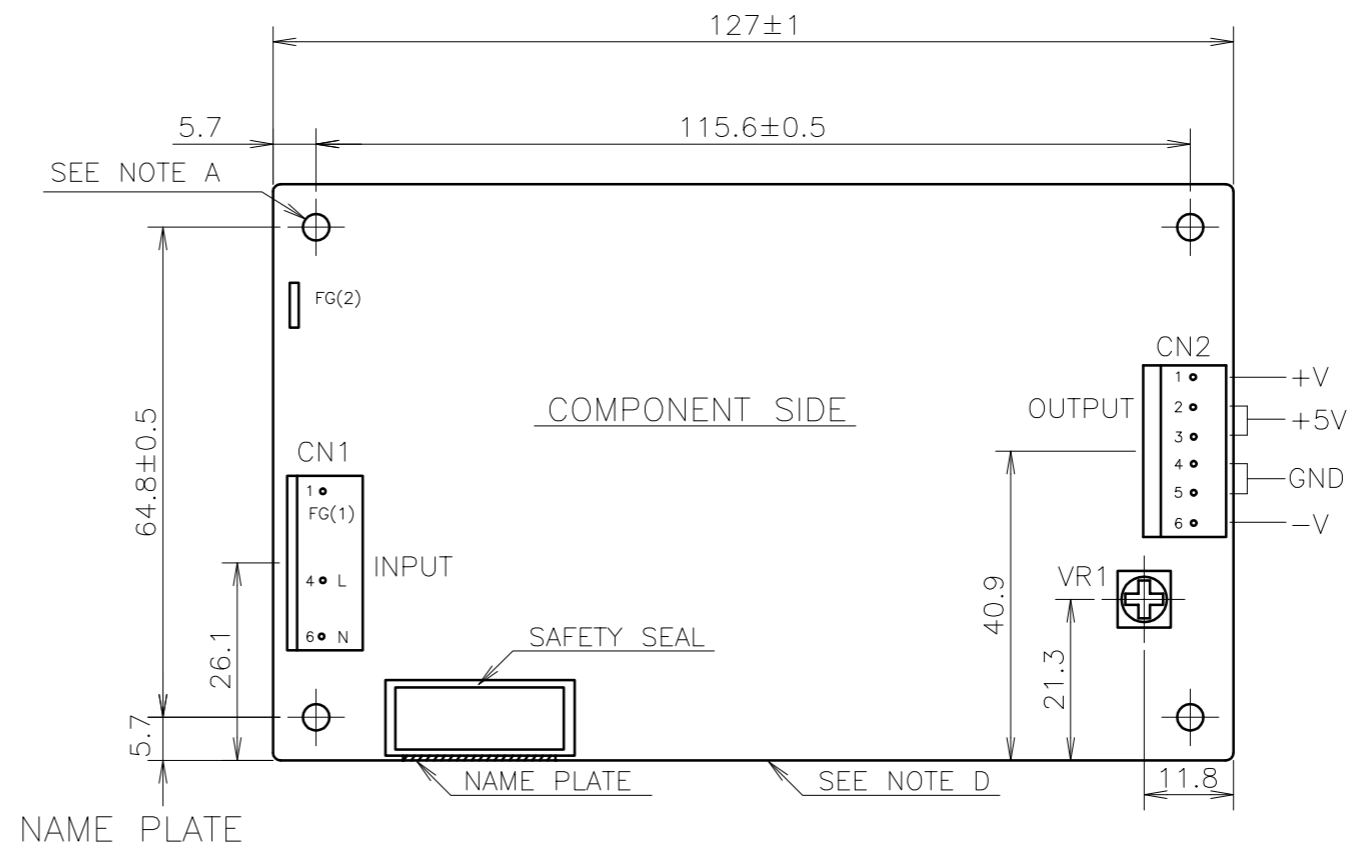

NAME PLATE

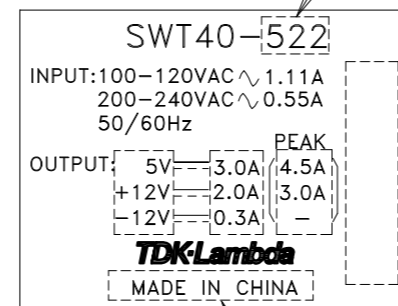

SEE NOTE C

SAFETY SEAL



**NOTES**

- A: THE 4- $\phi$ 3.5 HOLES ARE CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.
- B: MODEL NAME, NORMAL OUTPUT VOLTAGE AND AVERAGE OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- C: COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.
- D: TO KEEP THE DISTANCE MORE THAN 4mm BETWEEN PC-BOARD EDGE AND CUSTOMER'S CHASSIS.
- E: FG(1) OR FG(2) IS FOR SAFTY GROUND CONNECTION.

(unit : mm)

MODEL NAME	SWT40
<b>TDK-Lambda</b>	
CA702-02-01J	