

## JWT Series

Triple Output  
Industrial Power Supplies

- 5 Year Warranty
- Power Factor Corrected
- Approved to VDE01 60 Machinery Directive
- Universal Input (85 265VAC)

### Key Market Segments & Applications

Factory Automation: Process Control, NC-Machining, Automotive, Packaging Equipment, Materials Handling, Chemical Processing, Robots

Test & Measurement: Burn-in & Test, Automated Test, Instrumentation, Measurement, Detection

### JWT Features and Benefits

#### Features

- VDE01 60 Approved
- 5 Year Warranty
- Power Factor Corrected
- Level B EMI

#### Benefits

- No Additional Approvals Needed
- Lower Cost of Ownership
- Supports Global Use
- Assists Systems Compliance

### Specifications


MODEL		JWT75	JWT100
ITEMS			
Max Output Power	W	75	100
Efficiency (Typ)	%	72	
Input Voltage range	-	85 - 265VAC (47 - 63Hz) or 120 - 330VDC	
Input Current Typ	A	1.2 / 0.6	1.4 / 0.7
Inrush Current	A	14A at 100VAC, 28A at 200VAC input	
Power Factor	-	Meets EN61000-3-2	
Output Voltage Accuracy	-	V1 variable, V2 & V3 +/-5%	
Temperature Coefficient	-	V1 & V2 <0.02%/°C, V3 <0.03%/°C	
Overcurrent Protection	-	>105%	
Overvoltage Protection	V	Main output only: 5.7 - 7V	
Hold Up Time (Typ)	ms	20	
Leakage Current	-	0.75mA Max, 0.44mA typical at 230VAC	
Operating Temperature	-	-10°C to +65°C, derate linearly to 50% load from 50°C to 65°C -10°C to +50°C, derate linearly to 60% load from 40°C to 50°C with cover	
Storage Temperature	°C	-30 to +85	
Humidity	-	30 - 90% RH (operating), 10 - 95% RH (non operating)	
Cooling	-	Convection	
Withstand Voltage	-	Input to Ground 2kVAC (20mA), Input to Output 3kVAC (20mA), Output to Ground 500VAC (100mA) for 1 min.	
Isolation Resistance	-	>100M at 25°C & 70%RH, Output to Ground 500VDC	
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 196m/s <sup>2</sup> constant X, Y, Z 1 hour	
Shock	-	<196.1m/s <sup>2</sup>	
Safety Agency Approvals	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark	
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC Class B, VCCI-B	
Weight (Typ)	g	600	720
Size (WxHxD)	mm	42 x 92 x 188	48 x 92 x 203
Warranty	-	5 Years	

**Note:** See Installation Manual for full details, test methods of parameters and application notes.

Model Selector								
Model	Output	Voltage	Adjust. Range	Min Current (A)	Max Current (A)	Load Reg (mV)	Line Reg (mV)	Ripple & Noise (mV)
JWT75-522/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+12V	-	0	4	100	48	150
	V3	-12V	-	0	0.5	150	48	150
JWT75-5FF/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+15V	-	0	3.2	120	60	150
	V3	-15V	-	0	0.5	150	60	150
JWT75-525/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+12V	-	0	4	100	48	150
	V3	-5V	-	0	0.5	100	20	150
JWT100-522/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+12V	-	0	5.5	100	48	150
	V3	-12V	-	0	1	150	48	150
JWT100-5FF/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+15V	-	0	4.5	120	60	150
	V3	-15V	-	0	1	150	60	150
JWT100-525/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+12V	-	0	5.5	100	48	150
	V3	-5V	-	0	1	100	20	150

Options	
Suffix	Description
Blank	Screw terminals, no cover
/A	Screw terminals, cover (Standard US stock item)
/R	Remote On / Off
<b>Example</b>	<b>JWT75-525/RC</b>

**Outline Drawing JWT Series**

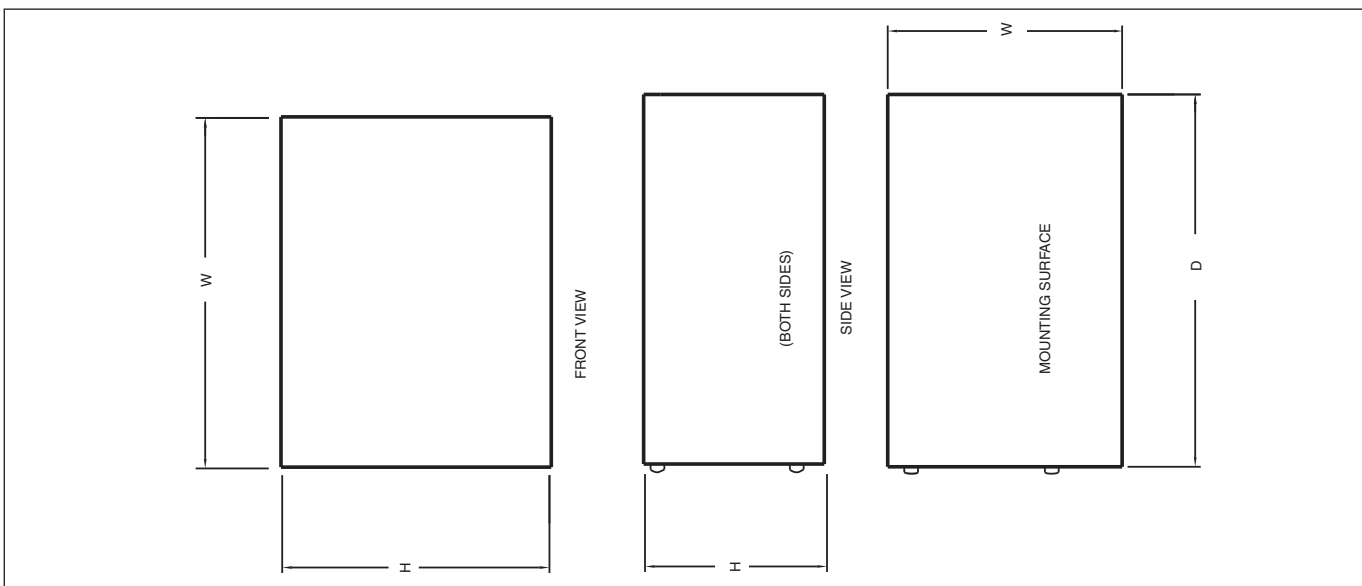



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
tlf.fr.powersolutions@tdk.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
tlf.it.powersolutions@tdk.com  
www.emea.lambda.tdk.com/it



## Netherlands

tlf.nl.powersolutions@tdk.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
tlg.powersolutions@tdk.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
tlg.at.powersolutions@tdk.com  
www.emea.lambda.tdk.com/at



## Switzerland Sales Office

Tel: +41 44 850 53 53  
tlg.ch.powersolutions@tdk.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
tlg.dk.powersolutions@tdk.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
tlu.powersolutions@tdk.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
tli.powersolutions@tdk.com  
www.emea.lambda.tdk.com/il-en



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
tla.powersolutions@tdk.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
tlc.powersolutions@tdk.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tfs.marketing@tdk.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@tdk.com  
www.sg.lambda.tdk.com

