


## 240W 24V Output Power Supply with EN62477-1 OVC III

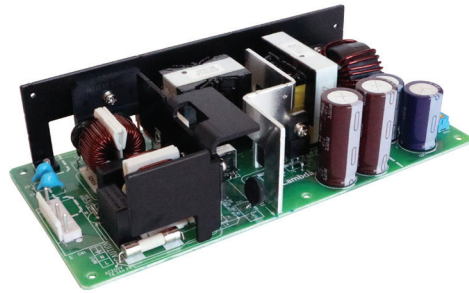

Industrial

The ZWS240RC industrial grade power supplies are used in applications where equipment down-time cannot be tolerated during years of operation. Developed for robotic and machine controllers, the ZWS240RC is certified to EN62477-1 Over Voltage Category (OVC) III. This enables direct connection to the incoming AC distribution panel, saving the cost and space of an isolation transformer. Conservatively rated electrolytic capacitor temperatures offer field life-times of up to 12 years.

Features	Benefits
• Certified to IEC/EN62477-1 OVC III	• Allows Direct Connection to the Distribution Panel
• 12 Year Electrolytic Capacitor Lifetimes	• Improved Field Life
• Convection Cooled	• Reduced Dirt and Dust Contamination
• Curve B Radiated and Conducted EMI	• Easier System Compliance
• 5 year Warranty	• Low Cost of Ownership

Model Selector				
Model	Output Voltage (V)	Adjustment Range (V)	Maximum Current (A)	Maximum Output Power (W)
ZWS240RC-24	24	21.6 - 26.4	10	240

<b>ZWS</b>	<b>240RC</b>	-	<b>24</b>	-						
	240RC = 240W		Output voltage: 24	<table border="1"> <thead> <tr> <th>Suffix</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>Blank</td> <td>Open frame, no remote on/off</td> </tr> <tr> <td>/R</td> <td>Remote on/off</td> </tr> </tbody> </table>	Suffix	Description	Blank	Open frame, no remote on/off	/R	Remote on/off
Suffix	Description									
Blank	Open frame, no remote on/off									
/R	Remote on/off									

Specifications		
Model		ZWS240RC-24
<b>Input</b>		
AC Input Voltage range <sup>(1)</sup>	Vac	85 - 265
Input Frequency	Hz	47 - 63
Input Current (100/200Vac)	A	2.8 / 1.5
Inrush Current at 200Vac (typ) (Cold Start)	A	30
Leakage Current	mA	<0.5
Power Factor (100/200Vac)	-	0.93 / 0.90
Harmonic Compliance	-	Meets IEC61000-3-2
Hold Up Time (typ) at 100/200Vac Input	ms	31
Efficiency (100/200Vac)	-	87 / 90
Conducted & Radiated EMI	-	Conducted: EN55011 / EN55032-B, FCC-B, VCCI-B Radiated: EN55011 / EN55032-A, FCC-A, VCCI-A
Immunity	-	IEC61000-6-2, EN61000-4-2, -3, -4, -5, -6, -8, -11 (See immunity table)
Insulation Class	-	Class I
Safety Certifications and Markings	-	IEC/UL/CSA/EN62368-1, 60950-1, EN62477-1 (OVC III), CE Mark and UKCA Mark

Immunity				
Test	Standard	Test Level	Criteria	Notes
ESD	EN61000-4-2	Air ± 8kV and contact ± 4kV	B	See IEC61000 immunity test report on website
Radiated Susceptibility	EN61000-4-3	80M -1GHz: 10V/m 1.4 - 2.0GHz: 3V/m 2.0 - 2.7GHz: 1V/m	A	
Electrical Fast Transient Burst	EN61000-4-4	± 2kV	B	
Surge	EN61000-4-5	Normal ± 2kV Common ± 4kV	B	
Conducted Susceptibility	EN61000-4-6	10Vrms	A	
Magnetic Fields	EN61000-4-8	30A/m	A	
Voltage Dips	EN61000-4-11	30% 500ms	B	
		60% 200ms	B	
		100% 20ms	B	
		100% 5000ms	B	

<b>Specifications</b>		
Model		ZWS240RC-24
<b>Output</b>		
Output Voltage Adjustment	-	See Model Selector Table
Switching Frequency (Main converter)	kHz	130
Line Regulation	mV	96
Load Regulation	mV	150
External Load Capacitance	uF	Not specified
Ripple & Noise	mV	200
Temperature Coefficient	%/°C	0.02
Minimum Load	-	No minimum load required
Overcurrent Protection	%	>105, constant current limit with automatic recovery
Overvoltage Protection	V	27.6 - 32.4, latching, cycle AC input to reset
Remote Sense	-	-
Remote On/Off	-	Optional, see model selector and instruction manual for details
Parallel Operation	-	Not possible
<b>Environmental</b>		
Operating Temperature <sup>(2)</sup>	°C	-10 to +70, derate linearly to 30% load from 50 to 70
Storage Temperature	°C	-30 to +75
Humidity (non condensing)	%RH	30 - 90 Operating, 10 - 90 storage
Cooling	-	Convection
Altitude	m	5,000
Withstand Voltage (For 1 minute)	Vac	Input to Ground 2,000, Input to Output 3,000, Output to Ground 500
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500VDC
Vibration (Non operating)	-	10-55Hz (Sweep for 1min.) 19.6m/s <sup>2</sup> Constant X,Y,Z 1 hour each
Shock (Non operating)	-	Less than 196m/s <sup>2</sup>
<b>Other</b>		
Weight (Typ)	g	520
Size (LxWxH)	mm	180 x 84 x 42
Size (LxWxH)	Inches	7.09 x 3.31 x 1.65
Connectors	-	JST
MTBF - JEITA RCR-9102B(3)	Hours	216,512
Warranty	Years	5

Notes:


See website for detailed specifications, test methods and installation manual

(1) Derate linearly to 80% load from 90 to 85Vac input

(2) See Instruction manual for further details and mounting orientations

(3) Component count method, ground fixed. Note the JEITA RCR-9102B calculation method produces figures significantly lower than Telcordia

Outline Drawing ZWS240RC

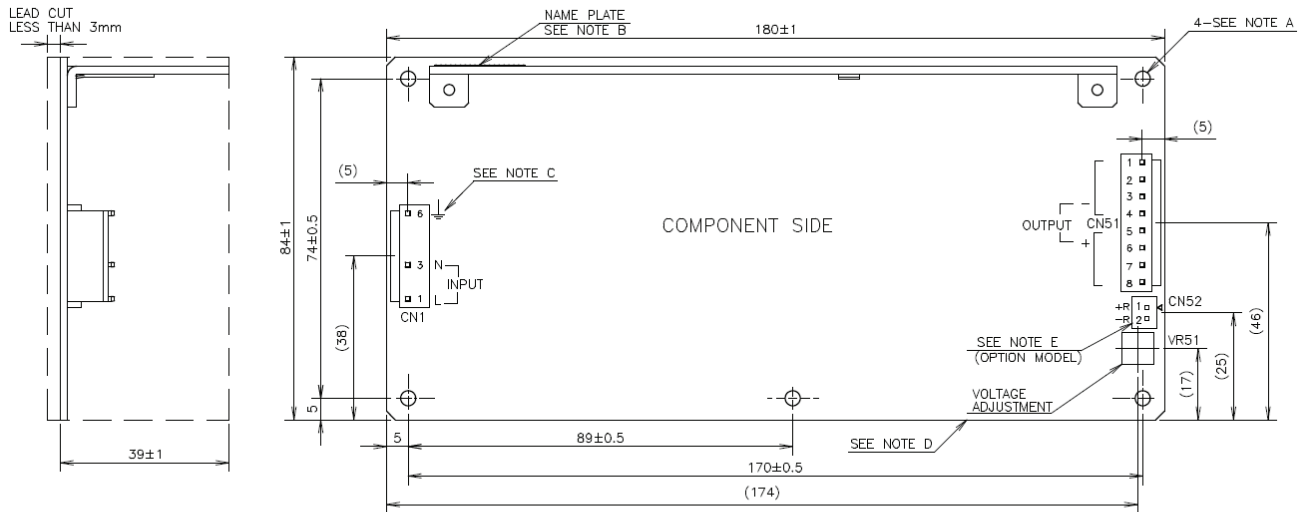

CONNECTORS USED:

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
PIN HEADER (INPUT SIDE CN1)	B3P(6-2.4.5)-VH(LF)(SN)	JST	1
PIN HEADER (OUTPUT SIDE CN51)	B8P-VH(LF)(SN)	JST	1

MATCHING HOUSINGS (NOT INCLUDED WITH THE PRODUCT):

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
SOCKET HOUSING (CN1)	VHR-6N	JST	1
SOCKET HOUSING (CN51)	VHR-8N	JST	1

MATCHING PINS & TOOL (NOT INCLUDED WITH THE PRODUCT):

■ INPUT SIDE (CN1)

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
TERMINAL PINS	SVH-21T-P1.1 BVH-21T-P1.1	JST	3
HAND CRIMPING TOOL	YC-160R	JST	-

■ OUTPUT SIDE (CN51)

DEPEND ON THE REQUIRED OUTPUT CURRENT, SELECT THE TERMINAL PIN (1) OR (2).

(1) WHEN EACH CONNECTOR PIN USED AT OUTPUT CURRENT IS LESS THAN 5A.

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
TERMINAL PINS	SVH-21T-P1.1 BVH-21T-P1.1	JST	8
HAND CRIMPING TOOL	YC-160R	JST	-

(2) WHEN EACH CONNECTOR PIN USED AT OUTPUT CURRENT IS LESS THAN 7A.

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
TERMINAL PINS	SVH-41T-P1.1 BVH-41T-P1.1	JST	8
HAND CRIMPING TOOL	YC-930R	JST	-

NOTES

A: 4- $\phi$ 3.5 HOLES ARE FOR CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.

B: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT, COUNTRY OF MANUFACTURE AND SAFETY MARKING (FOR ONLY APPROVED PRODUCTS) ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

C:  $\perp$  IS PROTECTIVE BONDING TERMINAL.

D: TO KEEP THE DISTANCE MORE THAN 4mm BETWEEN PCB EDGE AND CUSTOMER'S CHASSIS.

E: OPTION MODEL(ZWS240RC-24/R)  
REMOTE ON/OFF CONTROL CONNECTOR (CN52) : B2B-XH-AM (JST)  
MATCHING HOUSING : XHP-2 (JST)  
MATCHING TERMINAL : BXH-001T-P0.6 (JST) OR SXH-001T-P0.6 (JST)  
HAND CRIMPING TOOL : YC-110R (JST) OR YRS-110 (JST)  
MATCHING HOUSING AND TERMINAL --- NOT INCLUDED WITH THE PRODUCT



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



## Netherlands

info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
info@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at



## Switzerland Sales Office

Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
info@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tts.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.sg.lambda.tdk.com

