

HWS3000GT4

A294-01-01

SPECIFICATIONS (1/3)

MODEL			HWS3000GT4	HWS3000GT4	HWS3000GT4	HWS3000GT4	HWS3000GT4	HWS3000GT4			
ITEMS			-24	-48	-60	-80	-130	-250			
INPUT RATING											
Input Voltage Range			(*3)(*13)	-	3 phase 340- 528VAC (47-63Hz)						
Efficiency (Typ.)			(*2)	400/480VAC	%	91	92	92	92	93	93
Input Current (Typ.)			(*2)	400/480VAC	A	5.0	5.0	5.0	5.0	5.0	5.0
Power Factor (Typ.)			(*2)	400VAC	-	0.95					
Leakage Current			(*4)	-	LESS THAN 3.0 mA (480VAC , 60Hz, Star connection)						
OUTPUT RATING											
Nominal Output Voltage				V	24	48	60	80	130	250	
Maximum Output Voltage			(*1)	V	28.8	52.8	66.0	96.0	156.0	300.0	
Maximum Output Current				A	125	62.6	50	37.5	23.2	12	
Maximum Output Power			(*3)	W	3000	3004.8	3000	3000	3016	3000	
CONSTANT VOLTAGE MODE											
Output Voltage Range by adjustment trimmer			(*1)	V	19.2 - 28.8	38.4 - 52.8	48.0 - 66.0	64.0 - 96.0	104.0 - 156.0	200.0 - 300.0	
Output Voltage Range by Programming			(*1)(*5)	V	0 - 28.8	0 - 52.8	0 - 66.0	0 - 96.0	0 - 156.0	0 - 300.0	
Maximum Line Regulation			(*6)	mV	96	192	240	320	520	1000	
Maximum Load Regulation			(*7)	mV	192	384	480	640	1040	2000	
Temperature Coefficient				-	0.02% / °C						
Maximum Ripple & Noise			0 ≤ Ta ≤ 70°C	mVp-p	300	400	500	600	866	1250	
			(*8) -20 ≤ Ta < 0°C	mVp-p	360	480	600	740	1083	1600	
Hold-up Time (Typ.)				-	20ms at 1500W, 10ms at 3000W						
Remote Sensing				-	Possible						
Output Voltage External Control Using CV Terminal				-	Apply external voltage or current : 1 - 5V or 4 - 20mA Output Voltage : 0% - Nominal output voltage						
Output Voltage External Control Using Modbus RTU			(*17)	-	0 - 4,000 (Output Voltage : 0% - Nominal output voltage)						
CONSTANT CURRENT MODE											
Output Current External Control Range			(*1)(*11)	A	0 - 125.0	0 - 62.6	0 - 50.0	0 - 37.5	0 - 23.2	0 - 12.0	
Maximum Line Regulation			(*6)	mA	500	250.4	200	150	92.8	48	
Maximum Load Regulation			(*12)	mA	1000	500.8	400	300	185.6	96	
Temperature Coefficient				-	0.02% / °C						
Output Current External Control Using CC Terminal				-	Apply external voltage or current : 1 - 5V or 4 - 20mA Output Current : 0% - Maximum output Current						
Output Current External Control Using Modbus RTU			(*17)	-	0 - 4,000 Output Current : 0% - Maximum output Current						
PROTECTION											
Over Current Protection			(*9)	A	131.2 <	65.7 <	52.5 <	39.3 <	24.3 <	12.6 <	
Over Voltage Protection			(*10)	V	30.4 - 31.5	56.1 - 58.1	70.2 - 72.6	101.6 - 104.8	165.1 - 170.3	317.5 - 327.5	
ANALOG PROGRAMMING AND MONITORING											
Remote ON/OFF Control				-	Possible						
Parallel Operation			(*14)	-	Possible, Current balancing function is provided						
Series Operation			(*15)	-	Possible, Voltage balancing function is provided						
Output Voltage Monitor using VB terminal			(*16)	-	Output Voltage : 0% - Nominal output voltage VB terminal voltage : 1 - 5V						
Output Current Monitor using CB terminal			(*16)	-	Output Current : 0% - Maximum output Current CB terminal voltage : 1 - 5V						
Monitoring Signal				-	Power Fail(VPF, CPF), AC Fail(ACF) (Open Collector Output)						

SPECIFICATIONS (2/3)

ITEMS		MODEL	HWS3000GT4	HWS3000GT4	HWS3000GT4	HWS3000GT4	HWS3000GT4	HWS3000GT4
			-24	-48	-60	-80	-130	-250
COMMUNICATION								
Digital Communication	(*17)	-	Modbus RTU (RS-485)					
AUXILIARY OUTPUT								
Output Voltage (Typ.)		V	5					
Maximum Output Current		A	2					
ENVIRONMENT								
Operating Temperature	(*18)	-	-20 to +70°C, Guarantee Start up : -40 to -20°C					
Storage Temperature		-	-40°C to +85°C					
Operating Humidity		-	20 to 90%RH (Non Condensing)					
Storage Humidity		-	10 to 95%RH (Non Condensing)					
Vibration	(*19)(*20)	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.					
Shock	(*19)(*20)	-	Less than 196m/s ²					
Cooling	(*21)	-	Forced air cooling (Internal FAN)					
ISOLATION								
Withstand Voltage		-	Input-FG : 2.0kVAC (20mA) for 1min. Input-Output : 3.6kVAC (20mA) for 1min. Input-Signal, AUX : 3.6kVAC (20mA) for 1min. Output-Signal, AUX : 2.0kVAC (20mA) for 1min. Output-FG : 1.5kVAC (20mA) for 1min.					
Isolation Resistance		-	More than 100MΩ at 25°C and 70%RH, Output - FG 500VDC					
STANDARD AND COMPLIANCE								
Safety	(*13)	-	Approved by IEC/EN/UL/CSA 62368-1 (Altitude < 5,000m, Only Star connection) Designed to meet Den-an Appendix 12 (J62368-1)					
Conducted Emission	(*19)	-	Designed to meet EN55011/EN55032-A, FCC-ClassA, VCCI-A					
Radiated Emission	(*19)	-	Designed to meet EN55011/EN55032-A, FCC-ClassA, VCCI-A					
Immunity	(*19)(*22)	-	Designed to meet IEC61000-6-2 (IEC61000-4-2, -3, -4, -5, -6, -8, -11)					
Line DIP	(*19)	-	Designed to meet SEMI-F47 (Accept temporary output voltage drop)					
MECHANICAL								
Weight (Typ.)		kg	2.5					
Size (W x H x D)		mm	150x 61 x 270 (Refer to Outline Drawing)					

SPECIFICATIONS (3/3)

*Read Instruction Manual (A294-04-01_) carefully, before using the power supply unit.

=NOTES=

- *1. When using the product above the nominal output voltage, derate the output current so that the maximum output power is not exceeded. Please refer to Fig. A.
(*a) Limited by maximum output power value
- *2. $T_a=25^{\circ}\text{C}$, nominal output voltage and maximum output power.
- *3. Output derating needed when input voltage less than 360VAC. Please refer to Fig. B.
- *4. Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), $T_a=25^{\circ}\text{C}$.
- *5. Output voltage external control range using CV terminal and communication function.
- *6. 340-528VAC, constant load
- *7. No load - Full load, constant input voltage.
- *8. Please refer to Instruction Manual (A294-04-01_) for measurement of ripple noise voltage.
- *9. Constant current limit with automatic recovery.
If the overcurrent condition continues for more than 30 seconds, the output will shut down.
A dynamic overload, such as an output short circuit, will cause the output to shut down.
- *10. OVP circuit will shut the output down, manual reset.
- *11. Output current external control range using CC terminal and communication function.
- *12. Minimum output voltage - Nominal output voltage, constant input voltage, maximum output current operation.
- *13. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 380 - 480VAC(50-60Hz).
- *14. Up to 10 units
- *15. Up to 3 units (250V : Up to 2 units)
- *16. Use a measuring instrument whose input impedance is 500k Ω or more.
- *17. <Communication function example>
- Control of output voltage and output current. - Remote ON/OFF control.
- Product status can be monitored.
- Operation history can be obtained.(OCP,OVP,AC Fail, etc.) etc.
Refer to instruction manual (A294-04-01_) and communication manual (A291-04-02_).
- *18. Output Derating
- Refer to OUTPUT CURRENT vs. AMBIENT TEMPERATURE (A294-01-02_).
At -40 to -20°C , the electrical characteristics are not guaranteed.
- *19. The specifications are based on TDK-Lambda standard measurement conditions.
The power supply is considered a component which will be installed into a final equipment.
The final equipment should be re-evaluated that it meets EMC, vibration and shock requirement.
- *20. Mounting A only.
- *21. Variable speed fan. Fan noise is 45dB (typ) at 25°C and 70% load.
- *22. Signal and control ports interface cables length: Less than 3m, DC output power port cables length: Less than 30m.

Fig.A


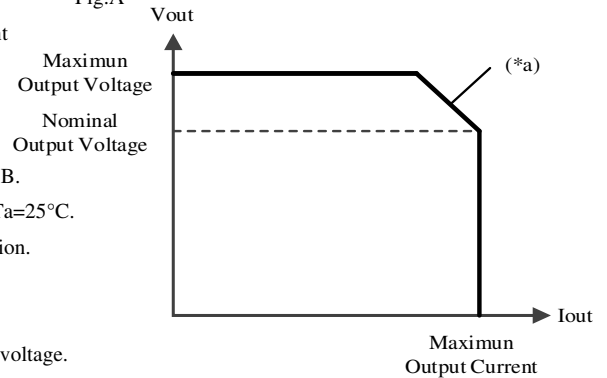


Fig.B

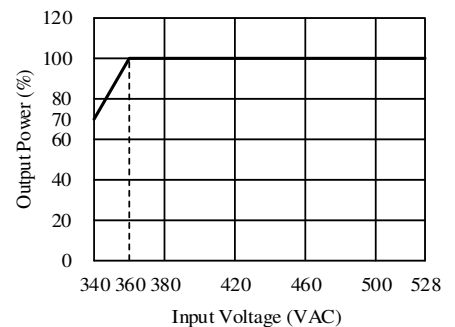


HWS3000GT4

OUTPUT DERATING

A294-01-02

Ta (°C)	OUTPUT CURRENT (%)
	MOUNTING A,B
-20 to +50	100
70	50

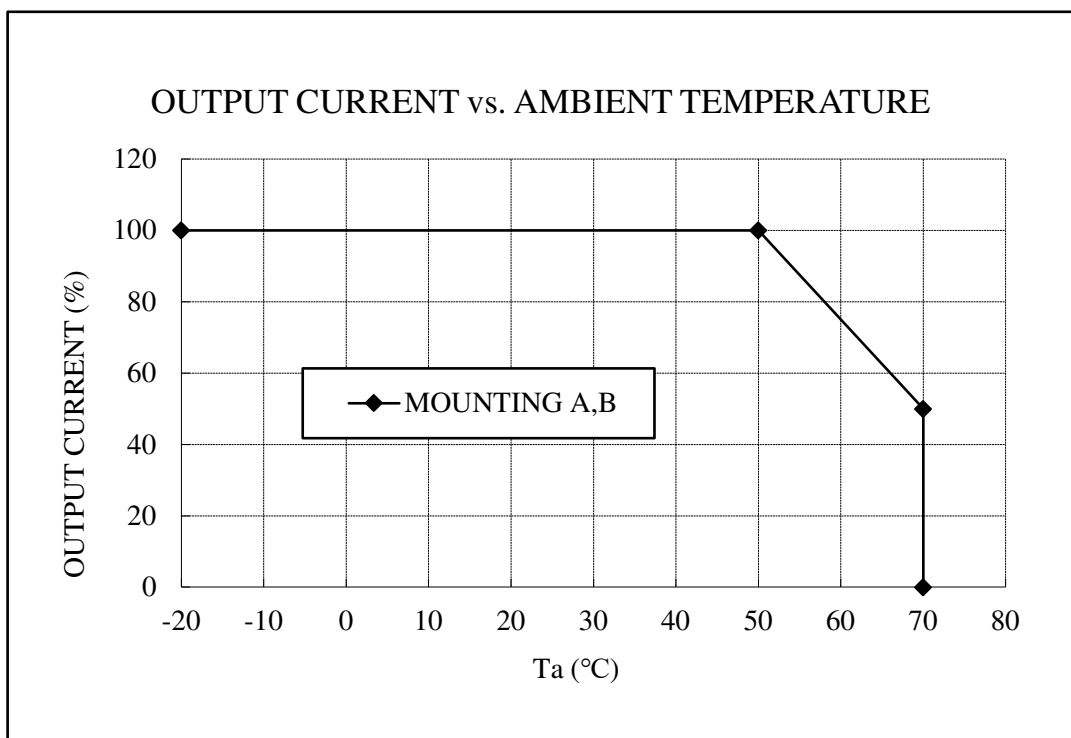

MOUNTING A
(STANDARD MOUNTING)

MOUNTING B

