

JWS150/508

SPECIFICATIONS

A160-01-01/508-B

ITEMS		MODEL	JWS150-24/508
1	Nominal Output Voltage	-	24V
2	Maximum Output Current	-	6.5A
3	Maximum Output Power	-	156W
4	Efficiency (Typ) (*1)	-	80%
5	Input Voltage Range (*2)	-	85 - 265VAC (47-63Hz) or 120 - 330VDC
6	Input Current (100/200VAC)(Typ) (*1)	-	2.0/1.0A
7	Inrush Current(Typ)	-	25A at 100VAC, 50A at 200VAC, Ta=25°C, Cold Start
8	PFHC	-	Designed to meet EN61000-3-2
9	Power Factor (100/200VAC)(Typ) (*1)	-	0.99/0.95
10	Output Voltage Range	-	21.6V-26.4V
11	Maximum Ripple & Noise (*3)	0 - +55°C	150mV
		-10 - 0°C	180mV
12	Maximum Line Regulation (*4)	-	96mV
13	Maximum Load Regulation (*5)	-	150mV
14	Temperature Coefficient	-	Less than 0.02%/°C
15	Over Current Protection (*6)	-	6.82A-
16	Over Voltage Protection (*7)	-	27.6V-32.4V
17	Hold-up Time (Typ) (*8)	-	20ms
18	Leakage Current (*9)	-	0.75mA MAX, 0.2mA(Typ) at 100VAC / 0.44mA(Typ) at 230VAC
19	Remote Sensing	-	Possible
20	Parallel Operation	-	-
21	Series Operation	-	Possible
22	Operating Temperature (*10)	-	-10 - +55°C (-10 - +50°C:100%, +55°C:60%)
23	Operating Humidity	-	30 - 90%RH (No dewdrop)
24	Storage Temperature	-	-30 - +85°C
25	Storage Humidity	-	10 - 95%RH (No dewdrop)
26	Cooling	-	Convection Cooling
27	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (100mA) for 1min
28	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG...500VDC
29	Vibration	-	At no operating, 10-55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1h each.
30	Shock (In package)	-	Less than 196.1m/s ²
31	Safety (*11)	-	Approved by UL508, CSA C22.2 No.14, UL60950-1, CSA C22.2 No.60950-1 & EN60950-1. Designed to meet DENAN.
32	Conducted Emission	-	Designed to meet EN55011/EN55022-B, FCC-ClassB, VCCI-B.
33	Radiated Emission	-	Designed to meet EN55011/EN55022-B, FCC-ClassB, VCCI-B.
34	Weight(Typ)	-	900g
35	Size (W.H.D)	mm	65 x 92 x 198 (Refer to Outline Drawing)

*Read instruction manual carefully, before using the power supply unit.


=NOTES=

- *1. At 100/200VAC, Ta=25°C and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, input voltage range will be 100-240VAC (50/60Hz)
- *3. Measure with JEITA RC-9131 probe, Bandwise of scope :100MHz.
- *4. 85 - 265VAC , constant load.
- *5. No load-Full load, constant input voltage.
- *6. Constant current limit with automatic recovery.
- *7. OVP circuit will shut down output, manual reset (Line recycle).
- *8. At 100/200VAC nominal output voltage and maximum output current.
- *9. Measured by the each measuring method of UL,CSA,EN and DENAN(at 60Hz).
- *10. Ratings - Derating at standard mounting.
 - Load (%) is percent of maximum output power or maximum output current, whichever is greater.
 - As for other mountings, refer to derating curve (A160-01-02/508- _).
- *11. As for DENAN, designed to meet at 100VAC.

OUTPUT DERATING

A160-01-02/508

Ta(°C)	LOAD(%)		
	MOUNTING A	MOUNTING B	MOUNTING C
-10 ~ +30	100	100	100
35	100	80	80
40	100	60	60
50	100	-	-
55	60	-	-

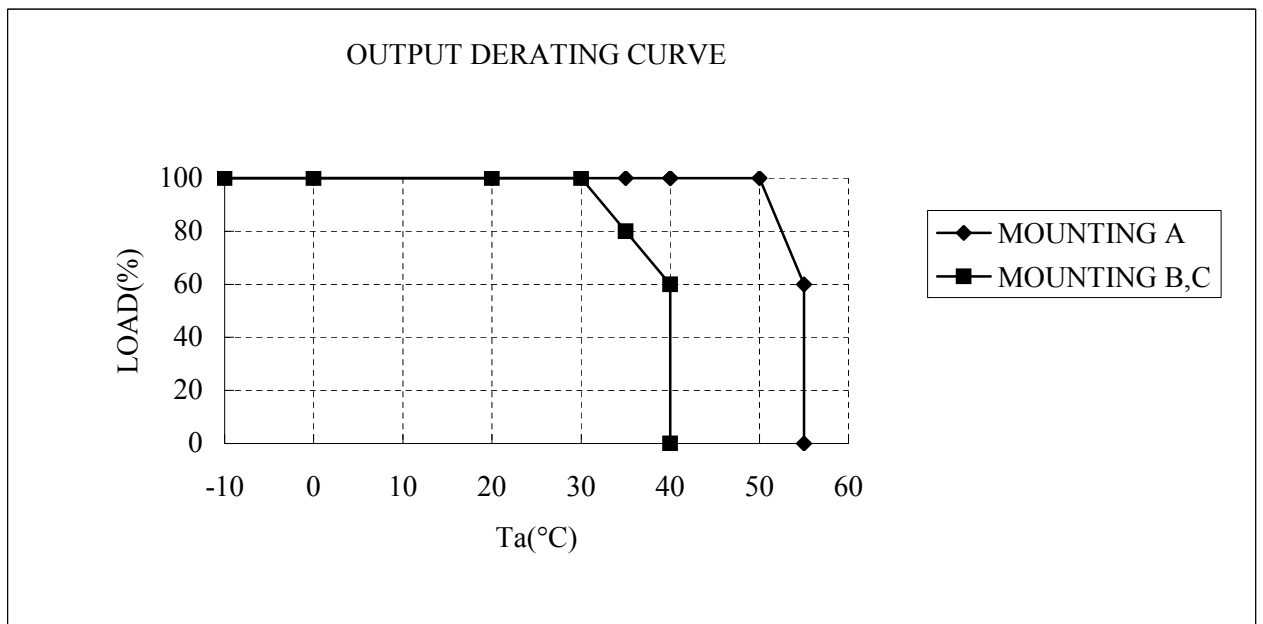

MOUNTING A
(STANDARD MOUNTING)

MOUNTING B

MOUNTING C

DON'T USE

DON'T USE

