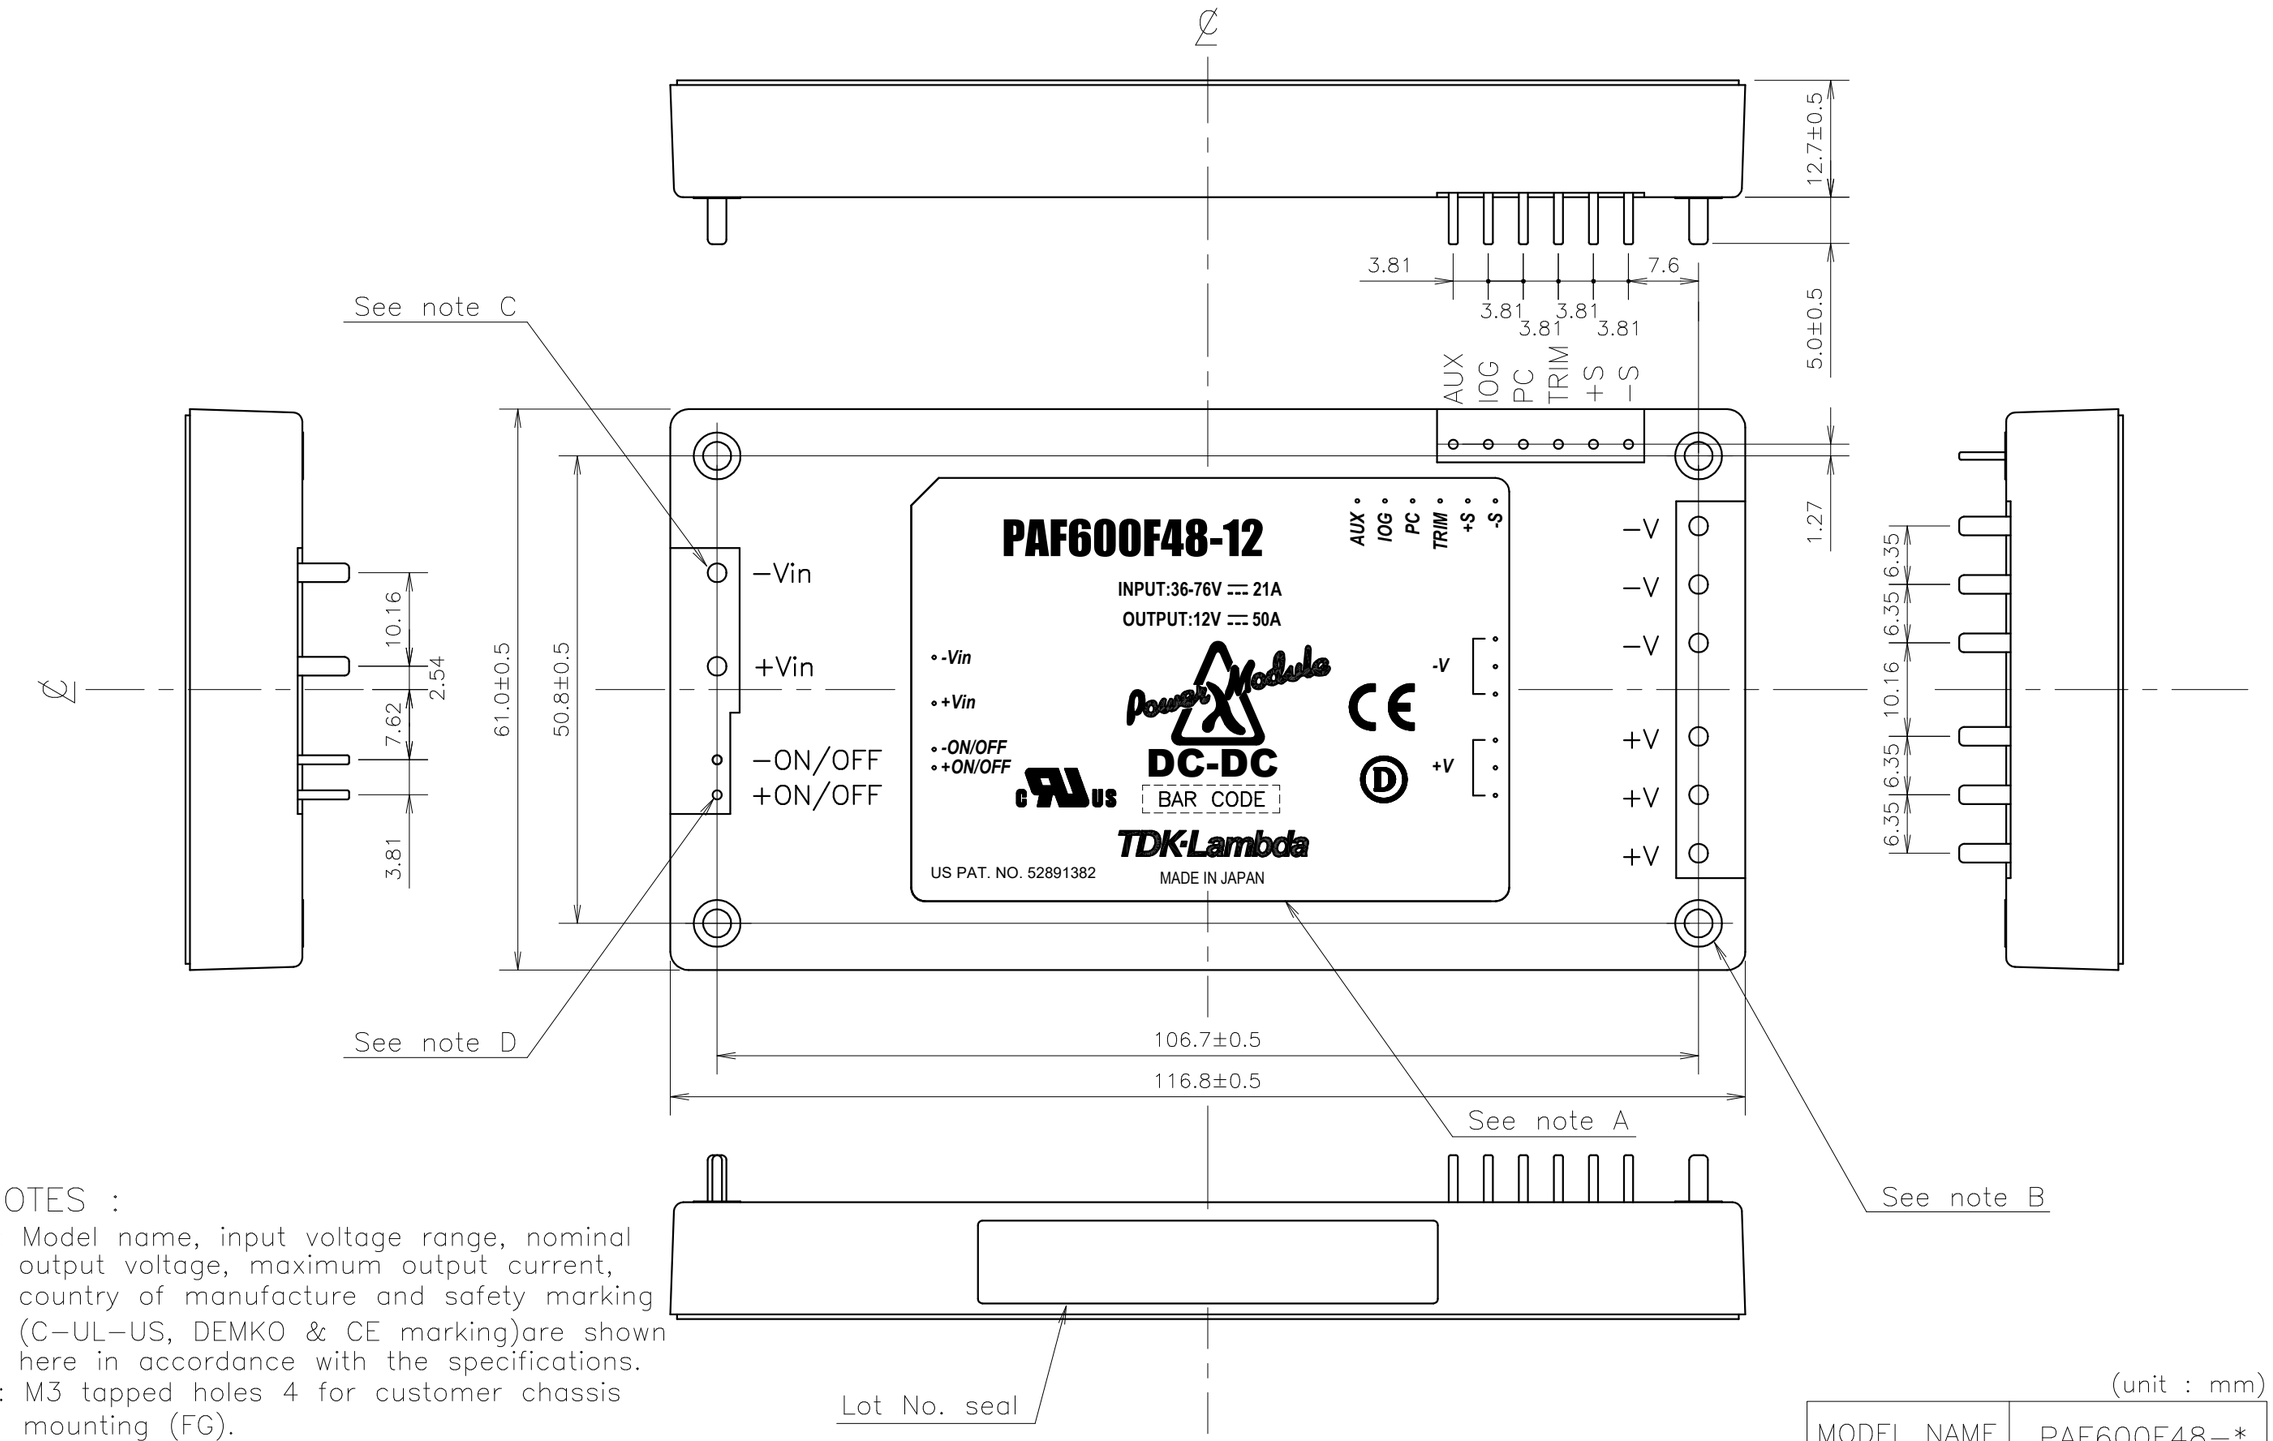


NOTES :

A: Model name, input voltage range, nominal output voltage, maximum output current, country of manufacture and safety marking (C-UL-US, DEMKO & CE marking)are shown here in accordance with the specifications.

B: M3 tapped holes 4 for customer chassis mounting (FG).

C: Input and output terminal : 8-ø2

D: Signal pin : 8-ø1

E: Unless otherwise specified dimensional tolerance : ±0.3

(unit : mm)

| MODEL NAME | PAF600F48-* |
|---|---|
| TDK-Lambda | |

C160-02-01/6-D