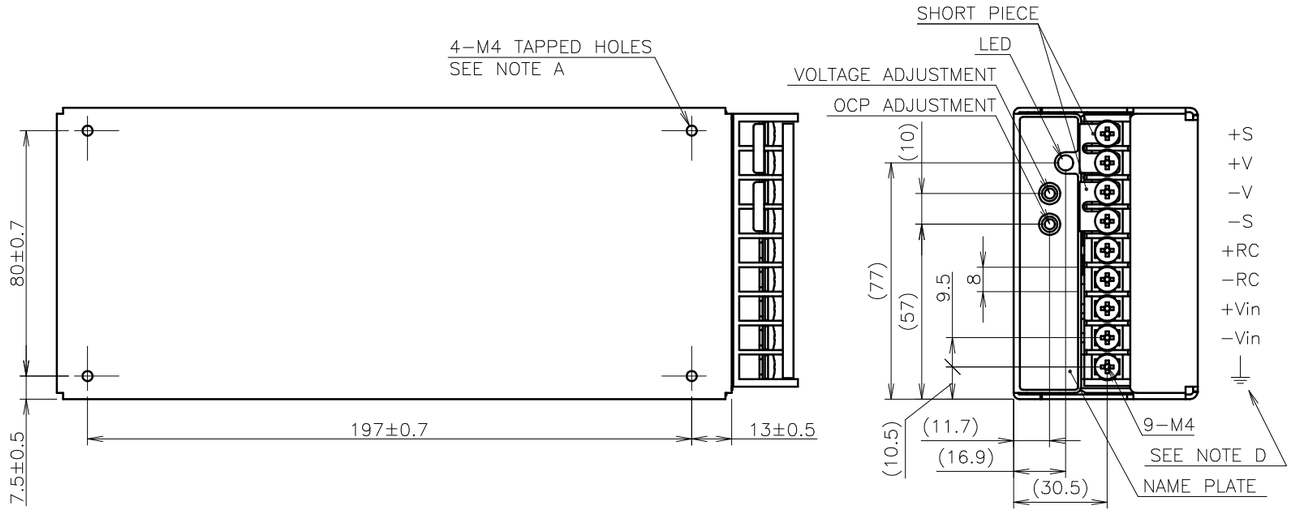

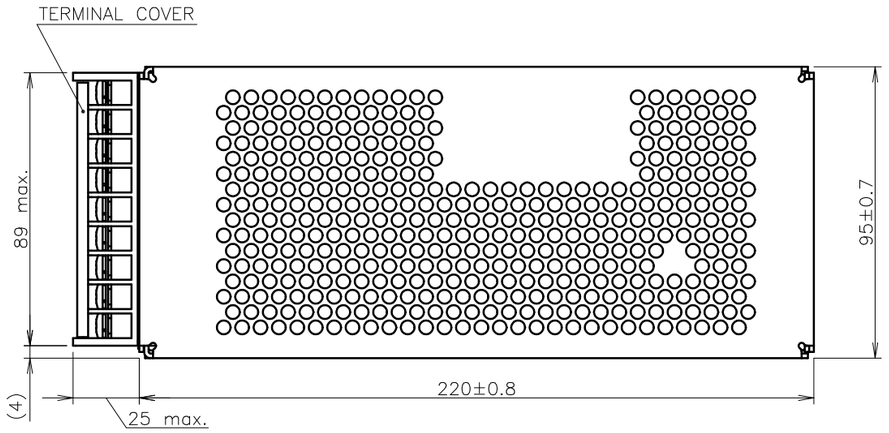

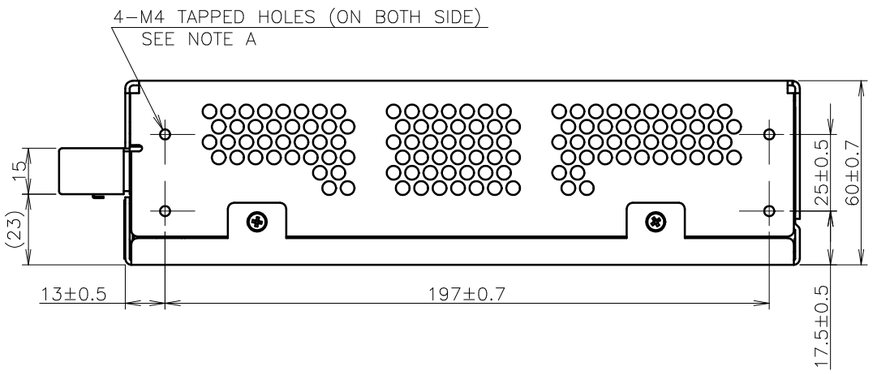

NOTES

A : M4 TAPPED HOLES
12 POINTS FOR CUSTOMER CHASSIS MOUNTING.
SCREWS MUST NOT BE PROTRUDE INTO POWER SUPPLY BY 7mm.

B : MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE,
AND MAXIMUM OUTPUT CURRENT ARE SHOWN HERE
IN ACCORDANCE WITH THE SPECIFICATIONS.

C : COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.

D: ⏚ IS PROTECTIVE BONDING TERMINAL.

TOLERANCE : ±1mm UNLESS OTHERWISE SPECIFIED.

ACCESSORIES

* SHORT PIECE (NET 2) FOR SHORTING PURPOSE
(+S~+V, −S~−V) : MOUNTED AT TIME OF SHIPMENT.
* TERMINAL COVER (NET 1)
(MOUNTED AT TIME OF SHIPMENT)

NAME PLATE

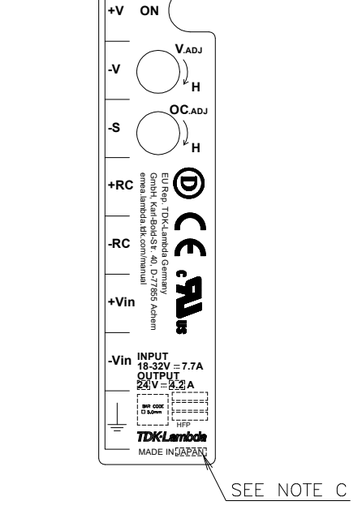

(unit : mm)

MODEL NAME	RDS100A−24
TDK-Lambda	

A282−02−01