



TOLERANCES/±	
1-16mm	0.1
16.1-63mm	0.2
63.1-250mm	0.3
250.1-1000mm	0.5
ANGLE	±0.3°


D	CONTENTS	DATE	ENGR	CHK	APPD
A	△-2 REV.-1	31.MAR.2011			
B	△-4 REV.B1	25.AUG.2011			

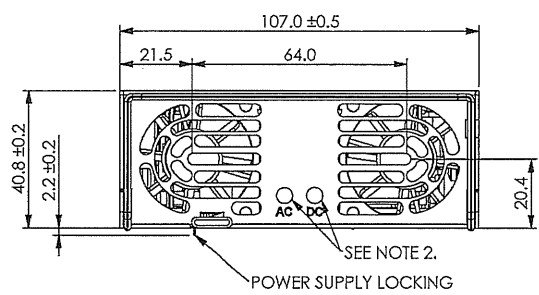


REAR VIEW

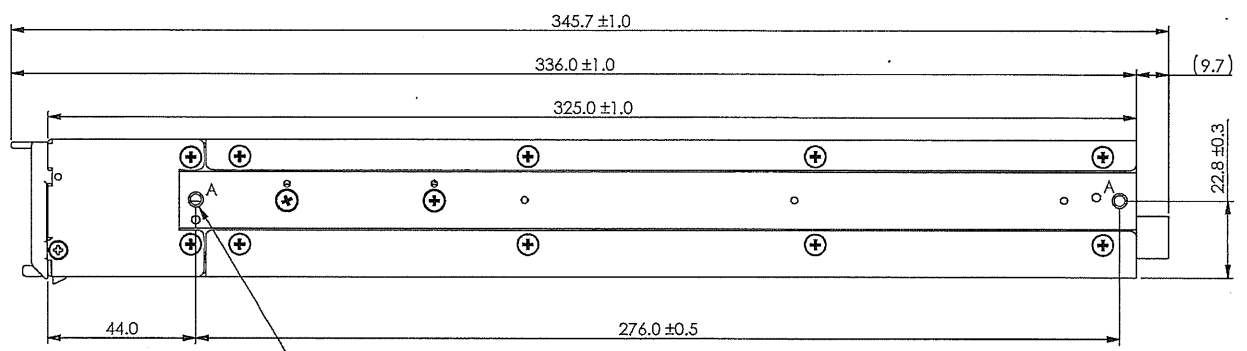

MOUNTING HOLES M4 MARKED "A" 2 HOLES ON EACH SIDE.

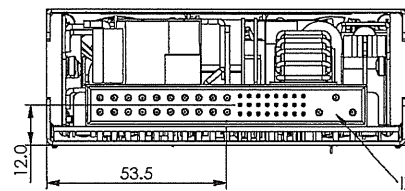

IN/OUT CONNECTOR REAR VIEW



PIN No.	FUNCTION	PIN No.	FUNCTION
A1-A10	-VO	B14	A1
A11-20	+VO	B15	DC_OK
B1	SIGNAL_RTN	B16	A0
B2	PS_EXIST	B17	SDA
B3	+12V_AUX_OUT	B18	TEMP_ALM_SR
B4	-SENSE	B19	V_REF_EXT
B5	A2	B20	SMB_ALERT
B6	CS	B21	AC_FAIL_OUT
B7	ENABLE	B22	5V_Trim
B8	V_PROG	B23	
B9	+SENSE_IN	B24	
B10	A3	C1	GND
B11	I_PROG	C2	NEUTRAL
B12	INHIBIT	C3	LINE
B13	SCL		

EXTRACTION HANDLE SEE NOTE 7.

AIR FLOW DIRECTION

POWER SUPPLY RELEASE KNOB SEE NOTE 7.

HOLES TO FIX A KEY FOR DIFFERENT OUTPUT MODELS. SEE NOTE 6.

SEE NOTE 4

UNCONTROLLED COPY

- NOTES:
- CONNECTOR TYPE: PCIH47M400A1/AA, POSITRONIC. MATES WITH FEMALE CONNECTOR TYPE: PCIH47F400A1/AA
 - LED INDICATORS, REFER TO INSTRUCTION MANUAL.
 - MOUNTING SCREWS MUST NOT PENETRATE MORE THAN 7mm INTO THE UNIT.
 - MODEL NAME, INPUT AND OUTPUT RATING AND SAFETY APPROVAL SYMBOLS ARE DESCRIBED ON TOP SURFACE LABEL.
 - ALLOW MINIMUM 50 mm OF FREE AIR OUTLET AT THE REAR OF THE UNIT. DO NOT OBSTRUCT AIR FLOW TO THE FRONT PANEL.
 - REFER TO MANUAL INSTRUCTION FOR SETTING DETAILS.
 - TO EXTRACT THE POWER SUPPLY, ELEVATE THE RELEASE KNOB AND PULL THE EXTRACTION HANDLE.

DWG	K. ROMAN 25.8.11	SHEET OF	1 1	MATERIALS		TITLE	HFE 2500
ENGR	K. ROMAN 25.8.11	SCALE	NONE			DRAWING No.	OUTLINE DRAWING
CHK	M. P. 25-8-11	UNITS	mm	FINISH			IA689-02-01 - B
APPD	R. George 25 Aug 11						
ISSUED	25 Aug 2011						TDK-Lambda