
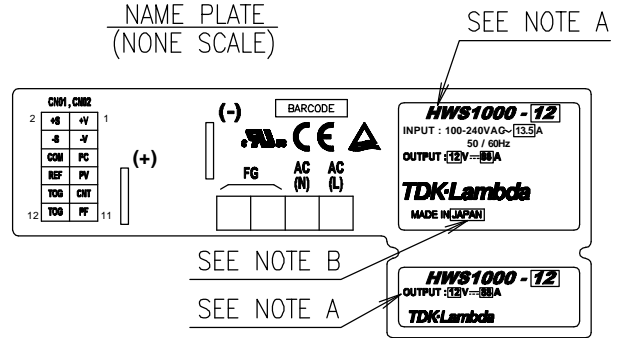


AIR FLOW

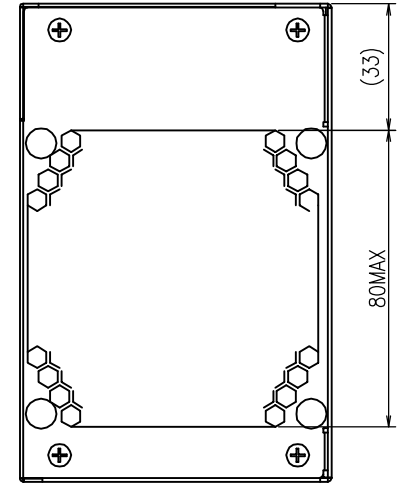

NOTES

- A : MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B : COUNTRY OF MANUFACTURE IS SHOWN HERE.
- C : M4 TAPPED HOLES (16) FOR CUSTOMER CHASSIS MOUNTING. (SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m. RECOMMENDED M4 SCREWS TORQUE : 1.27N·m)
- D : I/O SIGNAL CONNECTOR

CONNECTOR	: S12B-PHDSS(LF)(SN)	(JST)
MATCHING HOUSING	: PHDR-12VS	(JST)
MATCHING CONTACT	: SPHD-002T-P0.5(AWG28~24)	(JST) OR
	: SPHD-001T-P0.5(AWG26~22)	(JST) OR
	: BPHD-001T-P0.5(AWG26~22)	(JST)
HAND CRIMPING TOOL	: YRS-620(SPHD-002T-P0.5)	(JST)
	: YC-610R(SPHD-001T-P0.5)	(JST)
	: YC-610R(BPHD-001T-P0.5)	(JST)


- E : RECOMMENDED TORQUE FOR THE TERMINAL PIECE.

INPUT TERMINAL (M4 SCREW)	: 1.27N·m
OUTPUT TERMINAL (M8 BOLT & NUT)	: 10.8N·m
OUTPUT TERMINAL (M4 SCREW)	: 1.27N·m

ACCESSORIES

- * ATTACHED CONNECTOR
- SHORTING +S~+V, -S~-V, PV~REF & CNT~TOG
- ATTACHED ON CN02 AT SHIPMENT

SIGNAL CONNECTOR INFORMATION

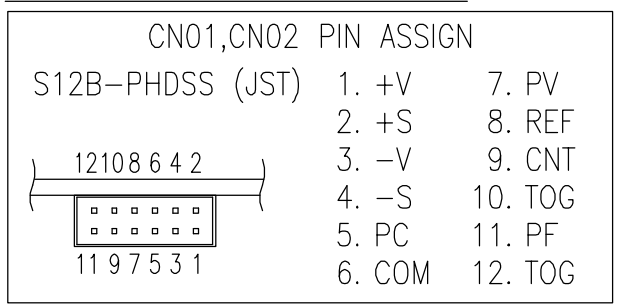

(unit : mm)

MODEL NAME	HWS1000
DENSEI-LAMBDA	