

CONNECTORS USED:

| PART DESCRIPTION             | PART NAME | MANUFACT. | QTY |
|------------------------------|-----------|-----------|-----|
| PIN HEADER (INPUT SIDE CN1)  | B3P5-VH   | J.S.T.    | 1   |
| PIN HEADER(OUTPUT SIDE CN51) | B6P-VH    | J.S.T.    | 1   |
| PIN HEADER(OUTPUT SIDE CN52) | B7P-VH    | J.S.T.    | 1   |


\*OUTPUT CURRENT OF EACH CONNECTOR PIN MUST BE LESS THAN 5A.

MATCHING HOUSINGS, PINS & TOOL (NOT INCLUDED WITH THE PRODUCT):

| PART DESCRIPTION      | PART NAME    | MANUFACT. | QTY |
|-----------------------|--------------|-----------|-----|
| SOCKET HOUSING (CN1)  | VHR-5N       | J.S.T.    | 1   |
| SOCKET HOUSING (CN51) | VHR-6N       | J.S.T.    | 1   |
| SOCKET HOUSING (CN52) | VHR-7N       | J.S.T.    | 1   |
| TERMINAL PINS         | SVH-21T-P1.1 | J.S.T.    | 16  |
|                       | BVH-21T-P1.1 |           |     |
| HAND CRIMPING TOOL    | YC-160R      | J.S.T.    | -   |

NAME PLATE

SEE NOTE C

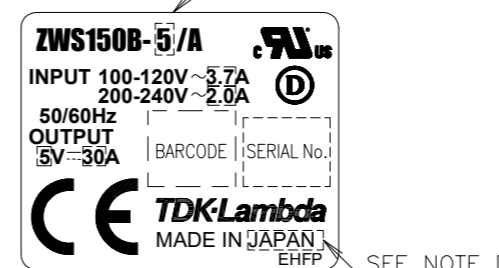

SCALE FOR NAME PLATE : 2/1

NOTES

- A: M4 EMBOSSED TAPPED & COUNTERSINK HOLES (6) ARE FOR CUSTOMER'S CHASSIS MOUNTING.
- B:  $\phi 4.5$  HOLES (3) AND R2.25 SLOT HOLES (2) ARE FOR CUSTOMER'S CHASSIS MOUNTING.
- C: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, AND MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- D: COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.
- E:  $\perp$  IS PROTECTIVE BONDING TERMINAL.

(unit : mm)

|                   |           |
|-------------------|-----------|
| MODEL NAME        | ZWS150B/A |
| <b>TDK-Lambda</b> |           |

A246-02-01/A-B