

# GEN 3300 SERIES

## TEST DATA

### EN61000

DWG: IA626-58-01		
APPD	CHK	DWG
Doron P. Nov-7-06	Doron P. Nov-7-06	DINA 6. Nov 06

## INDEX

## PAGE

1. Electro-Static Discharge Test EN61000-4-2 .....	R-1
2. Radiated Susceptibility Test EN61000-4-3.....	R-2
3. Electrical Fast Transient Burst Test EN61000-4-4.....	R-3
4. Surge Test EN61000-4-5.....	R-4
5. Conducted Susceptibility Test EN61000-4-6.....	R-5
6. Input Current Harmonics Test EN61000-3-2.....	R-6
7. Immunity to Magnetic Field Test EN61000-4-8.....	R-7
8. Voltage Dips and Short Interruption Test EN61000-4-11.....	R-8

The above data is typical value.

The values are considered to be actual capability data.

**NEMIC-LAMBDA**

# 1. ELECTRO-STATIC DISCHARGE TEST (EN61000-4-2)

(1) Equipment used:


ESD simulator system: SCHAFFNER NSG435  
 Discharge resistance: 330 Ohm Capacity: 150pF

(2) Test conditions:

Input voltage:	Rated	Output voltage:	Rated
Output current:	100%	Polarity:	-,+
Number of tests:	10 times	Discharge interval:	>1 Second

(3) Test method and Device test point:

Contact discharge: FG, Case screw  
 Air discharge: Input and Output terminal

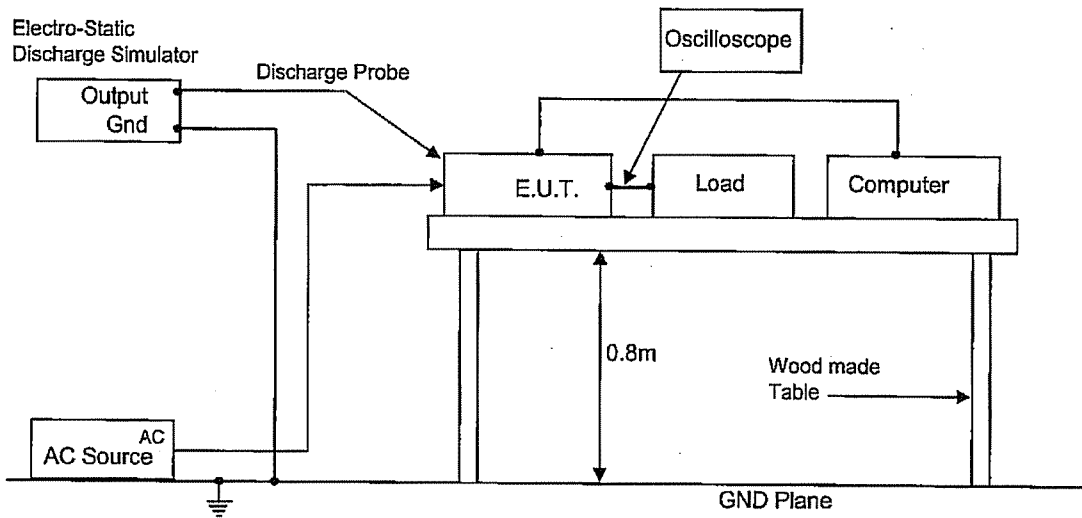

(4) Acceptable conditions:

1. Output voltage regulation not to exceed  $\pm 5\%$  of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(5) Test Result:

Contact Discharge (Kv)	GEN8-400	GEN60-55	GEN600-5.5	Air Discharge (Kv)	GEN8-400	GEN60-55	GEN600-5.5
2	PASS	PASS	PASS	4	PASS	PASS	PASS
4	PASS	PASS	PASS	8	PASS	PASS	PASS


**2. ELECTROMAGNETIC RADIATION SUSCEPTIBILITY TEST  
(EN61000-4-3)**

(1) Equipment used:

- |   |                              |
|---|------------------------------|
| Anechoic test chamber                                   | Hermon Labs AC-2             |
| Antenna, biconical, high power 20-300MHz, 1kW           | A.H.Systems inc. SAS-200/543 |
| Antenna, double-ridged waveguide horn, 1-18GHz, 300W    | EMC Test Systems 3115        |
| Synthesized RF signal generator, 10kHz-1.05GHz          | Fluke 6061A                  |
| Monitor, field, 10kHz-1GHz, 1-300V/m, w/fiberoptic      | Amplifier Research FM1000    |
| Coupling-decoupling network according to ENV 50141 (S1) | Hermon Labs 50141S1          |
| RF amplifier, 10kHz-220MHz, 150W                        | Amplifier Research 150L      |
| RF amplifier, 500MHz to 1000MHz, 120W                   | Hermon Labs A-120            |
| RF amplifier, 1 to 4 GHz, 55W                           | Milmega AS 0104-55/55B       |
| RF power meter  | Boonton 4200                 |

(2) Test conditions:

- |                            |   |                      |           |
|----------------------------|---|----------------------|-----------|
| Input voltage:             | Rated   | Output voltage:      | Rated     |
| Output current:            | 100%  | Amplitude Modulated: | 80%, 1kHz |
| Electromagnetic Frequency: | 80~1000MHz  | Ambient temperature: | 25°C      |
| Sweep Condition:           | 1.5 x 10 <sup>-3</sup> Decade/Second, 1.0 Second Hold |                      |           |

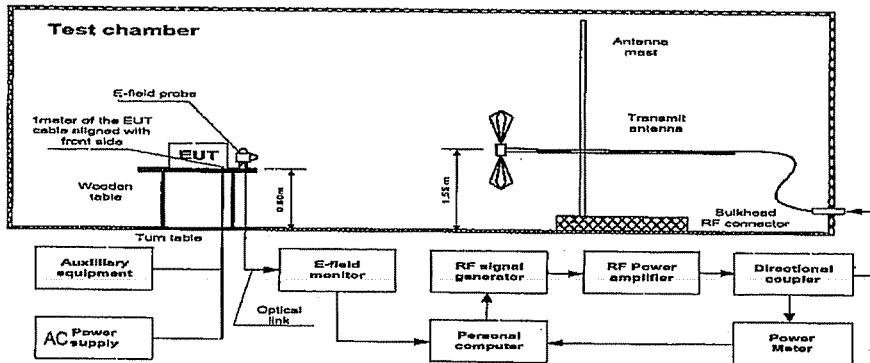

(3) Acceptable conditions:

1. Output voltage regulation not to exceed ± 5% of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(4) Test Result:

Radiated Field Strength (V/m)	GEN8-400	GEN60-55	GEN600-5.5
1	PASS	PASS	PASS
2	PASS	PASS	PASS
3	PASS	PASS	PASS

### 3. ELECTRICAL FAST TRANSIENT BURST TEST (EN61000-4-4)

(1) Equipment used:


EFT/B Generator: SCHAFFNER NSG2025

(2) Test conditions:

Input voltage:	Rated	Output voltage:	Rated
Output current:	100%	Test time:	1minute
Polarity:	-,+	Ambient temperature:	25°C
Number of tests:	3 times		

(3) Test method and Device test point: N, L, FG

Apply to N, L, FG separately, as well as, all at the same time.

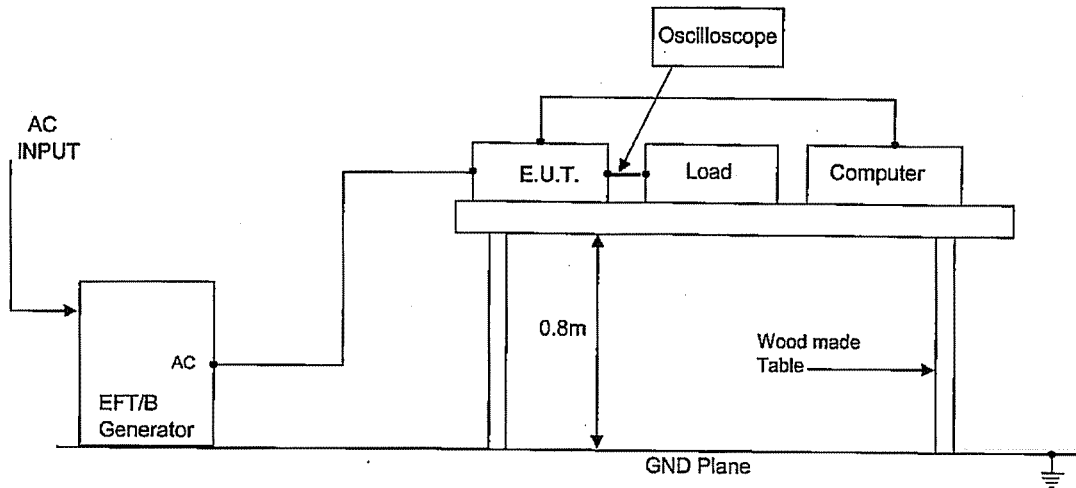

(4) Acceptable conditions:

1. Output voltage regulation not to exceed  $\pm 5\%$  of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(5) Test Result:

Test Voltage (kV)	Repetition Rate (kHz)	GEN8-400	GEN60-55	GEN600-5.5
0.5	5	PASS	PASS	PASS
1	5	PASS	PASS	PASS


**4. SURGE TEST  
(EN61000-4-5)**

(1) Equipment used:

Surge Generator: SCHAFFNER- NSG651  
 Coupling impedance: Common - 12 OHm  
 Normal - 2 OHm  
 Coupling capacitance: Common - 9uF  
 Normal - 18uF  
 Coupling network: SCHAFFNER- CDN110

(2) Test method and device test point:

Input voltage: Rated                      Output voltage: Rated  
 Output current: 100%                      Number of tests: 5 times  
 Polarity: -,+                                  Mode: Common, Normal  
 Phase: 0,90 DEG.                              Ambient temperature: 25°C

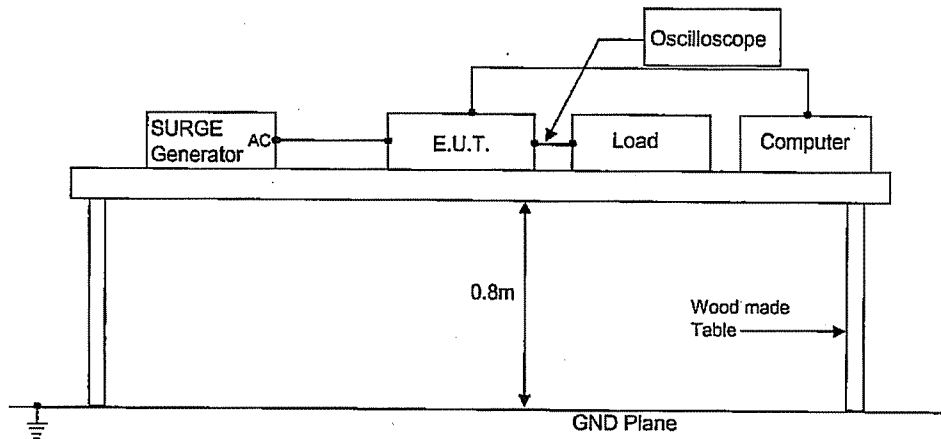

(3) Acceptable conditions:

1. Output voltage regulation not to exceed  $\pm 5\%$  of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(4) Test Result:

Test Voltage (kV) Common	GEN8-400	GEN60-55	GEN600-5.5	Test Voltage (kV) Normal	GEN8-400	GEN60-55	GEN600-5.5
0.5	PASS	PASS	PASS	0.5	PASS	PASS	PASS
1.0	PASS	PASS	PASS	1.0	PASS	PASS	PASS
2.0	PASS	PASS	PASS				

**5. CONDUCTED SUSCEPTIBILITY TEST  
(EN61000-4-6)**

**(1) Equipment used:**


RF Signal Generator 9kHz-1.2GHz  
RF Amplifier 10kHz-220MHz, 150W  
Coupling/Decoupling Network  
Coupling/Decoupling Network  
Attenuator 6 dB, 150W, DC-1000MHz,  
with 230VAC/12VDC adapter

Marconi Instruments 2023  
Amplifier Research, 150L  
HL 230-M3  
HL 230-M2  
HL 6-150

**(2) Test Condition:**

Input voltage: Rated                      Output voltage: Rated  
Output current: 100%                      Electromagnetic  
Frequency: 150kHz~80MHz  
Sweep Condition: 1.0% Step Up, 2.0 Seconds Hold  
Ambient temperature: 25°C

**(3) Test Method:**

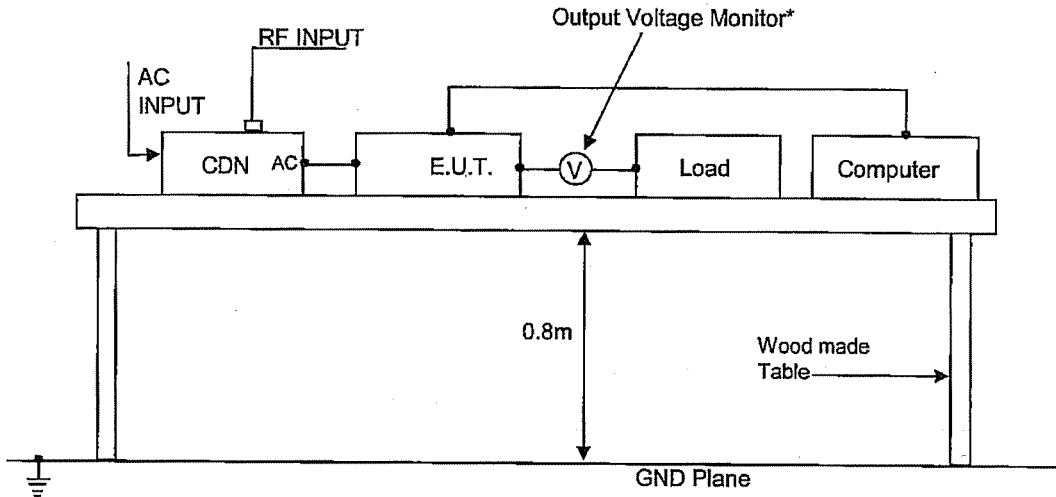

\*Used Oscilloscope or Analog Voltage Meter

**(4) Acceptable conditions:**

- 1. Output voltage regulation not to exceed ± 5% of initial (before test) value during test.
- 2. Output voltage to be within regulation specification after the test.
- 3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

**(5) Test Result:**



Voltage Level (V)	GEN8-400	GEN60-55	GEN600-5.5
1	PASS	PASS	PASS
2	PASS	PASS	PASS
3	PASS	PASS	PASS

## 6. INPUT CURRENT HARMONICS TEST (EN61000-3-2, Class A)

Model: GEN3300W SINGLE PHASE INPUT.

- |   |  |
|---|--|
| <p>(1) Equipment used:<br/>                 AC Power Analyser:<br/>                 PACS-1(California Instruments)<br/>                 AC Source:<br/>                 Model 6590 (Chroma)</p> | <p>(2) Test conditions:<br/>                 Input voltage: 230VAC<br/>                 Output current: 100%</p> |
|---|--|

(3) Test Method:

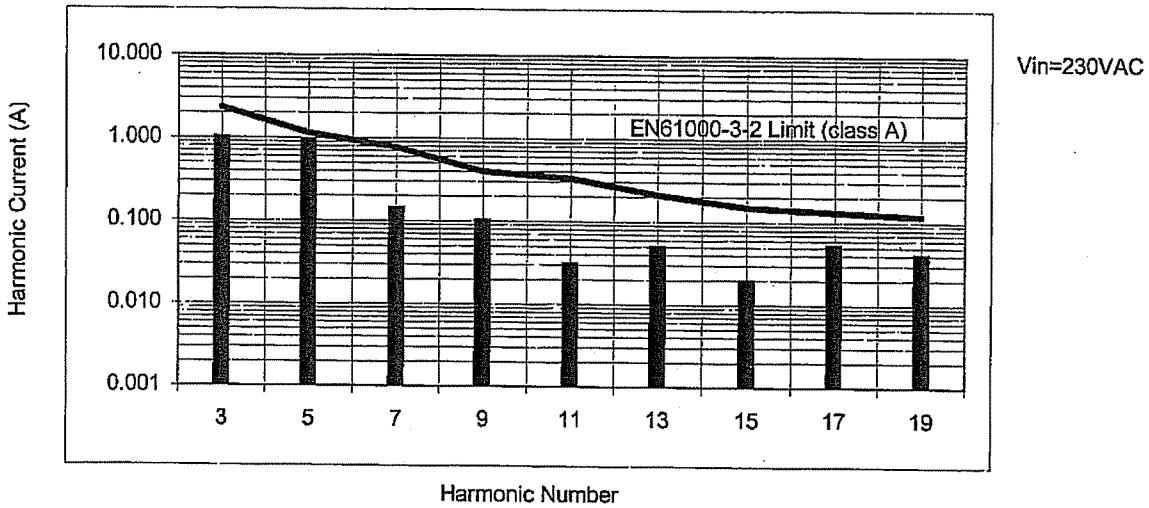

	HARMONICS								
	3	5	7	9	11	13	15	17	19
EN61000-3-2 Limit (A)	2.3	1.14	0.77	0.4	0.33	0.21	0.15	0.132	0.118
Measured Harmonics (A)	1.026	0.969	0.143	0.102	0.031	0.051	0.02	0.053	0.041




**7. IMMUNITY TO MAGNETIC FIELD  
(EN61000-4-8)**

(1) Equipment used:

Current Generator: F-1000-4-8-125A FCC  
 Magnetic Loop: F-1000-4-8/9/10-L-1M FCC

(2) Test Condition:

Input voltage: Rated  
 Output current: 100%  
 Output voltage: Rated  
 Ambient temperature: 25°C

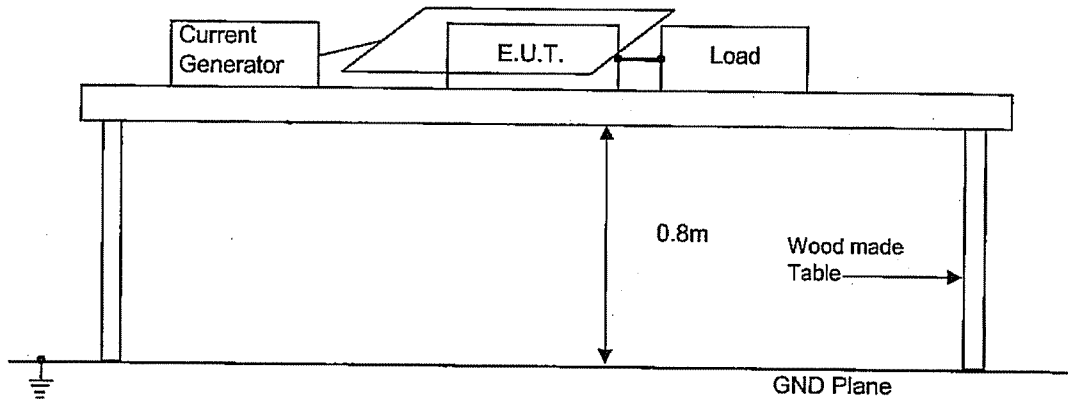

(3) Acceptable conditions:

1. Output voltage regulation not to exceed  $\pm 5\%$  of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(4) Test Result:

Position	Strenght of magnetic field (A/m)	Resoult
Vertical	1	PASS
Vertical at 90 <sup>0</sup>	1	PASS
Horizontal	1	PASS

## 8. VOLTAGE DIPS AND SHORT INTERRUPTION

### (EN61000-4-11)

(1) Equipment used:


Surge Generator:	UCS500 -M4	EM TEST
AC Power Source:	UCS500 -M4	EM TEST

(2) Test Condition:

Input voltage: Rated  
 Output current: 100%  
 Output voltage: Rated  
 Ambient temperature: 25°C  
 Number of tests: 3 Times.

(3) Test method and device test point:

Voltage dip: 0.5 period, reduction of > 95% of  $U_t$   
 Voltage dip: 25 periods, reduction of 30% of  $U_t$ .  
 Voltage interruptions: 250 periods, reduction of > 95% of  $U_t$ .

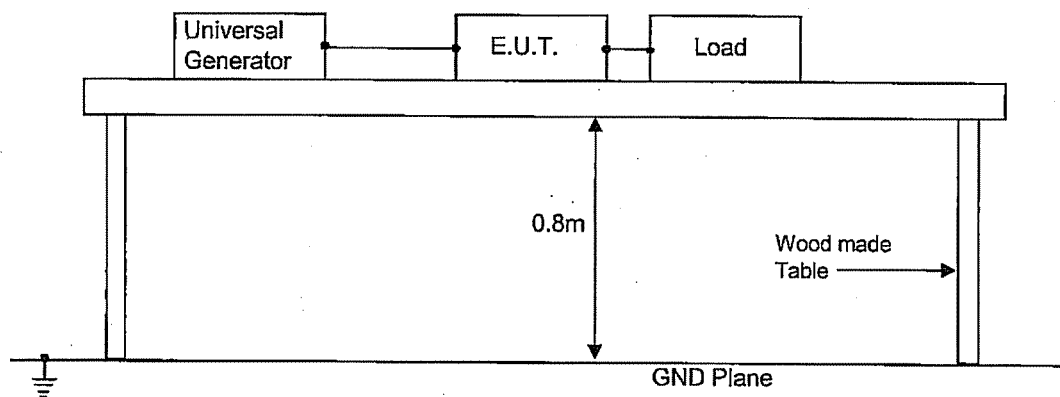

(4) Acceptable conditions:

1. Output voltage to be within output voltage regulation specification after the test.
2. No discharge of fire or smoke.

(5) Test Result:

Test level	DIP rate	Continue time	GEN60-55
5%	95%	10ms	PASS (criteria A)
70%	30%	500ms	PASS (criteria B)
5%	95%	5000ms	PASS (criteria B)