

SPECIFICATIONS

DA032-01-01/HD-G

MODEL		HWS1000	HWS1000	HWS1000	HWS1000	HWS1000	HWS1000	HWS1000	HWS1000	HWS1000	HWS1000	HWS1000	
ITEMS		-3/HD	-5/HD	-6/HD	-7/HD	-12/HD	-15/HD	-24/HD	-36/HD	-48/HD	-60/HD		
1	Nominal Output Voltage	V	3.3	5	6	7.5	12	15	24	36	48	60	
2	Maximum Output Current	A	200	200	167	134	88	70	46	30.7	23	18.4	
3	Peak output Current (*13)	at 200VAC	A	-	-	-	160	100	80	58.5	39	29.2	23.4
4	Maximum Output Power	W	660	1000	1002	1005	1056	1050	1104	1104	1104	1104	
5	Peak Output Power (*13)	at 200VAC	W	-	-	-	1200	1200	1200	1404	1404	1404	1404
6	Efficiency (Typ) (*1)	at 100VAC	%	71	76	79	80	82	83	85	85	86	85
		at 200VAC	%	73	78	81	82	85	85	87	88	88	88
7	Input Voltage Range (*2)	-	85 - 265VAC (47 - 63Hz) or 120 - 330VDC										
8	Input Current (100/200VAC)(Typ) (*1)	A	9.6/5.0	13.5/7.0									
9	Inrush Current (100/200VAC)(Typ) (*3)	A	20/40										
10	PFHC	-	Designed to meet IEC6100-3-2										
11	Power Factor (100/200VAC)(Typ) (*1)	-	0.98/0.95										
12	Output Voltage Range	V	2.64-3.96	4.0-6.0	4.8-7.2	6.0-9.0	9.6-14.4	12.0-18.0	19.2-28.8	28.8-43.2	38.4-52.8	48.0-66.0	
13	Maximum Ripple & Noise (*4)	0 - +71°C	mV	120	120	150	150	150	150	150	200	200	400
		-10 - 0°C	mV	160	160	180	180	180	180	180	240	500	600
14	Maximum Line Regulation (*5)	mV	20	20	36	36	48	60	96	144	192	240	
15	Maximum Load Regulation (*6)	mV	40	40	60	60	100	120	150	150	300	360	
16	Temperature Coefficient	-	Less than 0.02% / °C										
17	Over Current Protection (*7)	-	105% - (Maximum Output Current)				105% - (Peak Output Current)						
18	Over Voltage Protection (*8)	V	4.12-4.62	6.25-7.0	7.5-8.4	9.37-10.5	15.0-17.4	18.7-21.8	30.0-34.8	45.0-49.7	55.2-60.0	69.0-75.0	
19	Hold-up Time (Typ) (*9)	-	20ms										
20	Leakage Current (*10)	-	1.2mA MAX at 100VAC / 240VAC										
21	Remote Sensing	-	Possible										
22	Remote ON/OFF control	-	Possible										
23	Monitoring Signal	-	PF(Open Collector Output)										
24	Output Voltage External Control	-	Possible										
25	Parallel Operation	-	Possible										
26	Series Operation	-	Possible										
27	Operating Temperature (*11)	-	-10 - + 71, Guarantee Start up -40 - -10°C										
		-10 - +40°C	%	100									
		+50°C	%	83.9	100								
		+71°C	%	50	50								
28	Operating Humidity	-	10 - 90%RH (No Condensing)										
29	Storage Temperature	-	-40 - +85°C										
30	Storage Humidity	-	10 - 95%RH (No Condensing)										
31	Cooling	-	Forced Air By Blower Fan										
32	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (300mA), (60V model 651VAC(390mA)), Output - CNT:100VAC (100mA) for 1min.										
33	Isolation Resistance	-	More than 100Mohm Output - FG ... 500VDC More than 10Mohm Output - CNT ... 100VDC at 25°C and 70%RH										
34	Vibration (*14)	-	At no operating, 10 - 55Hz (Sweep for 1min.)										
		(*15)	-	19.6m/s ² Constant, X,Y,Z 1h each. Designed to meet MIL-STD-810F 514.5 Category 4 figure 514.5C-1, category 10									
35	Shock (In package) (*15)	-	Less than 196.1m/s ² Designed to meet MIL-STD-810F 516.5 Procedure I										
36	Safety (*12)	-	Approved by UL60950-1, CSA60950-1, EN60950-1, EN50178. Designed to meet DENAN.										
37	Line DIP	-	Designed to meet SEMI-F47 (200VAC Line only)										
38	Conducted Emission	-	Designed to meet EN55011/EN55022-B, FCC-ClassB, VCCI-ClassB, CISPR-ClassB.										
39	Radiated Emission	-	Designed to meet EN55011/EN55022-B, FCC-ClassB, VCCI-ClassB, CISPR-ClassB.										
40	Immunity	-	Designed to meet IEC61000-4-2(Level 2,3), -3(Level 3), -4(Level 3), -5(Level 3,4), -6(Level 3), -8(Level 4), -11										
41	Weight	g	MAX 3200										
42	Size (W x H x D)	mm	126.5 x 82 x 240 (Refer to Outline Drawing)										
43	Other	-	PCB Coating on solder side and component side.										


*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- *1. At Ta=25°C and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA,EN) are required, input voltage range will be 100 - 240VAC(50/60Hz).
- *3. First in-rush current. Not applicable to the first 0.2ms in-rush current flowing into the power supply noise filter.
- *4. Measure with JEITA RC-9131A probe, Bandwidth of scope :100MHz.
(at 100uF electric capacitor and 0.47uF film capacitor on the test fixture board.)
- *5. 85 - 265VAC , constant load.
- *6. No load-Full load, constant input voltage.
- *7. Constant current limit with automatic recovery. Over current condition for more than 5 seconds will cause the output to shutdown.
Output current exceeding maximum rated output current for more than 10 seconds continuously will result to output shutdown.
- *8. OVP circuit will shut down output, manual reset (Power cycle) or ON/OFF CNT signal reset.
- *9. At 100/200VAC, nominal output voltage and maximum output current.
- *10. Measured by the each measuring method of UL, CSA, EN and DENAN(at 60Hz), Ta=25°C.
- *11. Ratings - Derating at standard mounting.
- Load (%) is percent of maximum output power or maximum output current, whichever is greater.
- As for other mountings, refer to derating curve (DA032-01-02/HD-).
- For conditions of start up at -40°C - -10°C, refer to derating curve (DA032-01-03/HD-).
- *12. As for DENAN, designed to meet at 100VAC.
- *13. Peak output current is less than 10 seconds, and duty 35% max.(200VAC Line only)
- *14. Category 4 exposure levels : Truck transportation over U.S. highways.
- *15. It is compulsory to fix BRACKET onto product for MIL-STD-810F 514.5 and MIL-STD-810F 516.5. Refer to DA032-01-04/HD-.

OUTPUT DERATING




3, 5V Ta(°C)	6-60V Ta(°C)	LOAD(%)	
		MOUNTING A,B,C,D	
		85V	90V~
-10 ~+40	-10 ~+50	80	100
71	71	40	50

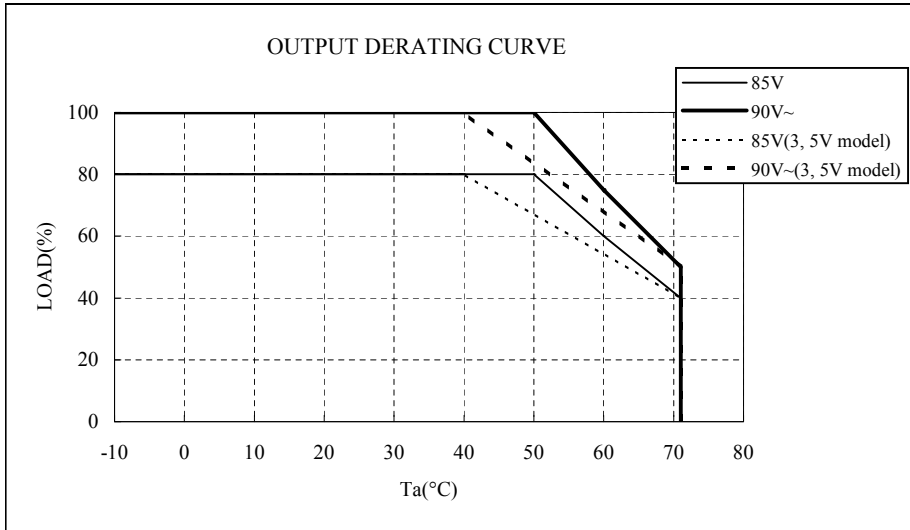

MOUNTING A
(STANDARD MOUNTING)




MOUNTING B

MOUNTING C

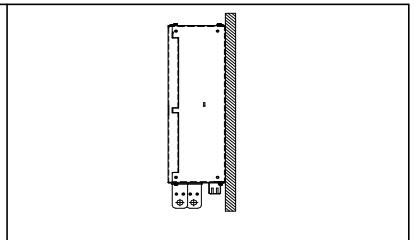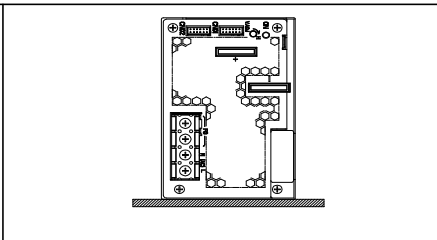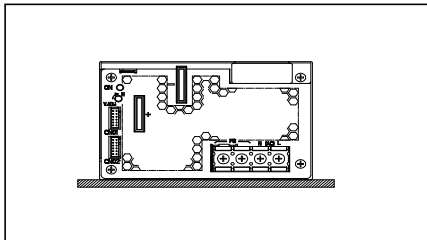

MOUNTING D


Inhibit

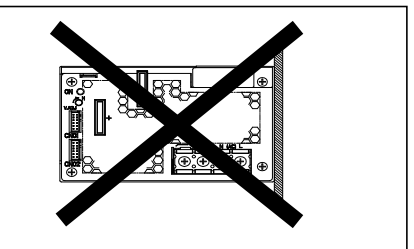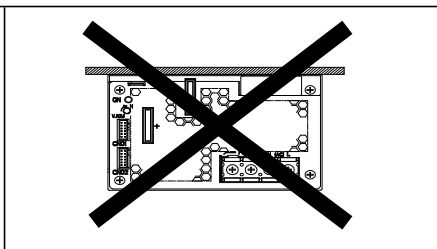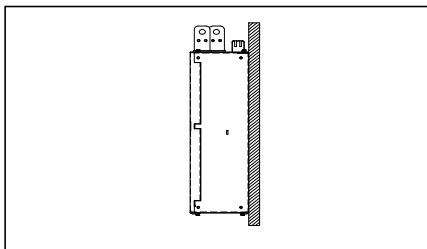

OUTPUT DERATING FOR START UP GUARANTEE

Ta(°C)	LOAD(%)	
	MOUNTING A,B,C,D	
	85V	90V~
-40 ~ -20	40	40
-20	80	100
-10	80	100

OUTPUT DERATING CURVE

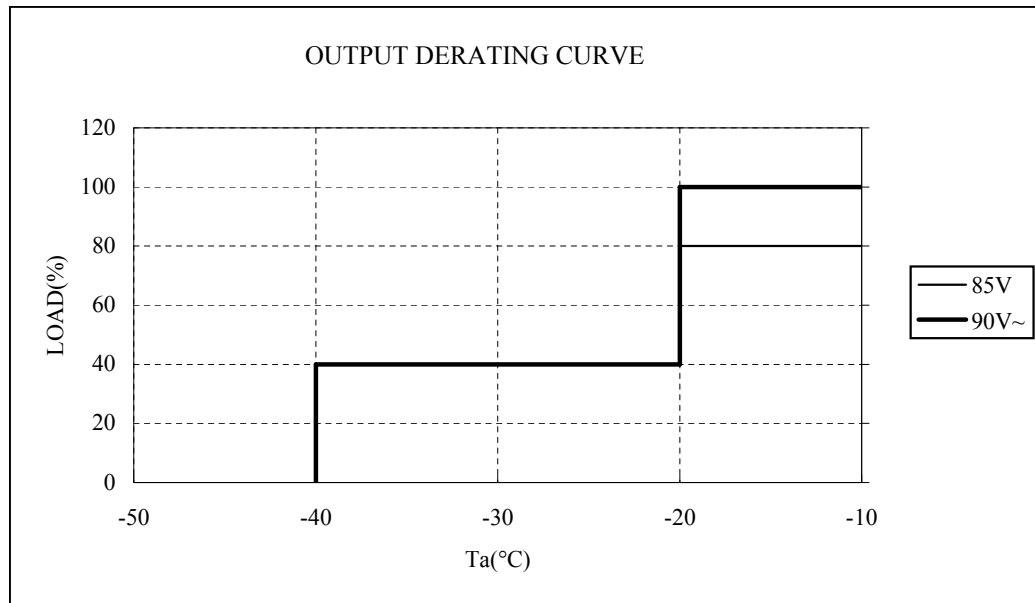

==NOTES==

- *1. Input voltage : Not gradual start up.
- *2. No condensing.

HWS1000/HD

DA032-01-04/HD-A

POWER SUPPLY MOUNTING FOR MIL-STD

When MIL vibration(MIL-STD-810F 514.5 Category 4 figure 514.5C-1, Category 10) & MIL shock(MIL-STD-810F 516.5 Procedure I) specification is necessary, mount the power supply using the BRACKET or equivalent.

Fix one set of BRACKET to the power supply with sixteen M4 screws when mounting the power supply.

Two pieces of BRACKET is considered as one set.

The M4 screw is 8mm in length, washer and spring washer are also required.

Screw must not penetrate into power supply by more than 6mm.

