

HWS30A

SPECIFICATIONS

A256-01-01A

ITEMS		MODEL	HWS30A -3	HWS30A -5	HWS30A -12	HWS30A -15	HWS30A -24	HWS30A -48	
1	Nominal Output Voltage	V	3.3	5	12	15	24	48	
2	Maximum Output Current	A	6	6	2.5	2	1.3	0.65	
3	Maximum Output Power	W	20.0	30.0	30.0	30.0	31.2	31.2	
4	Efficiency (Typ.) (*1)	100VAC	%	75	80	84	85	86	86
		200VAC	%	77	82	86	87	88	87
5	Input Voltage Range (*2)	-	85 - 265VAC (47 - 63Hz) or 120 - 370VDC						
6	Input Current (Typ.) (*1)	A	0.5/0.3	0.65/0.4					
7	Inrush Current (Typ.) (*1)(*3)	-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start						
8	PFHC	-	Designed to meet IEC61000-3-2						
9	Output Voltage Range	V	2.97 - 3.96	4.0 - 6.0	9.6 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8	
10	Maximum Ripple & Noise	0≤Ta≤70°C	mV	120	120	150	150	150	200
		-10≤Ta<0°C	mV	160	160	180	180	180	240
11	Maximum Line Regulation (*5)	mV	20	20	48	60	96	192	
12	Maximum Load Regulation (*6)	mV	40	40	96	120	150	240	
13	Temperature Coefficient	-	Less than 0.02% / °C						
14	Over Current Protection (*7)	A	6.3 ≤	6.3 ≤	2.62 ≤	2.1 ≤	1.36 ≤	0.68 ≤	
15	Over Voltage Protection (*8)	V	4.13 - 4.95	6.25 - 7.25	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8	
16	Hold-up Time (Typ.) (*1)	-	20ms						
17	Leakage Current (*9)	-	Less than 0.5mA. 0.2mA (Typ) at 100VAC / 0.4mA (Typ) at 230VAC						
18	Remote Sensing	-	-						
19	Parallel Operation	-	-						
20	Series Operation	-	Possible						
21	Operating Temperature (*10)	-	-10 to +70°C (-10 to +50°C:100%, +60°C:60%, +70°C:40%)						
22	Operating Humidity	-	30 to 90%RH (No Condensing)						
23	Storage Temperature	-	-30 to +85°C						
24	Storage Humidity	-	10 to 95%RH (No Condensing)						
25	Cooling	-	Convection Cooling						
26	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min						
27	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC						
28	Vibration	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.						
29	Shock	-	Less than 196.1m/s ²						
30	Safety	-	Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1 (Expire date of 60950-1 : 20/12/2020) Designed to meet Den-an Appendix 8 at 100VAC only.						
31	Line DIP	-	Designed to meet SEMI-F47 (200VAC Line only)						
32	Conducted Emission (*11)	-	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B						
33	Radiated Emission (*11)	-	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B						
34	Immunity (*11)	-	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11						
35	Weight (Typ.)	-	200g						
36	Size (W x H x D)	mm	26.5 x 82 x 95 (Refer to Outline Drawing)						

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.

*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).

*3. Not applicable for the inrush current to Noise Filter for less than 0.2ms.

*4. Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.

For start up at low ambient temperature and low input voltage, output ripple noise might not meet specification.

However, specification can be met after one second.

*5. 85 - 265VAC, constant load.

*6. No load-Full load, constant input voltage.

*7. Hiccup with automatic recovery.

Avoid to operate at over load or short circuit condition.

*8. OVP circuit will shut down output, manual reset (Re power on).

*9. Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C.

*10. Output Derating

- Derating at standard mounting. Refer to OUTPUT DERATING CURVE (A256-01-02_).

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

*11. The power supply is considered a component which will be installed into a final equipment.


The final equipment should be re-evaluated that it meets EMC directives.

HWS30A

OUTPUT DERATING

A256-01-02

Ta (°C)	LOAD (%)
	MOUNTING A, B, C, D
-10 - +50	100
60	60
70	40

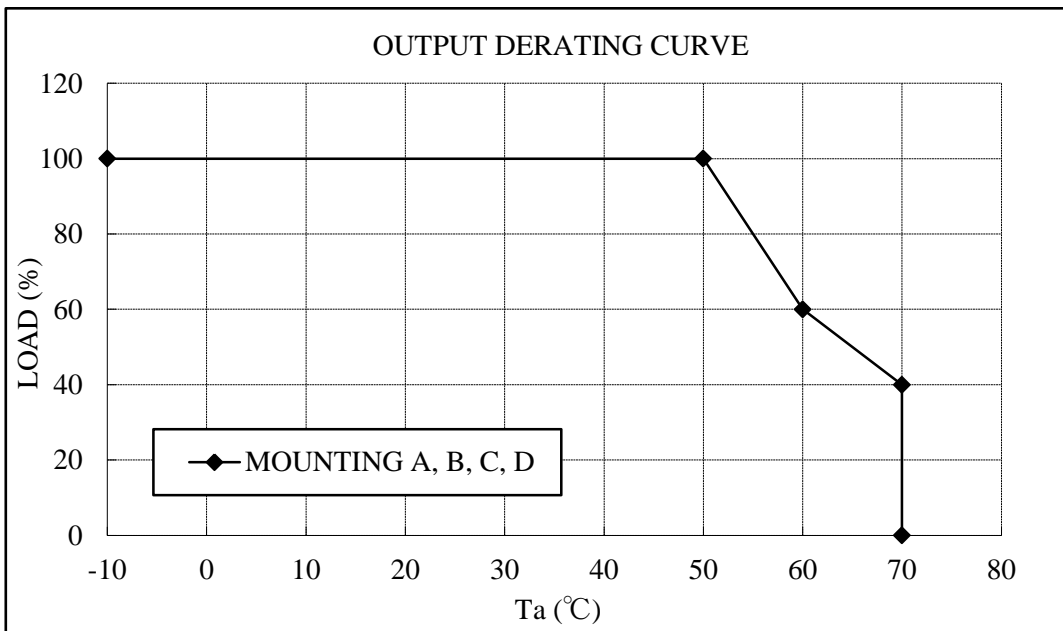

MOUNTING A
(STANDARD MOUNTING)

MOUNTING B

MOUNTING C

MOUNTING D

DON'T USE

