

Inductors for power circuits **Wound ferrite HPL** series(for automotive)











HPL8012060F1 type













FEATURES

- O Achieved high-reliability inductors without joints
- O Adoption of ferrites made of LowLoss material and low-RDC by frame forming
- Magnetic flux cancellation realizes low EMI
- Operating temperature range: -55 to +155°C (including self-temperature rise)
- Ocmpliant with AEC-Q200

APPLICATION

O ADAS - Level5 For CPU/GPU power line

PART NUMBER CONSTRUCTION

HPL		PL	8012060		F1		R22		M		RD3P	
,	Series	name		mensions x6.0 mm		ernal ode		tance H)		tance		ernal ode

CHARACTERISTICS SPECIFICATION TABLE

L	Measuring DC resistance frequency		Rated current*				Part No.		
				Isat 1		Isat 2		Itemp	
(nH) Tolerance	(kHz)	$(m\Omega)$ max.	(mΩ)typ.	(A)25deg.C	(A)125deg.C	(A)25deg.C	(A)125deg.C	(A)typ.	
220 ±20%	100	0.55	0.50	75.0	60.0	78.0	62.5	45.0	HPL8012060F1R22MRD3P
330 ±20%	100	0.55	0.50	47.0	38.0	49.0	39.5	45.0	HPL8012060F1R33MRD3P


^{*} Rated current: smaller value of either lsat or Itemp.


Itemp: When based on the temperature increase (temperature increase of 40°C by self heating)

Measurement equipment

Measurement item	Product No.	Manufacturer		
L	4294A	Keysight Technologies		
DC resistance	3541	HIOKI		
Rated current Isat	3260B	Wayne Kerr Electronics		

^{*} Equivalent measurement equipment may be used.






Isat 1: When based on the inductance change rate (20% below the initial value)

Isat 2: When based on the inductance change rate (30% below the initial value)



HPL8012060F1 type

■ L FREQUENCY CHARACTERISTICS

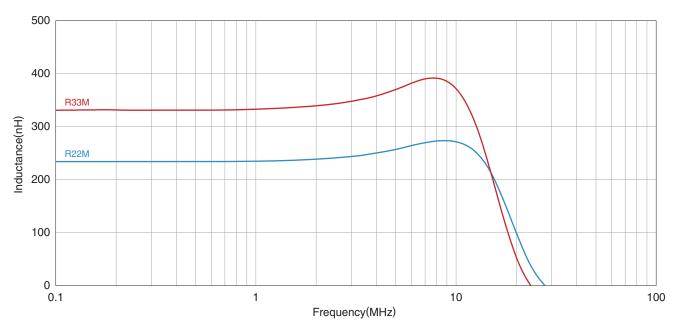


Measurement equipment

Product No.	Manufacturer
4294A	Keysight Technologies

^{*} Equivalent measurement equipment may be used.

L VS. DC BIAS CHARACTERISTICS

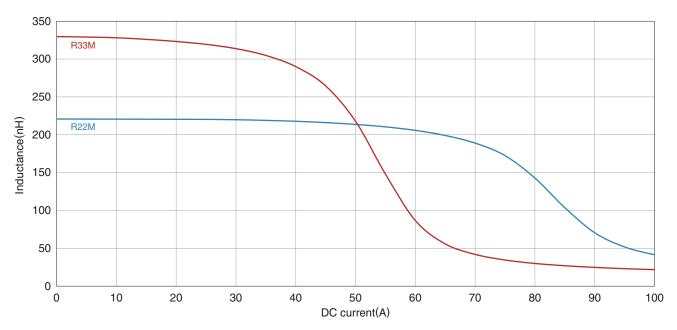

Measurement equipment


Product No.	Manufacturer
3260B	Wayne Kerr Electronics

^{*} Equivalent measurement equipment may be used.




HPL8012060F1 type

■ SHAPE & DIMENSIONS

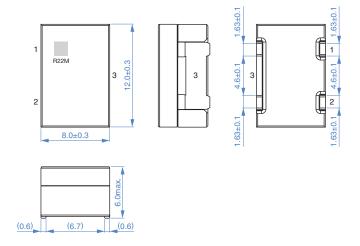


■ PACKAGING STYLE

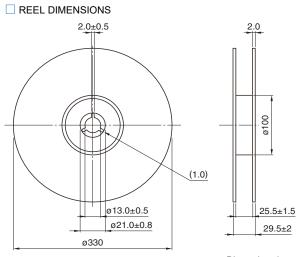


Dimensions in mm

■ RECOMMENDED LAND PATTERN




☐ TAPE DIMENSIONS

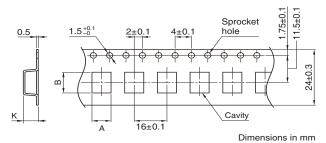

Туре	Α	В	K
HPL8012060F1	(8.5)	(12.5)	(6.3)

☐ PACKAGE QUANTITY	
Package quantity	500 ncs/reel

RECOMMENDED REFLOW PROFILE

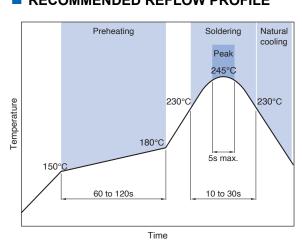

■ TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating temperature range *	Storage temperature range **	Individual weight
-55 to +155 °C	-55 to +155 °C	2.6 a

^{*} Operating temperature range includes self-temperature rise.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

^{**} The storage temperature range is for after the assembly.



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products

REMINDERS

 The storage period is within 12 months. Be sure to follow t less). 	he storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH o
If the storage period elapses, the soldering of the terminal el	ectrodes may deteriorate.
 Soldering corrections after mounting should be within the rail If overheated, a short circuit, performance deterioration, or li 	·
On not use products that have received any excessive mech	nanical shock such as by being dropped.
 When embedding a printed circuit board where a chip is moverall distortion of the printed circuit board and partial distortion. 	unted to a set, be sure that residual stress is not given to the chip due to the rtion such as at screw tightening portions.
 Self heating (temperature increase) occurs when the power design. 	er is turned ON, so the tolerance should be sufficient for the set therma
On not expose the products to magnets or magnetic fields.	
 The performance of the product may deteriorate if coating ma factor into consideration. 	aterials are used, thus please assess the situation beforehand by taking this
On not use for a purpose outside of the contents regulated in	n the delivery specifications.
·	neral electronic equipment (AV equipment, telecommunications equipment oment, personal equipment, office equipment, measurement equipment n.
· · · · · · · · · · · · · · · · · · ·	requirements of the applications listed below, whose performance and/o , or whose failure, malfunction or trouble could cause serious damage to
If you intend to use the products in the applications listed be set forth in the each catalog, please contact us.	elow or if you have special requirements exceeding the range or conditions
(1) Aerospace/aviation equipment	(7) Transportation control equipment
(2) Transportation equipment (electric trains, ships, etc.)	(8) Public information-processing equipment

- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment

- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.