




RFE2500

IEC 61000 TEST DATA

DWG: IA746-58-01		
APPD	CHK	DWG
 29/5/16	 26/05/16	 26.05.16

INDEX	PAGE
1.Electrostatic Discharge Immunity Test (IEC61000-4-2)	R-1
2.Radiated Radio-Frequency Electromagnetic Field Immunity Test (IEC61000-4-3)	R-2
3.Electrical Fast Transient / Burst Immunity Test (IEC61000-4-4)	R-3
4.Surge Immunity Test (IEC61000-4-5)	R-4
5.Conducted Disturbances Induced by Radio-Frequency Field Immunity Test (IEC61000-4-6)	R-5
6.Power Frequency Magnetic Field Immunity Test (IEC61000-4-8)	R-6
7.Voltage Dips,Short Interruptions Immunity Test (IEC61000-4-11)	R-7
8.Input Current Harmonics Test (IEC61000-3-2)	R-8

Test results are typical data.Nevertheless the following results are considered to be actual capability data because all units have nearly the same characteristics.

1. Electrostatic Discharge Immunity Test (IEC61000-4-2)

(1) Equipment used

NOISEKEN ESS-2000

Discharge resistance: 330 Ohm Capacity: 150pF


(2) Test conditions

Input voltage:	Rated	Output voltage:	Rated
Output current:	100%	Polarity:	-, +
Number of tests:	10 times	Discharge interval:	>1 Second

(3) Test method and Device test point

Contact discharge: FG, Case screw

Air discharge: Input and Output terminal

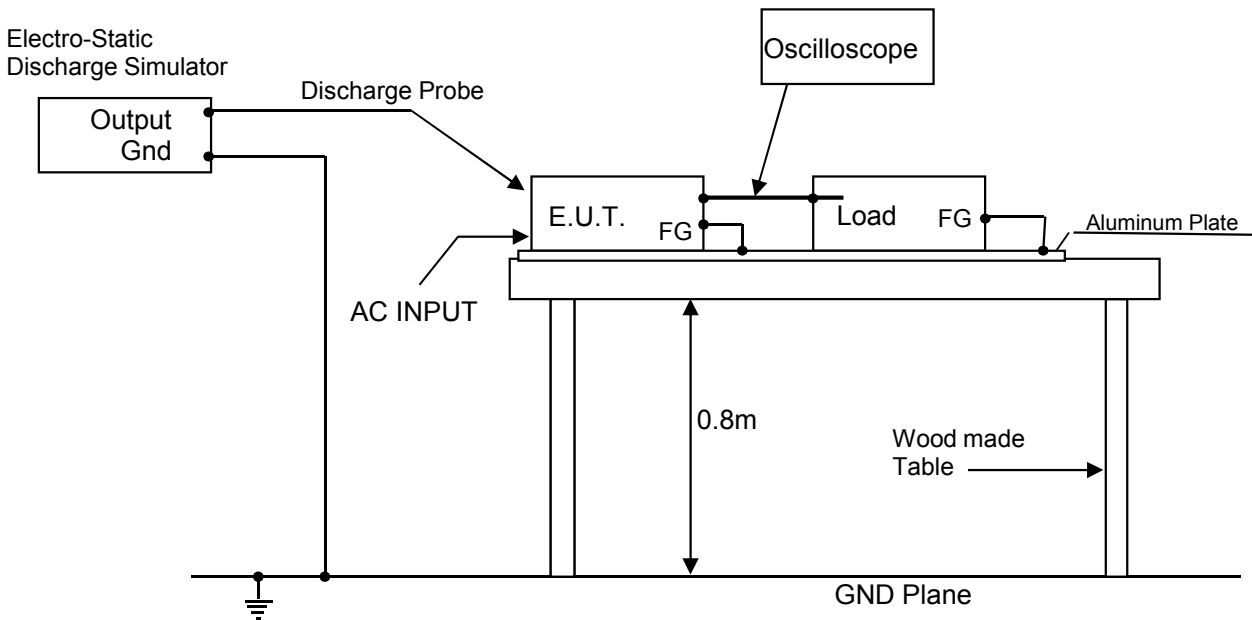

(4) Acceptable conditions

1. Output voltage regulation not to exceed $\pm 5\%$ of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(5) Test Result

Contact Discharge (kV)	RFE2500	Air Discharge (kV)	RFE2500
4	PASS	8	PASS


2.Radiated Radio-Frequency Electromagnetic Field Immunity Test (IEC61000-4-3)

(1)Equipment used

Test Laboratory: Hermon Laboratories Ltd.

(2)Test conditions

Input voltage:	Rated	Output voltage:	Rated
Output current:	100%	Amplitude Modulated:	80%, 1kHz
Electromagnetic Frequency:	80~1000MHz	Ambient temperature:	25°C
Distance:	2.4m	Wave Angel:	Horizontal and Vertical
Sweep condition:	1.0% Step Up, 2.0 second Hold		
Test Angle:	Top/Bottom, Both Sides, Front/Back		

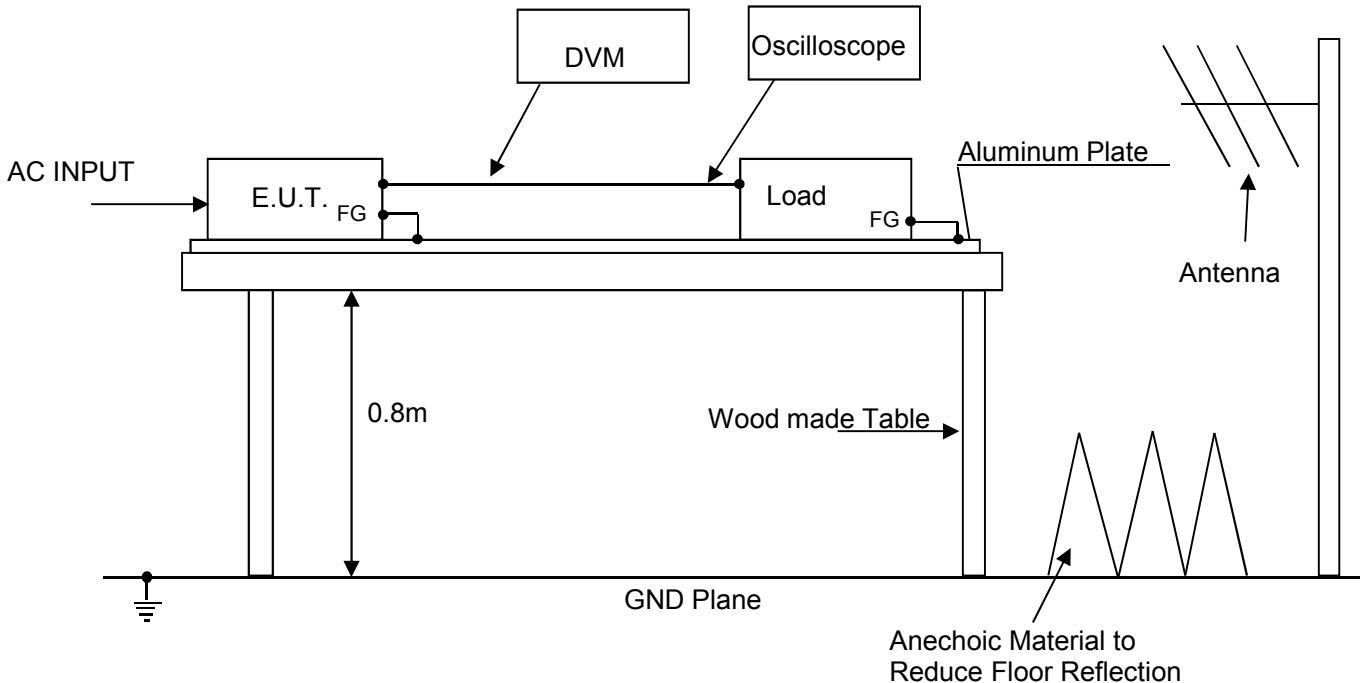

(3)Acceptable conditions

1. Output voltage regulation not to exceed $\pm 5\%$ of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(4)Test Result

Radiated Field Strength (V/m)	RFE2500
3	PASS

3.Electrical Fast Transient / Burst Immunity Test (IEC61000-4-4)

(1)Equipment used


EFT/B Generator: NSG 3060, CDN3063 TESEQ

(2)Test conditions

Input voltage:	Rated	Output voltage:	Rated
Output current:	100%	Test time:	1 minute
Polarity:	-,+	Ambient temperature:	25°C
Number of tests:	3 times		

(3)Test method and Device test point: Neutral (N),Line (L), Ground (FG)

Apply pulses from EFT/B Generator to N,L,FG separately,as well as,all at the same time.

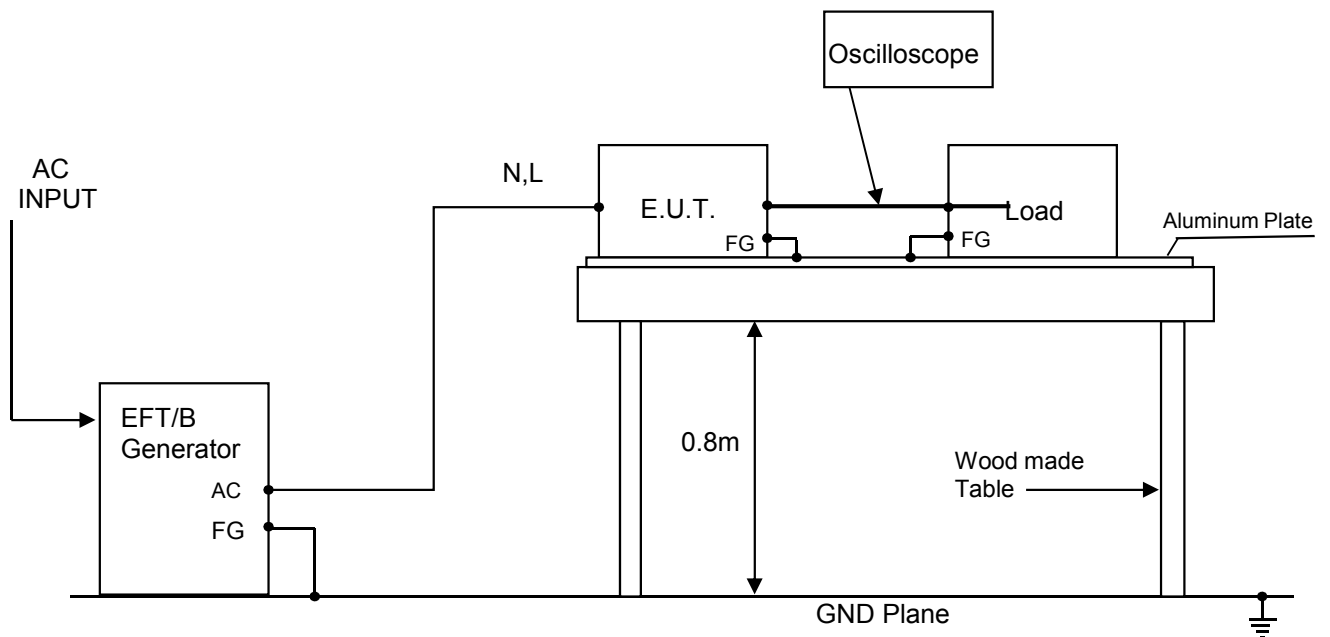

(4)Acceptable conditions

- 1.Output voltage regulation not to exceed $\pm 5\%$ of initial (before test) value during test.
- 2.Output voltage to be within regulation specification after the test.
- 3.Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(5)Test Result

Test Voltage (kV)	Repetition Rate (kHz)	RFE2500
2	5	PASS


4.Surge Immunity Test (IEC61000-4-5)

(1)Equipment used

Surge Generator: NSG 3060 TESEQ
 Coupling impedance: Common - 12 Ohm
 Normal - 2 Ohm
 Coupling capacitance: Common - 9 uF
 Normal - 18 uF
 Coupling network: CDN3063 TESEQ

(2)Test method and devise test point

Input voltage: Rated Output voltage: Rated
 Output current: 100% Number of tests: 5 times
 Polarity: -,+ Mode: Common, Normal
 Phase: 0,90 DEG. Ambient temperature: 25°C

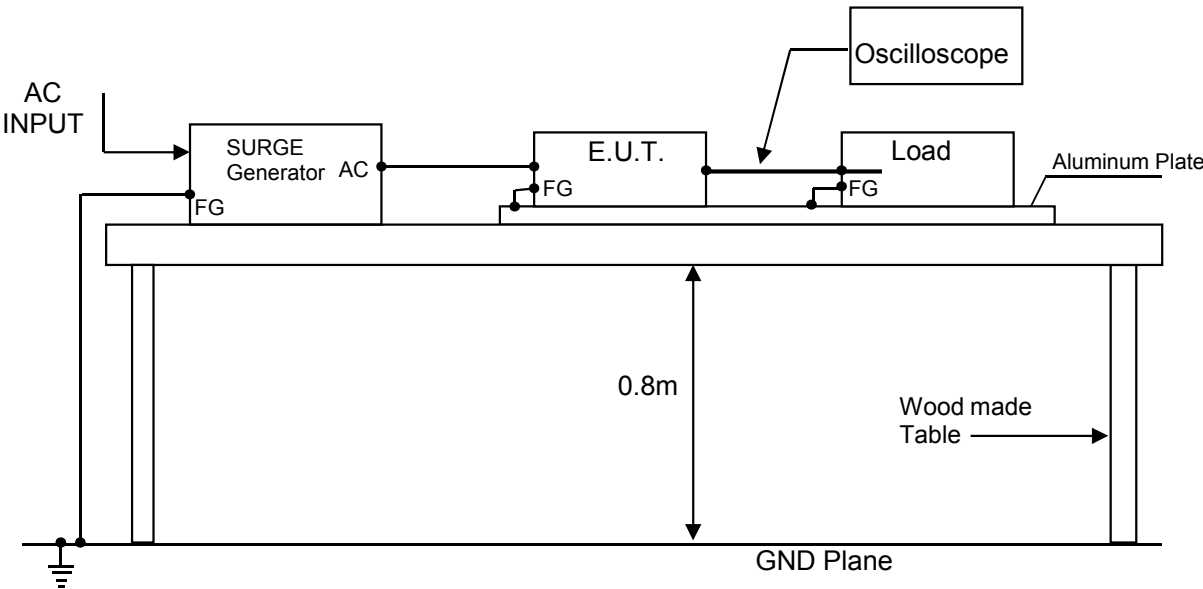

(3)Acceptable conditions

1. Output voltage regulation not to exceed ± 5% of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(4)Test Result

Test Voltage (kV) Common	RFE2500	Test Voltage (kV) Normal	RFE2500
2.0	PASS	2.0	PASS
4.0	PASS		

6.Power Frequency Magnetic Field Immunity Test (IEC61000-4-8)

(1)Equipment used

AC High Current Generator for
Magnetic Field immunity tests:

HL, MFG-130A

(2)Test Condition:

Input voltage: Rated

Output voltage: Rated

Output current: 100%


Frequency: 50Hz

Magnetic Field Strength: 30A/m

Ambient temperature:25°C

Duration Time: 10min.

(3)Test Method:

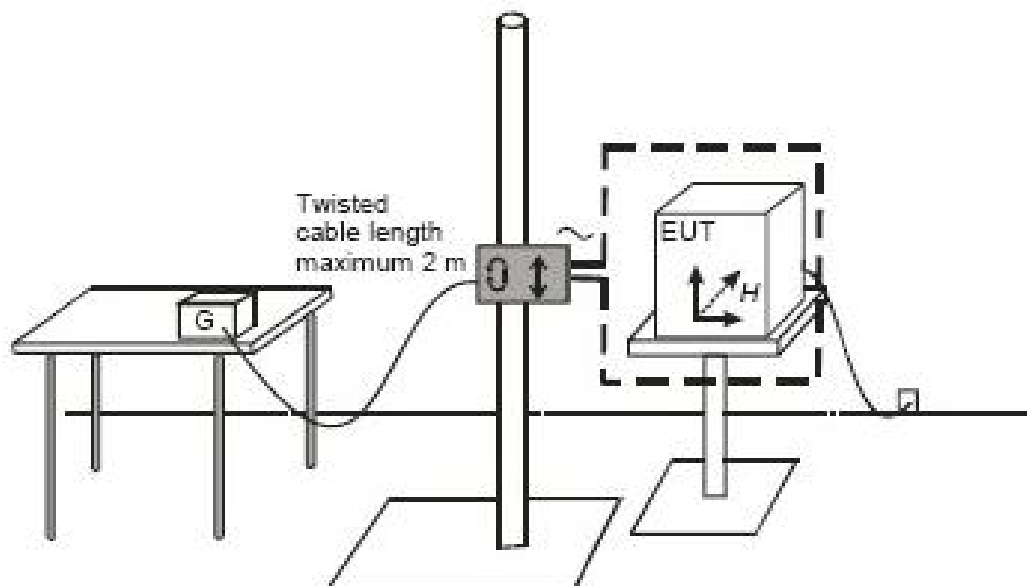

(4)Acceptable conditions

- 1.Output voltage regulation not to exceed $\pm 5\%$ of initial (before test) value during test.
- 2.Output voltage to be within regulation specification after the test.
- 3.Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(5)Test Result

EUT positions	Result
X	PASS
Y	PASS
Z	PASS

7.Voltage Dips,Short Interruptions Immunity Test (IEC61000-4-11)

(1)Equipment used

Voltage Dips Generator:

CI, 5001ix

Oscilloscope:

Yokogawa, DL1740EL

(2)Test Condition:

Input voltage: Rated

Output voltage: Rated

Output current: 100%


Frequency: 50Hz

Repetition: 0.1Hz

Ambient temperature:25°C

Number of pulse: 3

(3)Test Method:

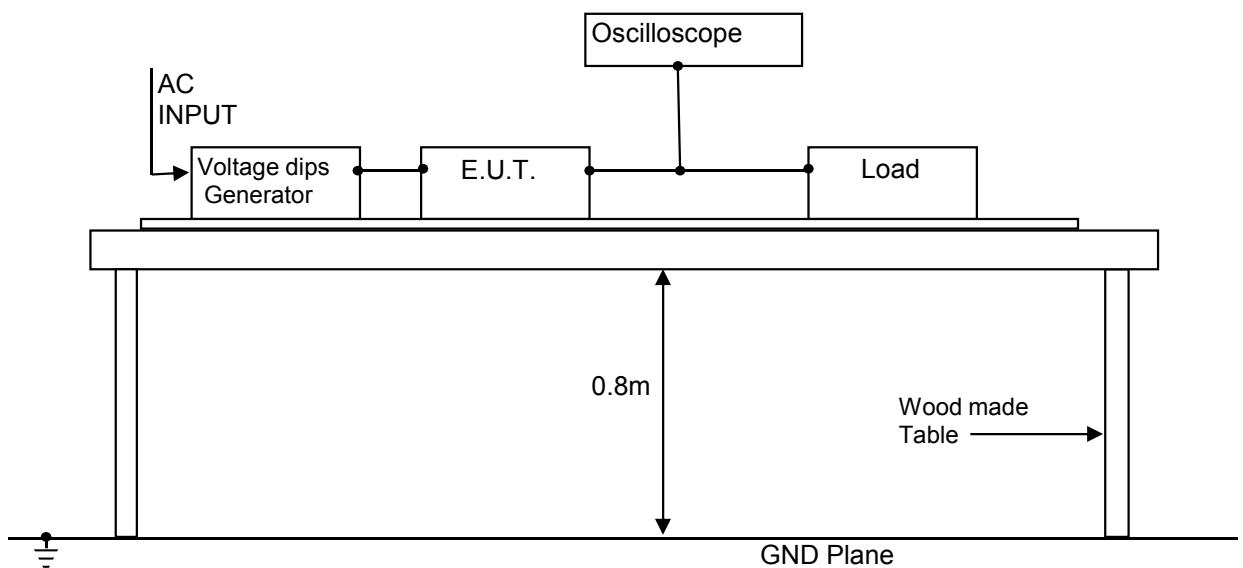

(4)Acceptable conditions

- 1.Output voltage to be within output voltage regulation specification after the test
- 2.No discharge of fire or smoke

(5)Test Result

Dip rate	Continue time	Result
30% voltage dip	500ms	PASS
60% voltage dip	200ms	PASS
>95% voltage dip	20ms; 5,000ms	PASS




8.Input Current Harmonics Test (IEC61000-3-2)

Model: RFE2500-24

(1)Equipment used
 AC Power Analyzer:
 PACS-1(California Instruments)
 AC Source:
 Chroma 6590

(2)Test conditions:
 Input voltage: 115VAC;230VAC
 Output current: 100%

(3)Test Method:

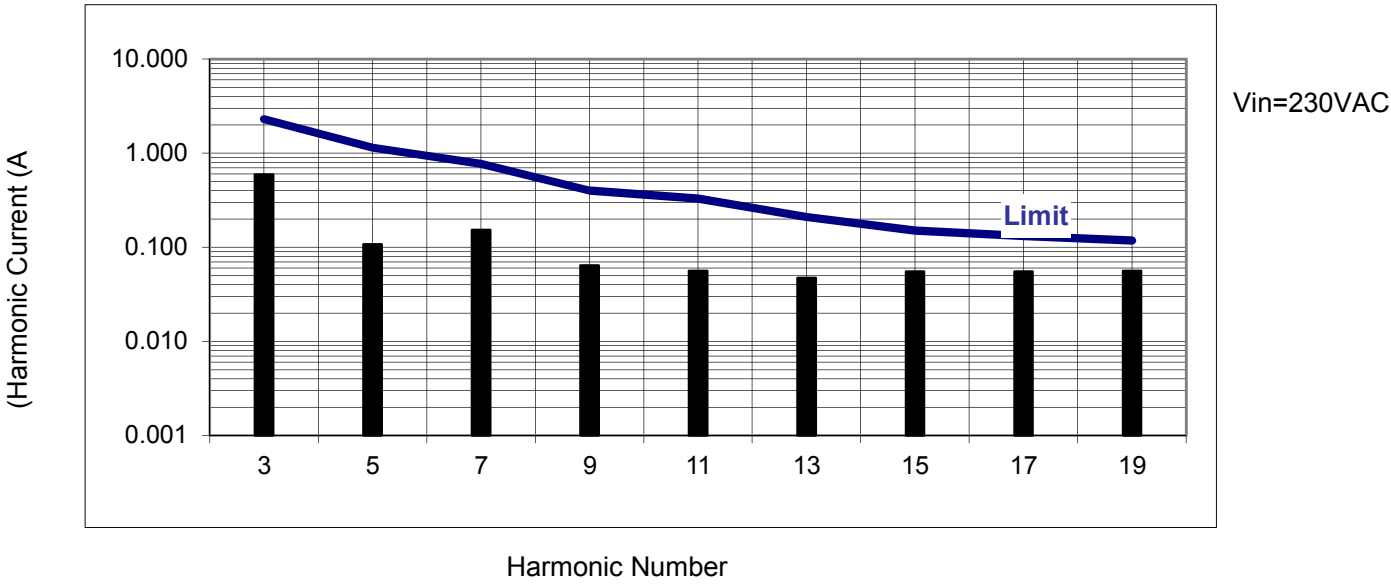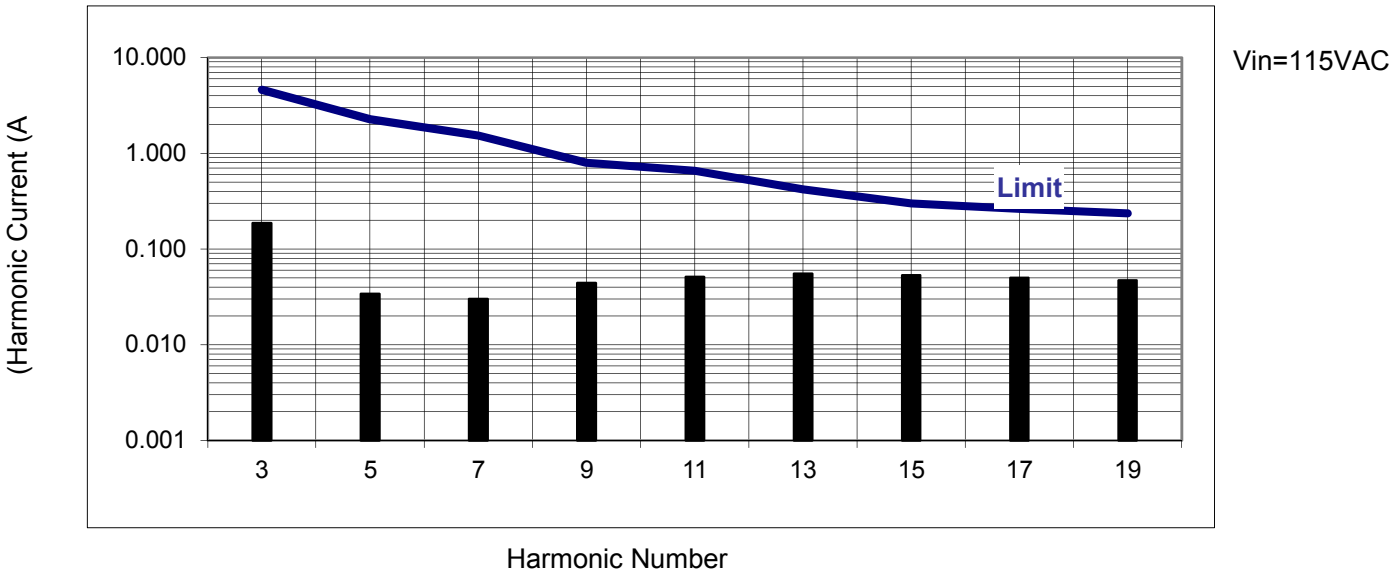

Vin	HARMONICS								
	3	5	7	9	11	13	15	17	19
115 VAC	4.600	2.280	1.540	0.800	0.660	0.420	0.300	0.264	0.236
230 VAC	2.300	1.140	0.770	0.400	0.330	0.210	0.150	0.132	0.118

Input Current Harmonics EN61000-3-2 Limit
 Input Current Harmonics-Measurement