

HMS50

SPECIFICATIONS

A275-01-01

ITEMS		MODEL	HMS50 -5	HMS50 -12	HMS50 -15	HMS50 -24	HMS50 -48	
1	Nominal Output Voltage	V	5	12	15	24	48	
2	Maximum Output Current	A	10	4.3	3.5	2.2	1.1	
3	Maximum Output Power	W	50.0	51.6	52.5	52.8	52.8	
4	Efficiency (Typ.) (*1)	100VAC	%	82	83	83	84	84
		200VAC	%	84	85	86	87	86
5	Input Voltage Range (*2)	-	85 - 265VAC (47 - 63Hz) or 80 - 370VDC 75-85VAC : Operation time within 20 seconds.					
6	Input Current (Typ.) (*1)	A	0.65/0.35					
7	Inrush Current (Typ.) (*1)(*3)	-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start					
8	PFHC	-	Designed to meet IEC61000-3-2					
9	Power Factor (Typ.) (*1)	-	0.97/0.91					
10	Output Voltage Range	V	4.0 - 6.4	9.0 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8	
11	Maximum Ripple & Noise (*4)	0≤Ta≤70°C	mV	120	150	150	150	200
		-10≤Ta<0°C	mV	160	180	180	180	240
12	Maximum Line Regulation (*5)	mV	20	48	60	96	192	
13	Maximum Load Regulation (*6)	mV	40	96	120	150	240	
14	Temperature Coefficient	-	Less than 0.02% / °C					
15	Over Current Protection (*7)	A	10.5 ≤	4.51 ≤	3.67 ≤	2.31 ≤	1.15 ≤	
16	Over Voltage Protection (*8)	V	6.67 - 7.73	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8	
17	Hold-up Time (Typ.) (*1)	-	20ms					
18	Leakage Current (*9)	-	Less than 0.5mA. 0.2mA (Typ) at 100VAC / 0.4mA (Typ) at 230VAC					
19	Remote Sensing	-	-					
20	Remote ON/OFF Control	-	-					
21	Parallel Operation	-	-					
22	Series Operation	-	Possible					
23	Operating Temperature (*10)	-	-10 to +70°C (-10 to +50°C:100%, +60°C:60%, +70°C:20%)					
24	Operating Humidity	-	30 to 90%RH (No Condensing)					
25	Storage Temperature	-	-30 to +85°C					
26	Storage Humidity	-	10 to 95%RH (No Condensing)					
27	Cooling	-	Convection Cooling					
28	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min					
29	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC					
30	Vibration	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.					
31	Shock	-	Less than 196.1m/s ²					
32	Line DIP	-	Designed to meet SEMI-F47 (200VAC Line only)					
33	Conducted Emission (*11)	-	Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B					
34	Radiated Emission (*11)	-	Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B					
35	Immunity (*11)	-	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
36	Weight (Typ)	-	300g					
37	Size (W x H x D)	mm	31.5 x 82 x 120 (Refer to Outline Drawing)					

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.

*2. Output derating needed when input voltage less than 110VDC and 85VAC.

Refer to OUTPUT DERATING CURVE.(A275-01-02_, A275-01-03_)

*3. Not applicable for the inrush current to Noise Filter for less than 0.2ms.

*4. Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.

*5. 85 - 265VAC, constant load.

*6. No load-Full load, constant input voltage.

*7. Hiccup with automatic recovery.

Avoid to operate at over load or short circuit condition.

*8. OVP circuit will shut down output, manual reset (Re power on).

*9. Measured by the each measuring method of IEC60950-1 (at 60Hz), Ta=25°C.

*10. Output Derating

- Derating at standard mounting. Refer to OUTPUT DERATING CURVE.(A275-01-02_, A275-01-03_)

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

*11. The power supply is considered a component which will be installed into a final equipment.

The final equipment should be re-evaluated that it meets EMC directives.

HMS50

OUTPUT DERATING (AC INPUT)

A275-01-02

•Derating to input voltage : $85VAC \leq Vin \leq 265VAC$


Ta(°C)	LOAD(%)		
	MOUNTING A	MOUNTING B,D	MOUNTING C
-10 to +40	100	100	100
50	100	76	73
60	60	53	46
70	20	30	20

•Derating to input voltage : $75VAC \leq Vin < 85VAC$ *1


Ta(°C)	LOAD(%)		
	MOUNTING A	MOUNTING B,D	MOUNTING C
-10 to +50	60	60	60
60	60	53	46
70	20	30	20

*1. Operation time within 20 seconds.

•Derating to input voltage : $85VAC \leq Vin \leq 265VAC$

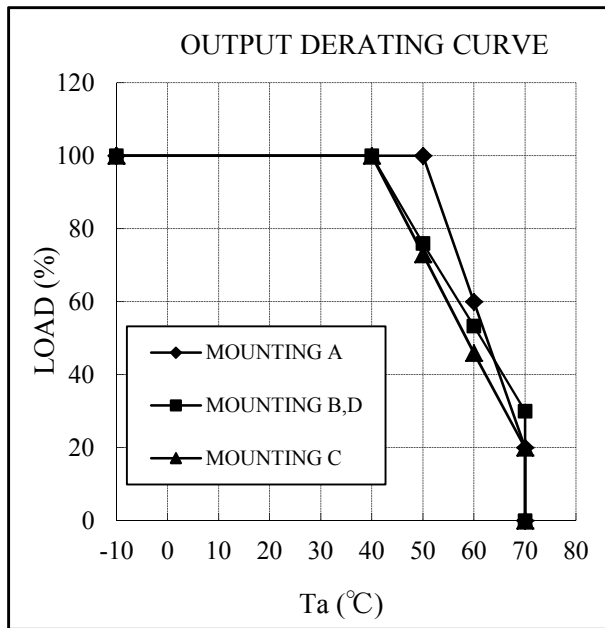

•Derating to input voltage : $75VAC \leq Vin < 85VAC$

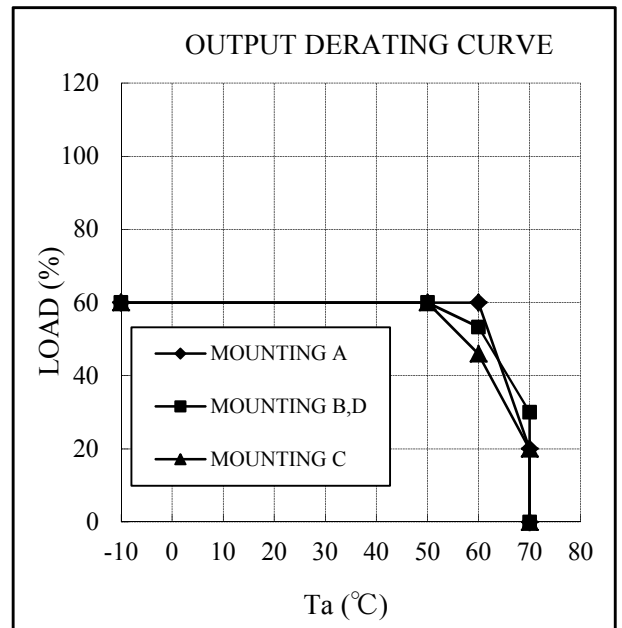

MOUNTING A


MOUNTING B

MOUNTING C

MOUNTING D

DON'T USE

(STANDARD MOUNTING)

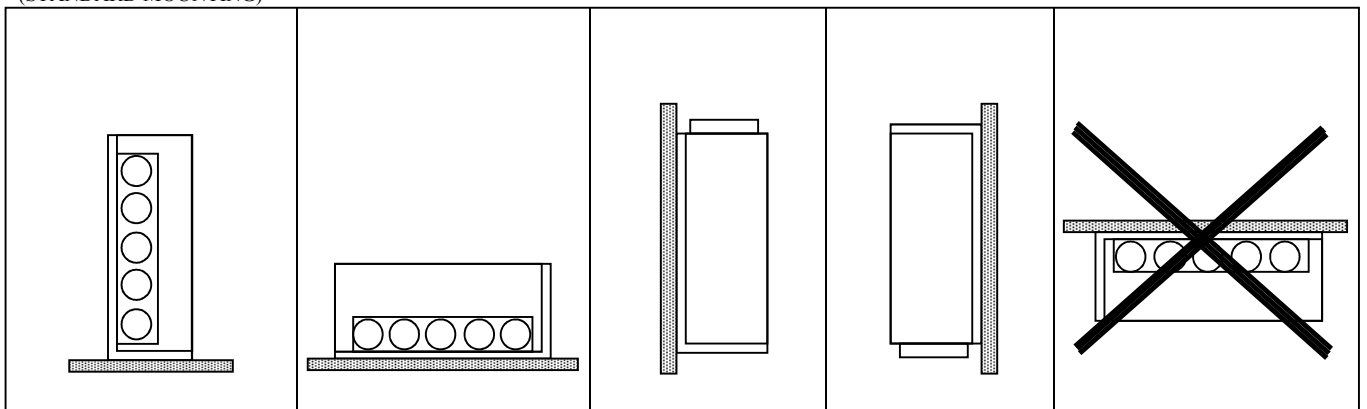

HMS50

OUTPUT DERATING (DC INPUT)

A275-01-03


• Derating to input voltage : $110\text{VDC} \leq V_{in} \leq 370\text{VDC}$

Ta(°C)	LOAD(%)		
	MOUNTING A	MOUNTING B,D	MOUNTING C
-10 to +40	100	100	100
50	100	76	73
60	60	53	46
70	20	30	20


• Derating to input voltage : $80\text{VDC} \leq V_{in} < 110\text{VDC}$

Ta(°C)	LOAD(%)		
	MOUNTING A	MOUNTING B,D	MOUNTING C
-10 to +40	80	80	80
50	80	61	58
60	48	42	37
70	16	24	16

• Derating to input voltage : $110\text{VDC} \leq V_{in} \leq 370\text{VDC}$

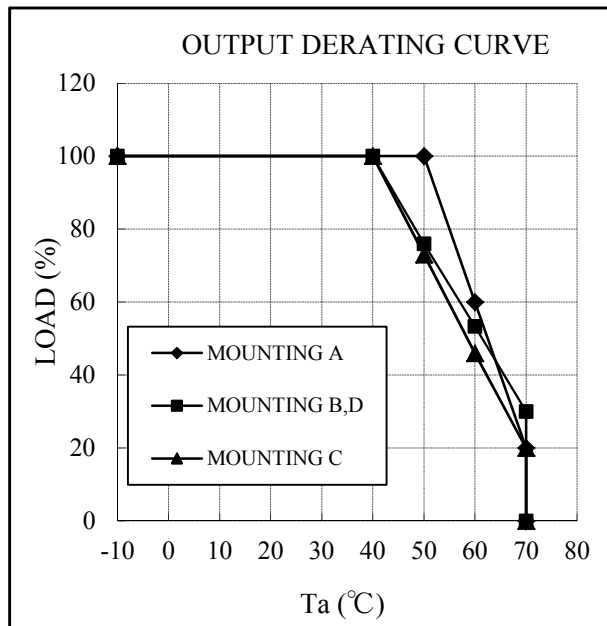

• Derating to input voltage : $80\text{VDC} \leq V_{in} < 110\text{VDC}$

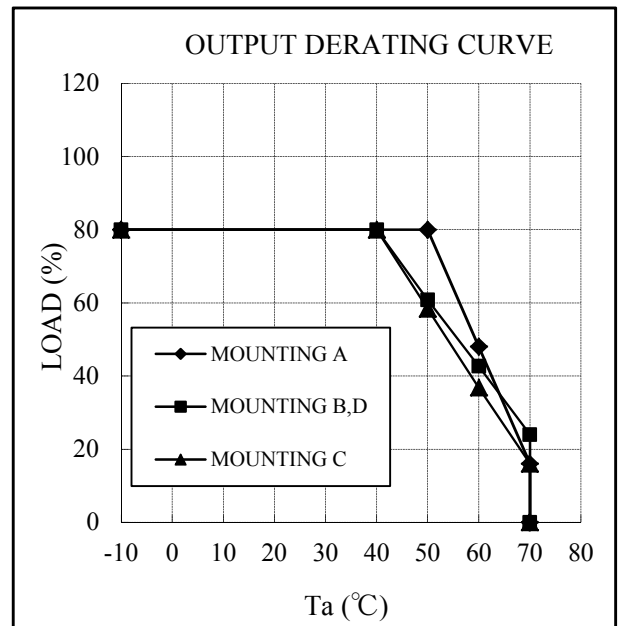

MOUNTING A

(STANDARD MOUNTING)

MOUNTING B

MOUNTING C

MOUNTING D

DON'T USE

