

**RWS600B/CO2I**

SPECIFICATIONS


A262-01-01/CO2I

ITEMS		MODEL	RWS600B-12/CO2	RWS600B-24/CO2	RWS600B-48/CO2
Part No			RWS600B-12/CO2I	RWS600B-24/CO2I	RWS600B-48/CO2I
1	Nominal Output Voltage	V	12	24	48
2	Maximum Output Current	A	50	25	12.5
3	Maximum Output Power	W	600	600	600
4	Efficiency (Typ)	100/115VAC	81 / 82	84 / 85	85 / 85
		(*1)(*11) 200/230VAC	84 / 84.5	88 / 88.5	88 / 88.5
5	Input Voltage Range	(*2)(*11)	85 - 265VAC (47 - 63Hz) or 120 - 330VDC		
6	Input Current (Typ)	100/115VAC	7.2 / 6.6		
		(*1)(*11) 200/230VAC	4.0 / 3.6		
7	Inrush Current (Typ)	(*1)(*3)(*11)	20A at 100VAC, 40A at 200VAC, Ta=25°C		
8	PFHC	-	Designed to meet IEC61000-3-2		
9	Power Factor (Typ)	(*1)(*11)	0.95 at 100VAC, 0.90 at 200VAC		
10	Output Voltage Range	V	10.8 - 13.8	21.6 - 27.6	43.2 - 52.8
11	Maximum Ripple & Noise	0<Ta<70°C	150	150	200
		(*4) -20<Ta<0°C	180	180	500
12	Maximum Line Regulation	(*5)(*11)	48	96	192
13	Maximum Load Regulation	(*6)(*11)	96	192	384
14	Temperature Coefficient	-	Less than 0.02% / °C		
15	Over Current Protection	(*7)	52.5 ≤	26.3 ≤	13.1 ≤
16	Over Voltage Protection	(*8)	14.4 - 16.8	28.8 - 33.6	55.2 - 64.8
17	Hold-up Time (Typ)	(*12)	20ms		
18	Leakage Current	(*9)	Less than 0.75mA		
19	Remote Control	-	Option		
20	Parallel Operation	-	Option		
21	Series Operation	-	Possible		
22	Operating Temperature	(*10)(*11)	-20 to +70°C (-20 to +50°C : 100%, +70°C : 50%)		
23	Operating Humidity	-	30 to 90%RH (No Condensing)		
24	Storage Temperature	-	-30 to +75°C		
25	Storage Humidity	-	10 to 90%RH (No Condensing)		
26	Cooling	-	Forced Air Cooling		
27	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (100mA) for 1min		
28	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output to Chassis : 500VDC		
29	Vibration	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s <sup>2</sup> Constant, X,Y,Z 1hour each.		
30	Shock	-	Less than 196.1m/s <sup>2</sup>		
31	Safety	-	Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1 UL508 (24V Only), CSA C22.2 No.107.1-01. (24V Only), IS13252 (Part 1). Designed to meet Den-an Appendix 8 at 100VAC only.		
32	Line DIP	-	Designed to meet SEMI-F47 (200VAC Line only)		
33	Conducted Emission	(*14)	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B		
34	Radiated Emission	(*13)(*14)	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B		
35	Immunity	(*14)	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11		
36	Weight (Typ)	g	1600		
36	Size (W x H x D)	mm	61 x 120 x 190 ( Refer to Outline Drawing )		
37	Other	(*15)	PCB Coating on component side and solder side.		

\*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- \*1. At Ta=25°C, nominal output voltage and maximum output power.
- \*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50-60Hz).
- \*3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- \*4. Please refer to Fig. A for measurement of Vo, line & load regulation and ripple voltage.
- \*5. 85 - 265VAC, constant load.
- \*6. No load-Full load, constant input voltage.
- \*7. 12V model: Constant current limit and hiccup with automatic recovery.  
24V, 48V model: Constant current limit with automatic recovery.  
Avoid to operate at over load or short circuit condition.
- \*8. OVP circuit will shut down output, manual reset (Re power on).
- \*9. Measured by the each measuring method of UL, CSA, EN and Den-an(at 60Hz), Ta=25°C.
- \*10. Output Derating
  - Derating at standard mounting. Refer to LOAD vs. AMBIENT TEMPERATURE (A262-01-02\_ ).
  - Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.
- \*11. Output derating needed when input voltage less than 110VAC. Refer to LOAD vs. INPUT VOLTAGE (A262-01-02\_ ).
- \*12. At 110VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.
- \*13. With clamp filter (TDK ZCAT3035-1330) on input line.
- \*14. The power supply is considered a component which will be installed into a final equipment.  
The final equipment should be re-evaluated that it meets EMC directives.
- \*15. For "/CO2I" model, both sides of PCB are coated. However, some areas on PCB are not coated.

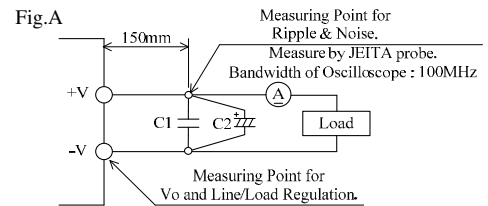

C1 : Film Cap. 0.1μF  
C2 : Elect. Cap. 100μF