


## 1008W Isolated Quarter Brick DC-DC Converter



Test

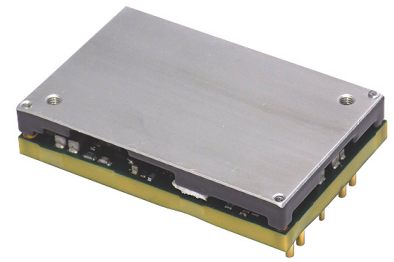

COMM



Broadcast

The iQK series of isolated DC-DC converters provide a fully regulated 11.2V output. Rated at 1008W, the quarter brick sized module can deliver up to 90A output current. Its 48 to 56Vdc input range is suitable for use with regulated 48V front end supplies, primarily employed in computing, server and data communications applications. Featuring a high efficiency of up to 97%, it is ideal for use in distributed power architectures.

### Features

- 1008W in a Quarter Brick Footprint
- High Efficiency - Up to 97%
- Baseplate Cooled
- Constant Switching Frequency
- Optional Droop Current Share

### Benefits

- High Power Density, Less Board Area Needed
- Lower Dissipated Power
- Suitable for Cold plate or Heatsink Mounting
- Simplified EMI Filtering
- Easier to Connect in Parallel

### Model Selector

Model	Input Voltage(1) (V)	Output Voltage (V)	Max Current (A)	Max Power (W)	Efficiency (%)	Droop Load Share	Integrated Baseplate
<a href="#">iQK4N090A112V-1U9-R</a>	48 - 56	11.2	90	1008	96%	Yes	Yes
<a href="#">iQK4N090A112V-1V9-R</a>	48 - 56	11.2	90	1008	96%	No	Yes

#### Preferred Model

#### Notes


(1) Operation down to 45V input is possible. Output voltage will decrease as the load current increases.

Specification		
Model	iQK	
<b>Input</b>		
Input Voltage Range	Vdc	48 - 56 (Operation down to 45V with increased output regulation)
Input Transient (max)	Vdc	80 (100 ms)
Input Current (max)	A	22.5
Turn-on Voltage (typ)	Vdc	46.3
Turn-off Voltage (typ)	Vdc	43.6
Hysteresis	Vdc	2.7
Efficiency (750 W)	%	97
Efficiency (1008 W)	%	96.5
Safety Agency Certifications	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark
<b>Output</b>		
Output Voltage Initial Setpoint	%	± 1 (Nominal input voltage, no load)
Output Voltage Tolerance	%	± 2 (Across rated input and temperature range)
Output Voltage Adjustment Range	-	None
Switching Frequency	kHz	132
Line Regulation (Io = 50%)	mV	30
Load Regulation	mV/A	30
Load Share Accuracy (1U9-R)	%	± 10
External Load Capacitance	uF	1600 - 8000 (ESR > 2 mΩ)
Ripple & Noise (typ)	mVpp	170
Overcurrent Protection Threshold (typ)	A	92 - 99 (Non-Latching)
Overtemperature Protection	-	Yes
Over Voltage Protection	V	12.9 - 14.0 (Latching)
Remote Sense	-	None
Remote On/Off	-	Negative Logic
Power Good	-	Open-Drain, Active Low
<b>Environmental</b>		
Operating Baseplate Temperature (Tc)	°C	-40 to 119
Storage Temperature	°C	-55 to 125
Humidity (non condensing)	%RH	5 - 95 (Operating & Storage)
Cooling	-	Convection, conduction (baseplate) or forced air
Isolation Voltage (max)	Vdc	707 (Input to Output)
Isolation Capacitance	pF	700
Isolation Resistance	MΩ	> 15
<b>Other</b>		
Weight (max)	g	90
Size (LxWxH)	mm	57.91 x 36.83 x 14.48
Size (LxWxH)	Inches	2.28 x 1.45 x 0.57
MTBF - Telcordia SR-332	Hours	> 2,700,000 (Nominal Input, 100% Load, 40 °C ambient)
Warranty	yrs	3


## Notes

See website for detailed [specifications](#).

**Outline Drawing**

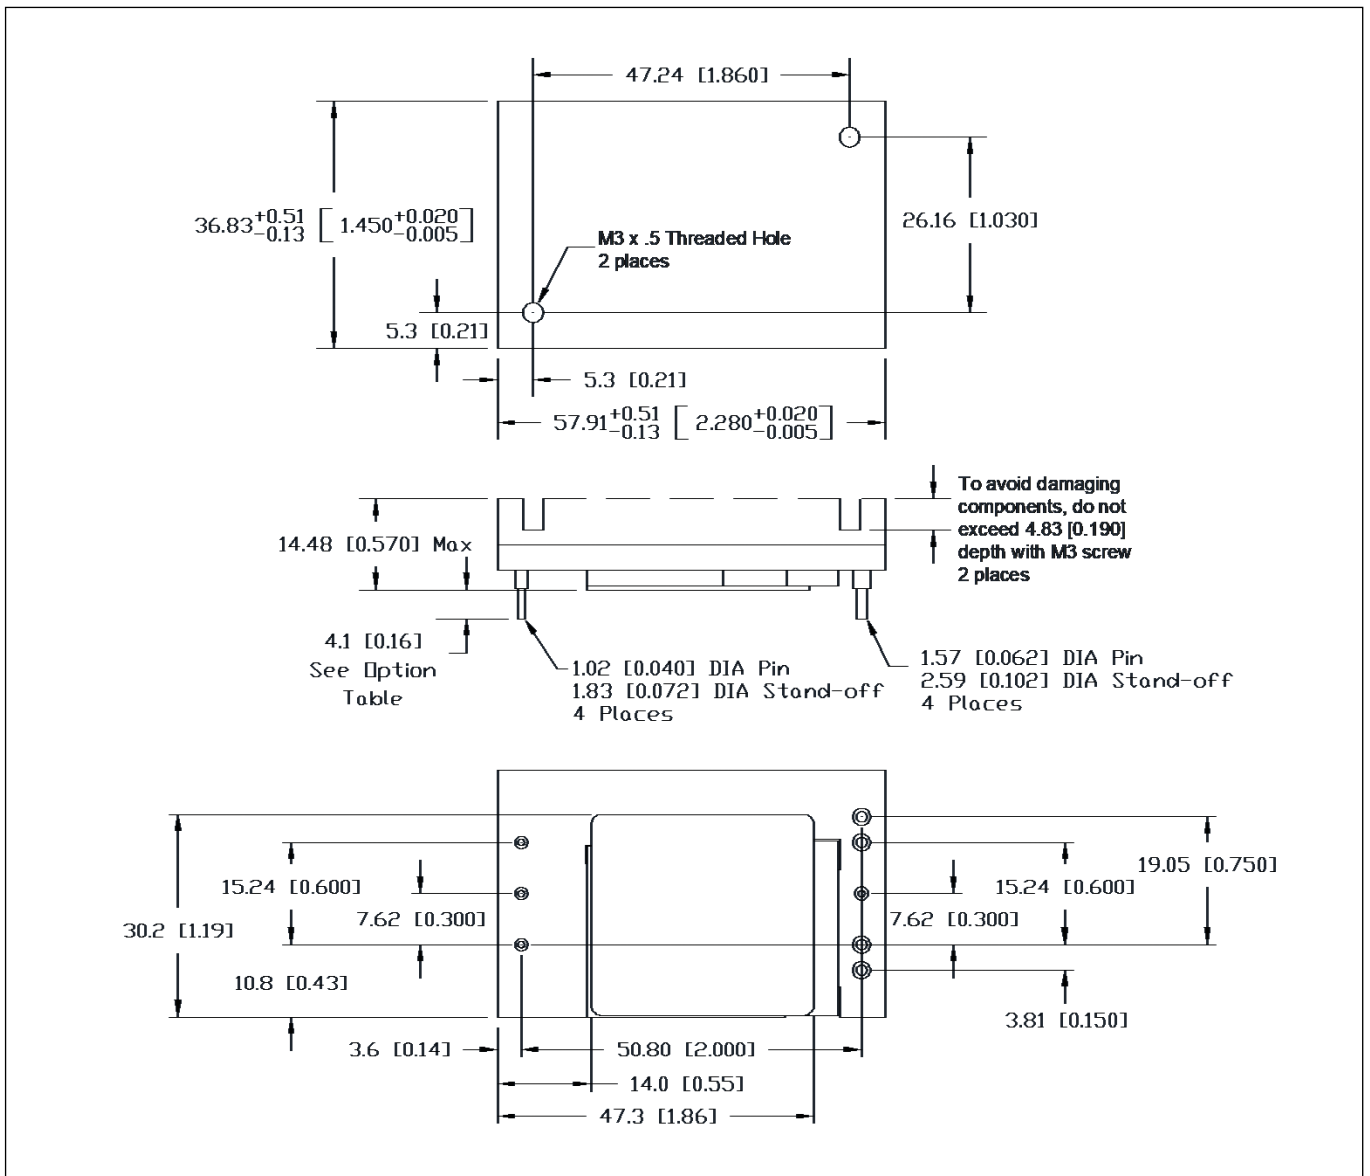


**Recommended Hole Pattern (Top View)**

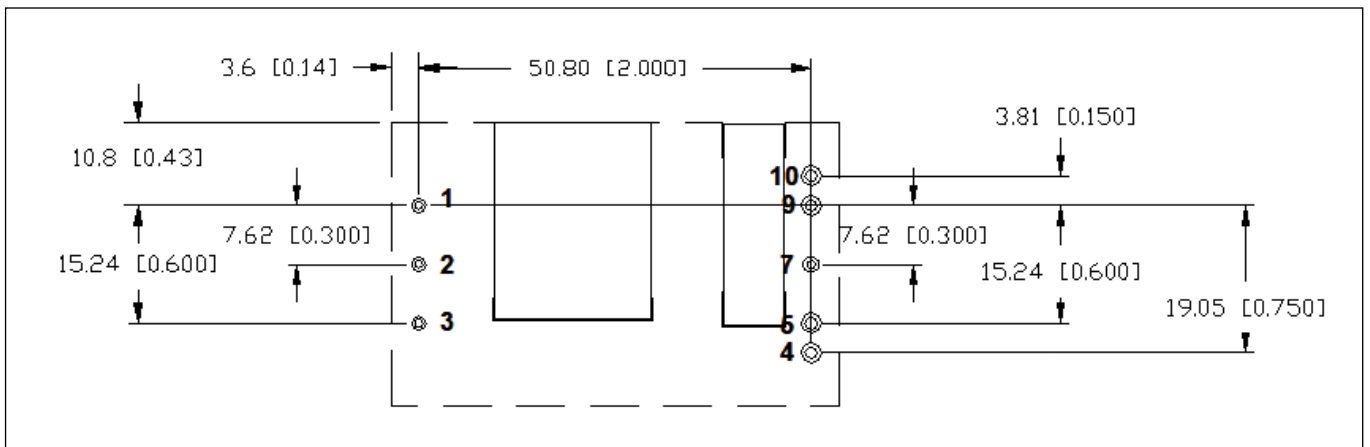

Pinout			
PIN	Function	PIN	Function
1	Vin (+)	6	N/A
2	On/Off	7	Power Good
3	Vin (-)	8	N/A
4	Vout (-)	9	Vout (+)
5	Vout (-)	10	Vout (+)


Pin base material is copper with gold plating. The maximum module weight is 90g.

**Efficiency Curve**

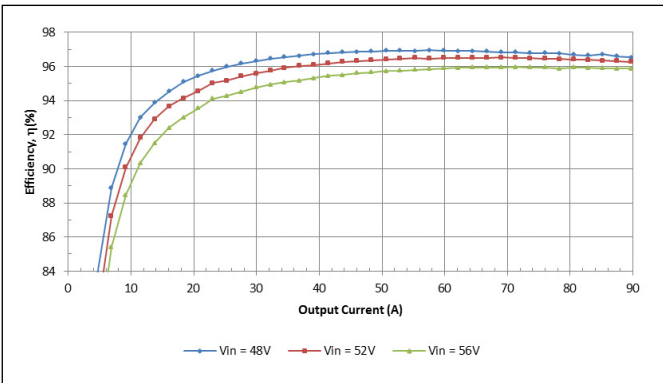


Typical Efficiency vs. Vin and Iout (no Droop).

**Power Dissipation**

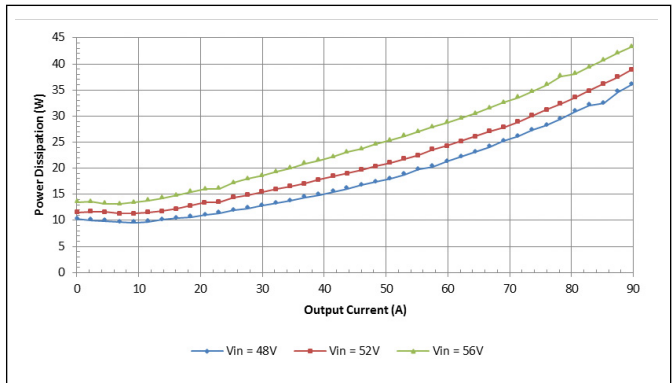

Power Dissipation vs. Vin and Iout (no Droop).

**Thermal Derating**

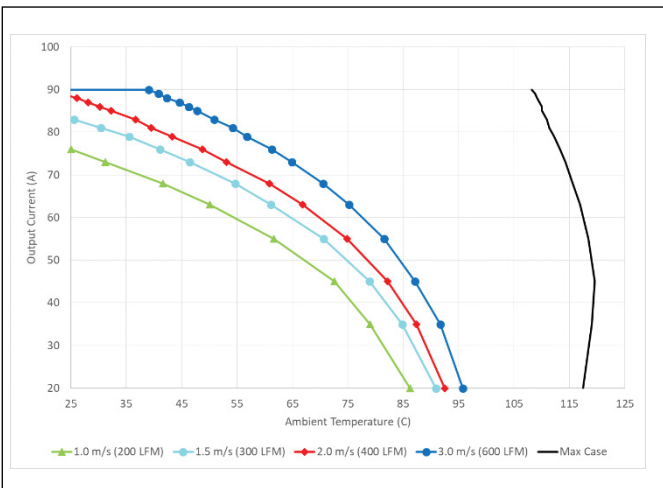

Output current vs. ambient temperature curves @ nominal input voltage, airflow direction from pin 3 to pin 1.



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



## Netherlands

info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
info.germany@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at




## Switzerland Sales Office

Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
powersolutions@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tis.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.sg.lambda.tdk.com

