

# GEN750 SERIES TEST DATA EN61000

DWG: IA584-58-01		
APPD	CHK	DWG
Doron P. Apr-3-03	Alex U. Apr-03-03	MICHAEL G. 12.03.2003

 **NEMIC-LAMBDA LTD.**

# INDEX

1. Electro-Static Discharge Test.....R-1  
EN61000-4-2
2. Radiated Susceptibility Test.....R-2  
EN61000-4-3
3. Electrical Fast Transient Burst Test.....R-3  
EN61000-4-4
4. Surge Test.....R-4  
EN61000-4-5
5. Conducted Susceptibility Test.....R-5  
EN61000-4-6
6. Input Current Harmonics Test.....R-6  
EN61000-3-2

The above data is typical value data.  
The values are considered to be actual capability data.

**NEMIC-LAMBDA**

**1. ELECTRO-STATIC DISCHARGE TEST**  
(EN61000-4-2)

(1) Equipment used

SCHAFFNER NSG435

Discharge resistance : 330 Ohm Capacity : 150 pF

(2) Test conditions

Input voltage : Rated

Output voltage : Rated

Output current : 100%

Polarity : +,-


Number of tests : 10 times

Discharge interval : >1 Second

(3) Test method and Device test point

Contact discharge : FG, Case screw

Air discharge : Input and Output terminal

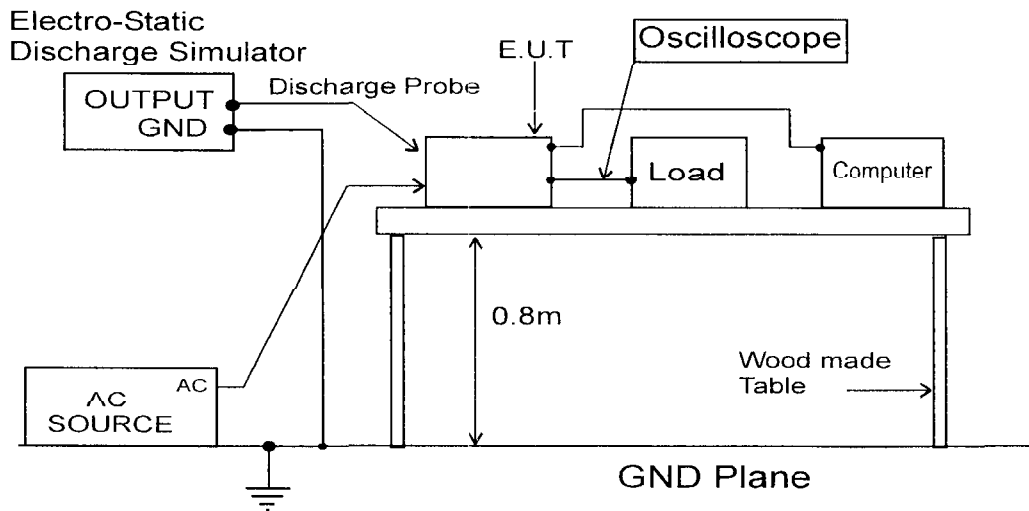

(4) Acceptable conditions

1. Output voltage regulation not to exceed  $\pm 5\%$  of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(5) Test Result

Contact Discharge (kV)	GEN6-100	GEN100-7.5	GEN600-1.3	Air Discharge (kV)	GEN6-100	GEN100-7.5	GEN600-1.3
2	PASS	PASS	PASS	4	PASS	PASS	PASS
4	PASS	PASS	PASS	8	PASS	PASS	PASS

**2.ELECTROMAGNETIC RADIATION SUSCEPTIBILITY TEST  
(EN61000-4-3)**


(1) Equipment used

Radiated immunity test chamber: 1JTEMCELL, Wayne Kerr  
 Electronic load: PLZ1003W, KIKUSUI  
 Oscilloscope: 3365A, PHILIPS  
 DVM: 8840A, FLUKE

(2) Test conditions

Input voltage : Rated                      Output voltage : Rated  
 Output current : 100%                      Amplitude Modulated: 80%, 1KHz  
 Electromagnetic                              Ambient temperature: 25°C  
 Frequency: 80~1000MHz

Sweep Condition: 1.5 x 10<sup>-3</sup> Decade/Second, 1.0 Second Hold

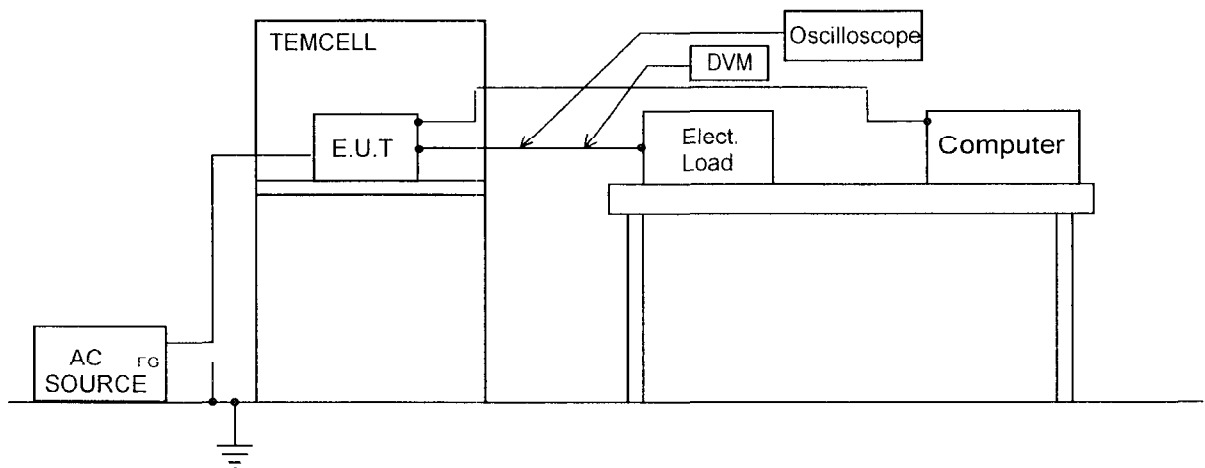

(3) Acceptable conditions

1. Output voltage regulation not to exceed ± 5% of initial (before test)value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(4) Test Result

Radiated Field Strength (V/m)	GEN6-100	GEN100-7.5	GEN600-1.3
1	PASS	PASS	PASS
2	PASS	PASS	PASS
3	PASS	PASS	PASS

### 3. ELECTRICAL FAST TRANSIENT BURST TEST (EN61000-4-4)

(1) Equipment used

EFT/B Generator: SCHAFFNER NSG2025


(2) Test conditions

Input voltage :	Rated	Output voltage :	Rated
Output current :	100%	Test time:	1 minute
Polarity:	+,-	Ambient temperature:	25°C
Number of tests:	3 times		

(3) Test method and Device test point

N,L,FG

Apply to N,L,FG separately, as well as, all at the same time.

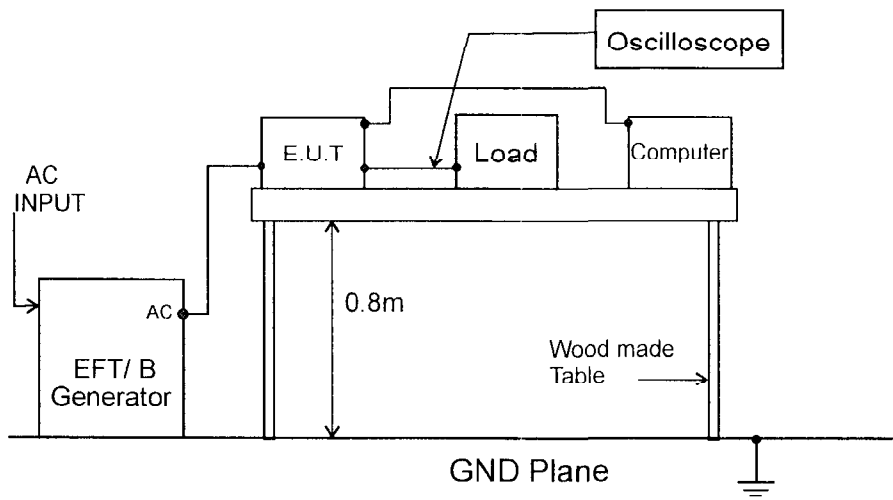

(4) Acceptable conditions

1. Output voltage regulation not to exceed  $\pm 5\%$  of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(5) Test Result

Test Voltage (kV)	Repetition Rate(kHz)	GEN6-100	GEN100-7.5	GEN600-1.3
0.5	5	PASS	PASS	PASS
1	5	PASS	PASS	PASS


**4. SURGE TEST  
(EN61000-4-5)**

(1) Equipment used

Surge Generator: SCHAFFNER - NSG651  
 Coupling impedance: Common - 12 OHm  
                           Normal - 2 OHm  
 Coupling capacitance: Common - 9uF  
                           Normal - 18uF  
 Coupling network: SCHAFFNER - CDN110

(2) Test method and device test point

Input Voltage:	Rated	Output Voltage:	Rated
Output Current:	100%	Number of tests:	5 times
Polarity:	+, -	Mode:	Common, Normal
Phase:	0, 90 DEG.	Ambient Temperature:	25 °C

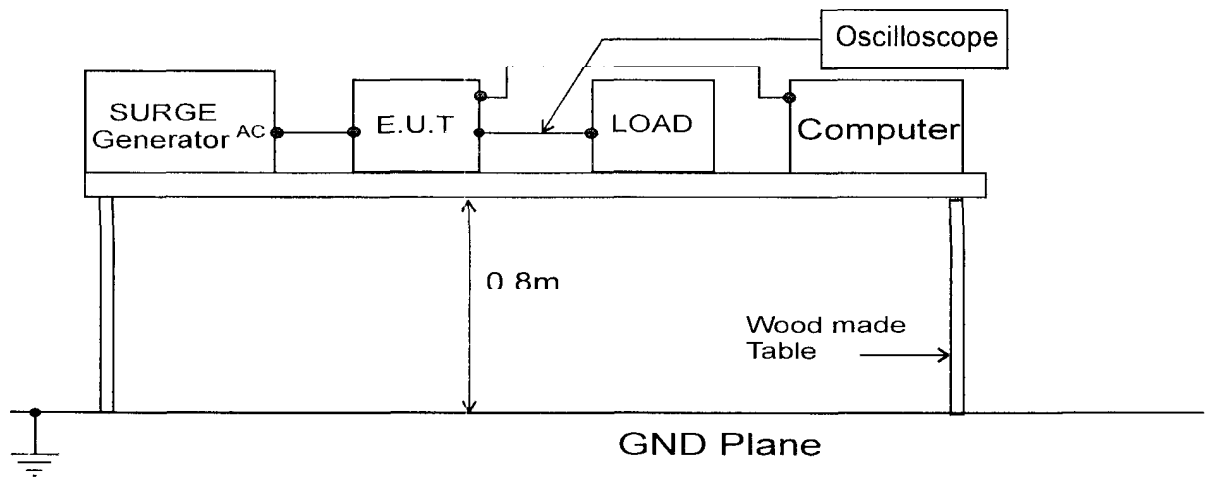

(4) Acceptable conditions

1. Output voltage regulation not to exceed  $\pm 5\%$  of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

(5) Test Result

Test Voltage (kV) Common	GEN6-100	GEN100-7.5	GEN600-1.3	Test Voltage (kV) Normal	GEN6-100	GEN100-7.5	GEN600-1.3
0.5	PASS	PASS	PASS	0.5	PASS	PASS	PASS
1.0	PASS	PASS	PASS	1	PASS	PASS	PASS
2.0	PASS	PASS	PASS				

**5. CONDUCTED SUSCEPTIBILITY TEST  
(EN61000-4-6)**


**(1) Equipment used**

RF Signal Generator 10kHz-1050 MHz	( Fluke,6061A )
RF Amplifier 10 kHz-220 MHz,150W	( Amplifier Research, 150L )
Coupling/Decoupling Network	(HL CDN 801-M3)

**(2) Test conditions**

Input Voltage:	Rated	Output Voltage:	Rated
Output Current:	100%	Electromagnetic	
		Frequency:	150KHz~80MHz
Sweep Condition:	1.0% Step Up, 2.0 Seconds Hold		
Ambient Temperature:	25°C		

**(3) Test method**

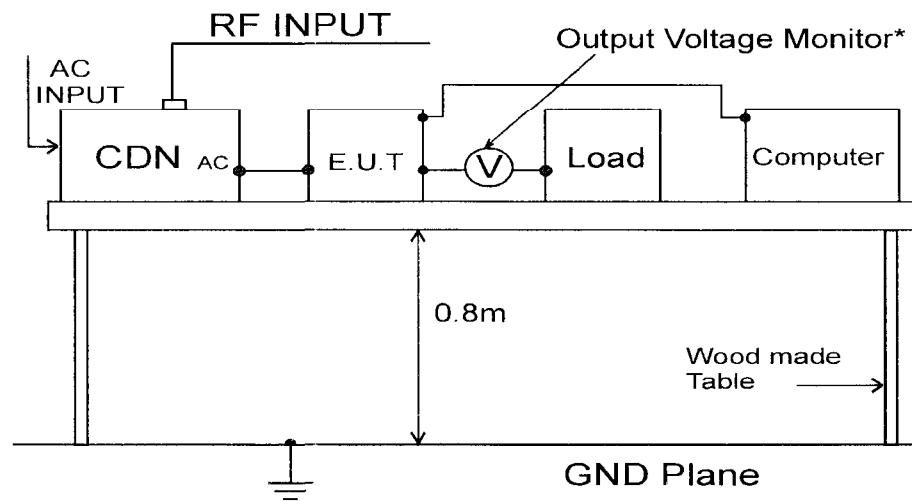

\*Used Oscilloscope or Analog Voltage Meter

**(4) Acceptable conditions**

1. Output voltage regulation not to exceed  $\pm 5\%$  of initial (before test) value during test.
2. Output voltage to be within regulation specification after the test.
3. Along with 1 and 2, no discharge of fire or smoke, as well as no output failure.

**(5) Test Result**

Voltage Level (V)	GEN6-100	GEN100-7.5	GEN600-1.3
1	PASS	PASS	PASS
2	PASS	PASS	PASS
3	PASS	PASS	PASS




**6. INPUT CURRENT HARMONICS TEST**  
 (EN61000-3-2, Class A)  
 M O D E L : GEN20-38

**GEN750**

- (1) Equipment used  
 AC POWER ANALYSER :  
 PACS-1(CALIFORNIA INSTRUMENTS)  
 AC SOURCE:  
 5001 IX (CALIFORNIA INSTRUMENTS)

- (2) Test conditions  
 Input voltage: 115 VAC; 230 VAC  
 Output current: 100%

(3) Test method

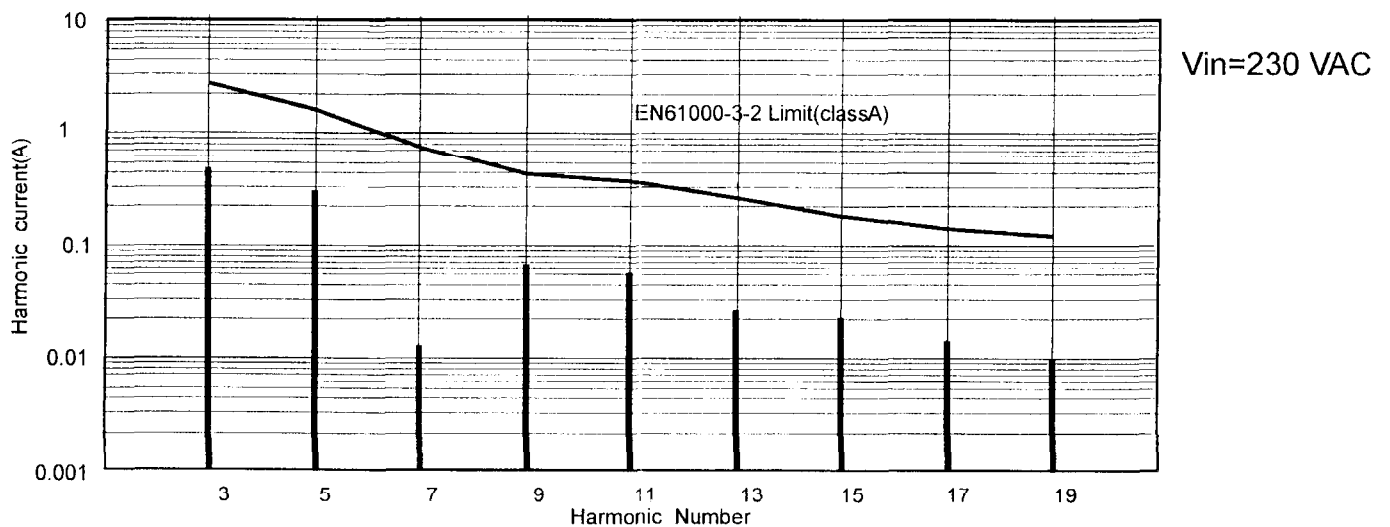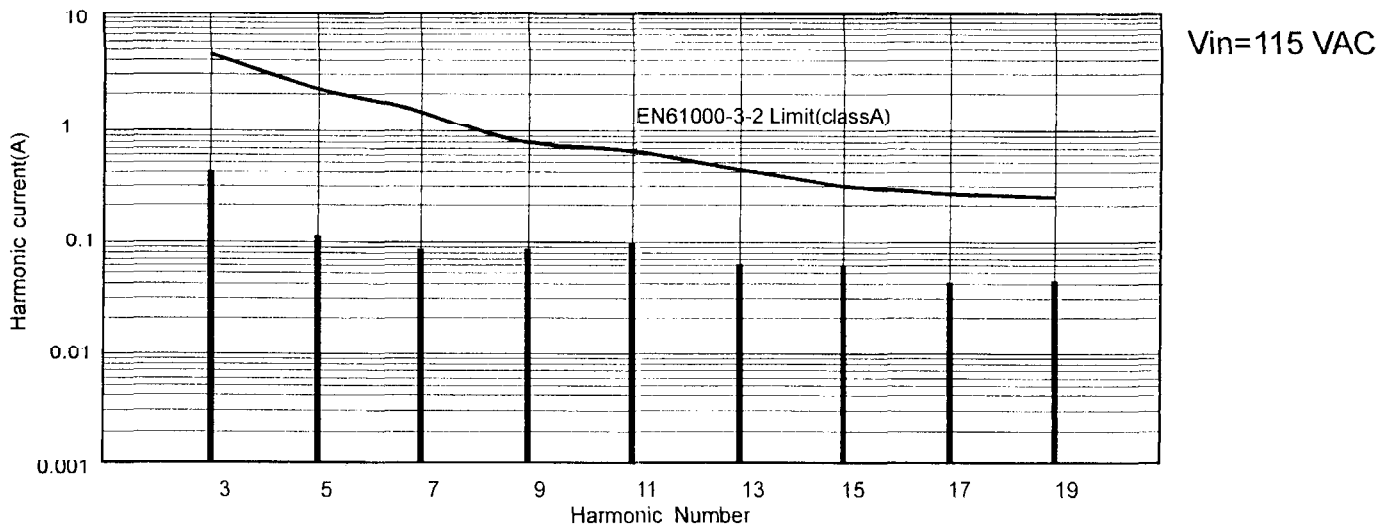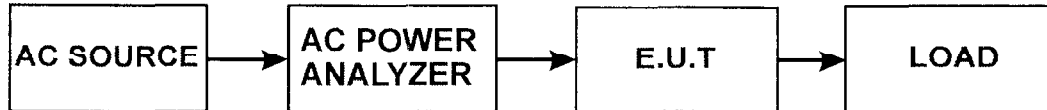

Vin	Harmonics								
	3	5	7	9	11	13	15	17	19
115 VAC	4.6	2.28	1.54	0.8	0.66	0.42	0.30	0.26	0.24
	0.415	0.125	0.088	0.082	0.100	0.063	0.061	0.041	0.043
230 VAC	2.30	1.14	0.77	0.40	0.35	0.21	0.15	0.13	0.12
	0.458	0.180	0.013	0.067	0.052	0.024	0.021	0.014	0.010

Input Current Harmonics EN61000-3-2 limit

Input Current Harmonics -Measurement